



Genesis

The Perfect Finish





Genesis


The Perfect Finish



Established in 1989 in the ceramic accessories market, Genesis quickly became a leading brand in the UK and around the world. Exporting since 1990 and now available in over 70 countries.

Since then we have diversified the range into the contract flooring, resin, landscaping and entrance matting sectors.

WELCOME TO GENESIS....

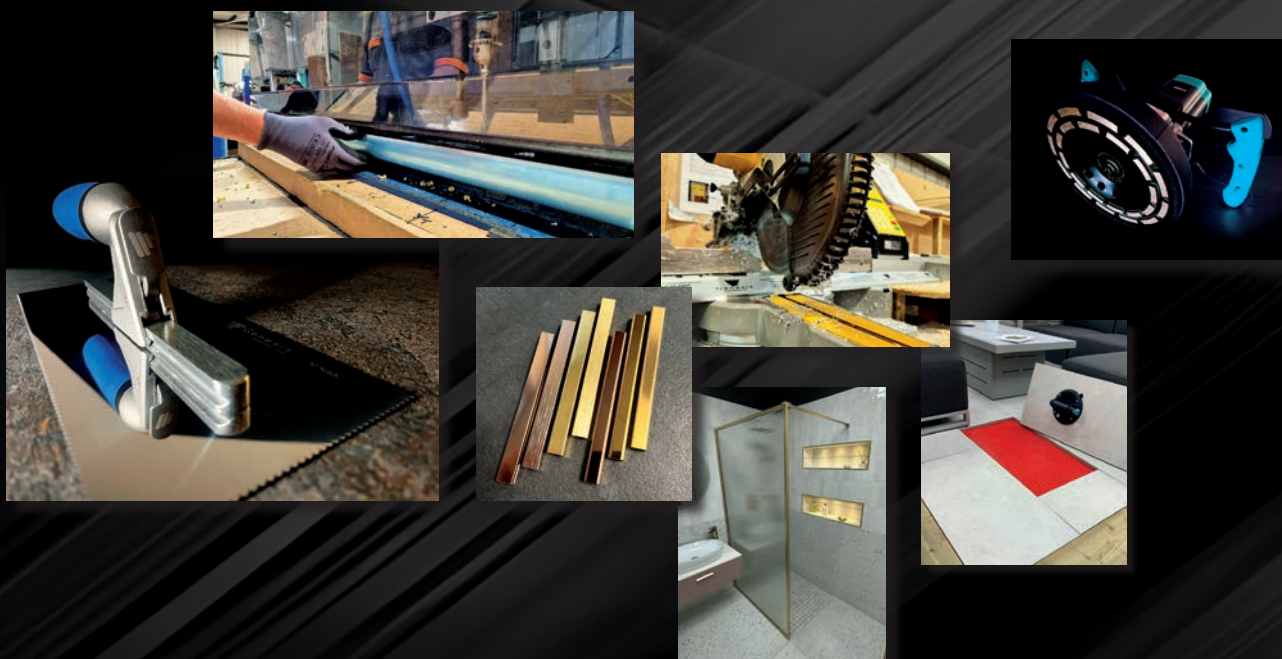

Iconography in this Catalogue

Our expansive range of wall and floor solutions can now be previewed at a glance with the inclusion of icons, designed to guide the readers attention to the core elements of the product, or range of products, some examples are as below.



Powder Coating

Where you see this icon the product can be powder coated to any classic RAL of your choice.

Charges and lead times apply (see page 244-247 for more details)



Corner Pieces

Where you see this icon the product has matching corner pieces available.



Need Support?

Feel free to contact our helpful team that offers no nonsense, clear and functional advice that helps achieve the perfect finish.

customer.service@genesis-gs.com


Tile Edging

Page 5



Outdoor, Balcony & Landscaping

Page 25



Movement & Expansion

Page 37



Kitchen & Bathroom

Page 45



Membranes & Systems

Page 59



Lighting

Page 85



Tools

Page 105




Commercial Nosings & Step Edges

Page 181



Floor Trims & Transitions

Page 207




Entrance Systems

Page 231




Wayfinding & Guidance

Page 239



Customisation

Page 243



Retail & Marketing


Page 249








Tile Edging



Genesis
The Perfect Finish


ESA Straight Edge & **EFA** Formable Trim


Actual Size



Code	D (mm)	L (m)	Finish	Qty
ESA030	2.25	2.7	80	20
ESA030	2.25	2.5	81	20
ESA040	3.25	2.7	80	20
ESA040	3.25	2.5	81	20
ESA050	4.25	2.7	80	20
ESA050	4.25	2.5	81	20
ESA060	6	2.7	80	20
ESA060	6	2.5	01,81,91	20
ESA080	8	2.7	80	20
ESA080	8	2.5	01,02,11,13,14,16,17,18,24,69,77,79,81,83,86,88,90,91,94,95	20
ESA080	8	2.5	401,411,414,420,425,435,462,463,489,490	20
ESA100	10	2.7	80	20
ESA107	10	2.7	81,91,94	20
ESA100	10	2.5	01,02,11,13,14,16,17,18,24,34,69,77,79,81,83,85,86,88,89,90,91,92,94,95,96	20
ESA100	10	2.5	401,411,414,420,425,435,462,463,489,490	20
ESA120	12	2.7	80	20
ESA127	12	2.7	81,91,94	20
ESA120	12	2.5	01,02,11,13,14,16,17,18,24,34,69,77,79,81,83,85,86,88,89,90,91,92,94,95,96	20
ESA120	12	2.5	401,411,414,420,425,435,462,463,489,490	20
ESA150	15	2.5	01,17,81,86,90,91,94	20
ESA180	18	2.5	81,91	20

Formable

Code	D (mm)	L (m)	Qty
EFA040.80	3.25	2.7	20
EFA050.80	4.25	2.7	20
EFA060.80	6	2.7	20
EFA080.80	8	2.7	20
EFA100.80	10	2.7	20
EFA120.80	12	2.7	20

Minimum radius achieved forming by hand




155mm




185mm

NEW 3-Way Design - ESC

Code	D (mm)	Finish	Pack
ESC082	8	01,13,14,16,17,18,69,77,79,81,86,90,91,94	2
ESC082	8	401,411,414,420,425,435,462,463,489	2
ESC102	10	01,13,14,16,17,18,34,69,77,79,81,86,90,91,94	2
ESC102	10	401,411,414,420,425,435,462,463,489	2
ESC122	12	01,13,14,16,17,18,34,69,77,79,81,86,90,91,94	2
ESC122	12	401,411,414,420,425,435,462,463,489	2

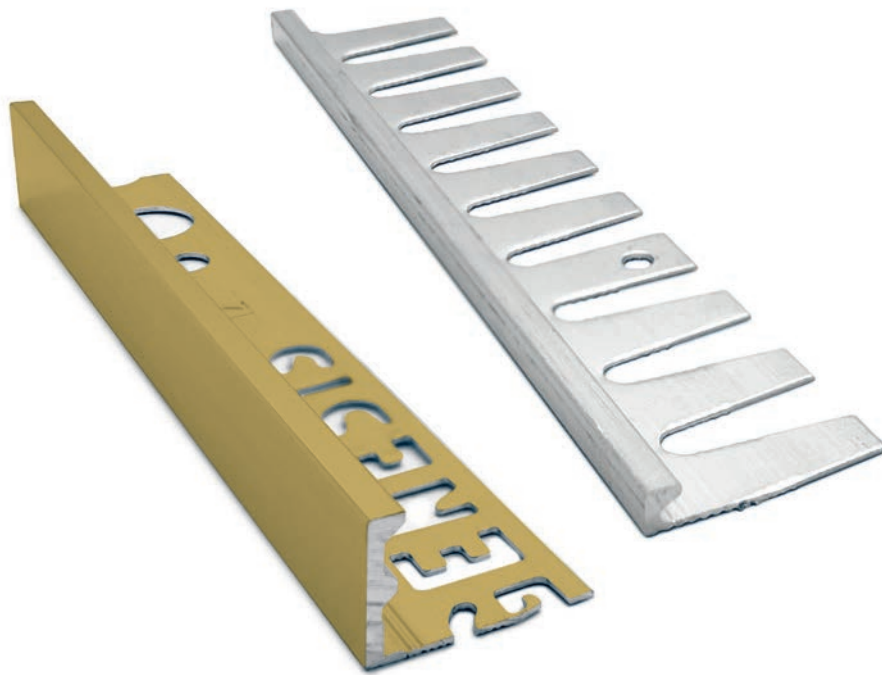

NEW DESIGN
3-WAY CORNERS

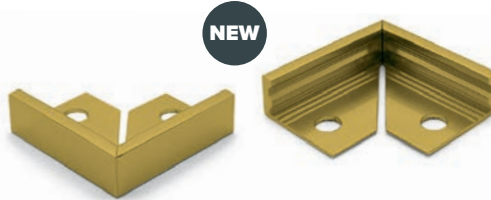

Aluminium



Straight



Classic

01

White

02

Matt White

11

Grey

16

Black

17

Matt Black

24

Sand

34

Soft Grey

Metallic

13

Champagne

14

Taupe

69

Oil Rubbed Bronze

80

Mill

81

Matt Silver

83

Matt Brass

85

Pewter

86

Bright Brass

89

Bronze

91

Bright Silver

92

Matt Nickel

95

Bright Copper

Brushed

18

Brushed Black

77

Gunmetal

79

Auburn

88

Nickel

90

Brushed Brass

94

Brushed Silver

96

Brushed Copper

Stone

401

Chalk Stone

411

Granite

414

Bath Stone

420

York Stone

425

Sand Stone

435

Dark Granite

462

Earth Stone

463

Urban Stone

489

Bronzite

490

Nordic Stone





EMA Medium Duty Trim

Actual Size



Code	D (mm)	Qty
EMA107.80	10	50
EMA127.80	12	50

Aluminium




Straight



2.7m







2.5mm



EPB Straight Edge Trim

Actual Size

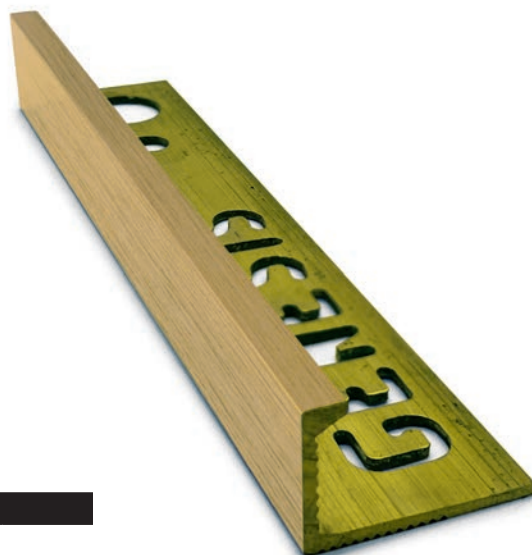

Code	D (mm)	Qty
EPB087.86	8	10
EPB087.87	8	10
EPB087.90	8	10
EPB087.V89	8	10
EPB107.86	10	10
EPB107.87	10	10
EPB107.90	10	10
EPB107.V89	10	10
EPB127.86	12	10
EPB127.87	12	10
EPB127.90	12	10
EPB127.V89	12	10

Solid Brass



Straight



2.7m



86

Polished

87

Natural


90

Brushed

V89





Antique

4mm



**ESS** Straight Edge & **ESF** Formable Trim

Actual Size

**Stainless Steel Grade 304 / V2A**

Code	D (mm)	Qty
ESS060.84	6	20
ESS060.102	6	20
ESS080.84	8	20
ESS080.102	8	20
ESS100.84	10	20
ESS100.102	10	20
ESS100.117	10	20
ESS100.187	10	20
ESS100.190	10	20
ESS100.195	10	20
ESS100.V90	10	20
ESS100.V96	10	20
ESS120.84	12	20
ESS120.102	12	20
ESS120.117	12	20
ESS120.187	12	20
ESS120.190	12	20
ESS120.195	12	20
ESS120.V90	12	20
ESS120.V96	12	20
ESS150.84	15	10
ESS150.102	15	10
ESS180.84	18	20
ESS180.102	18	20

Stainless Steel Grade 316 / V4A

Code	D (mm)	Qty
ESS310.84	10	20
ESS310.102	10	20
ESS312.84	12	20
ESS312.102	12	20

Formable Grade 304 / V2A

Code	D (mm)	Qty
ESF100.84	10	20
ESF100.102	10	20
ESF120.84	12	20
ESF120.102	12	20

Minimum radius achieved forming by hand



155mm



185mm

Stainless Steel



Straight



2.5m



84

Steel

102

Brushed

117

Matt
Black

187

Gold

190

Brushed
Gold


195

Copper

V90


Vintage
Brass

V96

Vintage
CopperOutdoor Tile Edge
Page 26Cutting Blade for
Stainless Steel
Page 17



ESP Straight Edge Trim

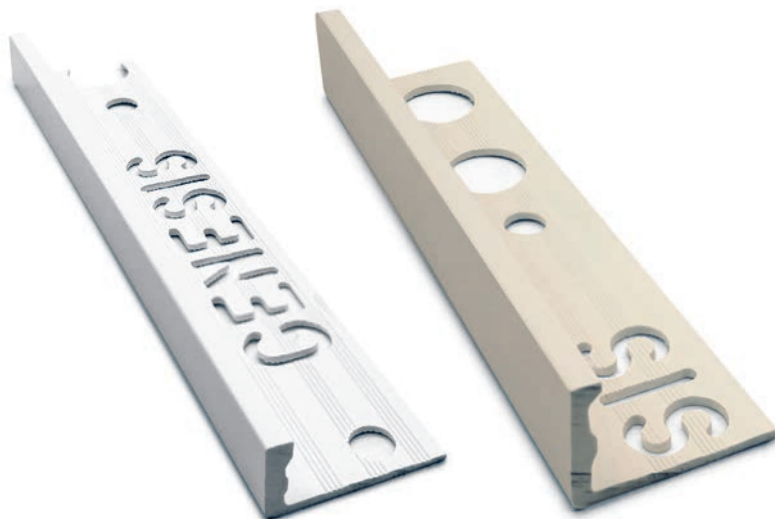

PVC



Straight



2.5m



01

White

11

Grey

16

Black




32

Soft
Cream

34


Soft
Grey

Actual Size



Code	D (mm)	Qty
ESP060.01	6	60
ESP080.01	8	60
ESP080.11	8	60
ESP080.16	8	60
ESP080.32	8	60
ESP080.34	8	60
ESP100.01	10	60
ESP100.11	10	60
ESP100.16	10	60
ESP100.32	10	60
ESP100.34	10	60
ESP120.01	12	60
ESP120.11	12	60
ESP120.16	12	60
ESP120.32	12	60
ESP120.34	12	60

3mm



TDG Contour Trim & Corners



Actual Size



Code	W x D (mm)	Qty
TDG084.91	8 x 8	20
TDG104.81	10 x 10	20
TDG104.91	10 x 10	20
TDG124.81	12 x 12	20
TDG124.91	12 x 12	20

Universal Corner Pieces - ECG

Code	D (mm)	Pack
ECG082.91	8	2
ECG102.81	10	2
ECG102.91	10	2
ECG122.81	12	2
ECG122.91	12	2

Aluminium



Square



2.5m




81

Matt Silver


91

Bright Silver





TDP Square Trim & Corners

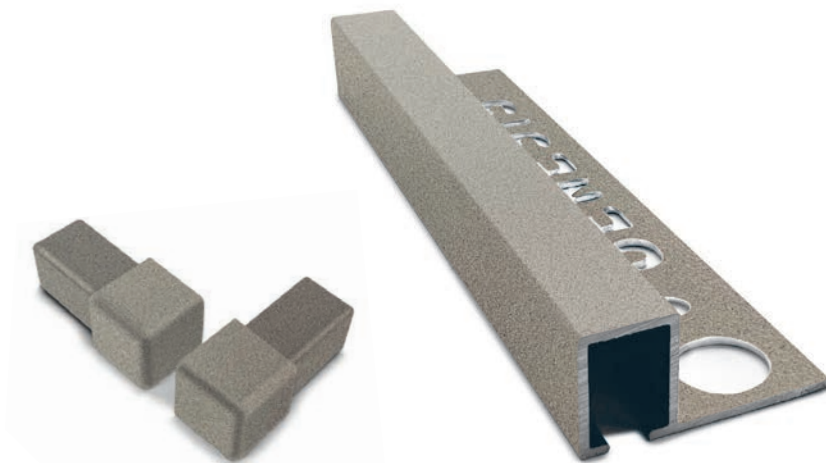

Actual Size



Code	D (mm)	Finish	Qty
TDP080	8	81,91,94	20
TDP100	10	01,02,16,17,18,81,86 90,91,91,95,96	20
TDP100	10	401 ,411,414,425,435	20
TDP120	12	01,02,16,17,18,81,86 90,91,91,95,96	20
TDP120	12	401 ,411,414,425,435	20

Universal Corner Pieces - EDP

Code	D (mm)	Finish	Pack
EDP082	8	81,91,94	2
EDP102	10	01,16,17,18,81, 86 ,90,91,94	2
EDP102	10	401 ,411,414,425,435	2
EDP122	12	01,16,17,18,81, 86 ,90,91,94	2
EDP122	12	401 ,411,414,425,435	2

Aluminium



Square



2.5m



Classic

01

White

02

Matt White

16

Black

17

Matt Black

Metallic

81

Matt Silver

86

Bright Brass

91

Bright Silver

95

Bright Copper

Brushed

18

Brushed Black

90

Brushed Brass

94

Brushed Silver

96

Brushed Copper

Stone

401

Chalk Stone

411

Granite

414


Bath Stone

425




Sand Stone

435

Dark Granite



Outdoor Tile Edge
Page 27

EQQ Square Edge

Actual Size

Stainless Steel Grade 304 / V2A

Code	W x D (mm)	Qty
EQQ080.84	8	20
EQQ080.102	8	20
EQQ100.84	10	20
EQQ100.102	10	20
EQQ100.117	10	20
EQQ100.187	10	20
EQQ100.190	10	20
EQQ100.195	10	20
EQQ100.V90	10	20
EQQ100.V96	10	20
EQQ120.84	12	20
EQQ120.102	12	20
EQQ120.117	12	20
EQQ120.187	12	20
EQQ120.190	12	20
EQQ120.195	12	20
EQQ120.V90	12	20
EQQ120.V96	12	20

Stainless Steel Grade 316 / V4A

Code	W x D (mm)	Qty
EQQ310.84	10	20
EQQ310.102	10	20
EQQ312.84	12	20
EQQ312.102	12	20

3 Way Corners Grade 304 / V2A - EDQ

Code	D (mm)	Pack
EDQ082.84	8	2
EDQ082.102	8	2
EDQ102.84	10	2
EDQ102.102	10	2
EDQ102.117	10	2
EDQ102.187	10	2
EDQ102.190	10	2
EDQ102.195	10	2
EDQ122.84	12	2
EDQ122.102	12	2
EDQ122.117	12	2
EDQ122.187	12	2
EDQ122.190	12	2
EDQ122.195	12	2

Stainless Steel



Square



2.5m



84

Steel

102

Brushed

117

Matt
Black

187

Gold

190

Brushed
Gold


195

Copper

V90

Vintage
Brass

V96


Vintage
Copper

Cutting Blade for
Stainless Steel
Page 17




TDB Square



Actual Size



Code	D (mm)	Qty
TDB107.87	10	10
TDB107.90	10	10
TDB107.V89	10	10
TDB127.87	12	10
TDB127.90	12	10
TDB127.V89	12	10

Solid Brass



Square



2.7m



87


Natural

90

Brushed

V89




Antique



ETA Pro Trim & Corners



Actual Size



Code	W x D (mm)	Qty
ETA060.81	6	20
ETA060.91	6	20
ETA080.81	8	20
ETA080.91	8	20
ETA080.94	8	20
ETA100.81	10	20
ETA100.91	10	20
ETA100.94	10	20
ETA120.81	12	20
ETA120.91	12	20
ETA120.94	12	20

Universal Corner Pieces - ETC

Code	D (mm)	Pack
ETC062.81	6	2
ETC062.91	6	2

Also compatible with EAC / EIQ overleaf

Aluminium



Round



2.5m



81


Matt
Silver

91

Bright
Silver

94

Brushed
Silver






EAQ Quadrant Trim & Corners



Actual Size



Code	W x D (mm)	Qty
EAQ080.01	8	20
EAQ080.81	8	20
EAQ080.91	8	20
EAQ100.01	10	20
EAQ100.16	10	20
EAQ100.17	10	20
EAQ100.81	10	20
EAQ100.86	10	20
EAQ100.91	10	20
EAQ100.94	10	20
EAQ120.01	12	20
EAQ120.16	12	20
EAQ120.17	12	20
EAQ120.81	12	20
EAQ120.86	12	20
EAQ120.91	12	20
EAQ120.94	12	20

Internal Corners - EIQ

Code	D (mm)	Pack
EIQ082.81	8	2
EIQ082.91	8	2
EIQ102.81	10	2
EIQ102.86	10	2
EIQ102.91	10	2
EIQ102.94	10	2
EIQ122.81	12	2
EIQ122.91	12	2
EIQ122.94	12	2

External Corners - EAC

Code	D (mm)	Pack
EAC082.01	8	2
EAC082.81	8	2
EAC082.91	8	2
EAC102.01	10	2
EAC102.16	10	2
EAC102.81	10	2
EAC102.86	10	2
EAC102.91	10	2
EAC102.94	10	2
EAC122.01	12	2
EAC122.16	12	2
EAC122.81	12	2
EAC122.91	12	2
EAC122.94	12	2

Aluminium



Round



2.5m



01

White

16

Black

17

Matt Black

81

Matt Silver

86


Bright Brass

91




Bright Silver

94

Brushed Silver



ESQ Quadrant

Actual Size

Stainless Steel Grade 304 / V2A

Code	W x D (mm)	Qty
ESQ080.84	8	20
ESQ080.102	8	20
ESQ100.84	10	20
ESQ100.102	10	20
ESQ120.84	12	20
ESQ120.102	12	20

Stainless Steel Grade 316 / V4A

Code	W x D (mm)	Qty
ESQ310.84	10	20
ESQ310.102	10	20
ESQ312.84	12	20
ESQ312.102	12	20

3 Way Corners Grade 304 / V2A - ECQ

Code	D (mm)	Pack
ECQ082.84	8	2
ECQ082.102	8	2
ECQ102.84	10	2
ECQ102.102	10	2
ECQ122.84	12	2
ECQ122.102	12	2

Stainless Steel



Round



2.5m




84

Steel

102

Brushed


Cutting Blade for Stainless Steel

Wear resistant bond system.

Code	Qty
B550115	20



115mm



1mm



13,300 RPM



22.2mm





ETR Trim Regular & Corners



Code	D (mm)	W (mm)	Qty
ETR608.01	6	21	60
ETR608.16	6	21	60
ETR608.32	6	21	60
ETR608.34	6	21	60
ETR708.01	7	22	60
ETR808.01	8	25	60
ETR808.11	8	25	60
ETR808.16	8	25	60
ETR808.32	8	25	60
ETR808.34	8	25	60
ETR808.64	8	25	60
ETR808.72	8	25	60
ETR108.01	10	26	60
ETR108.11	10	26	60
ETR108.16	10	26	60
ETR108.32	10	26	60
ETR108.34	10	26	60
ETR108.64	10	26	60
ETR108.70	10	26	60
ETR128.01	12	32	60
ETR128.11	12	32	60
ETR128.32	12	32	60
ETR128.64	12	32	60

3 Way Corner Pieces - PD

Code	D (mm)	Finish	Pack
PDM603	6	01,16,32,34	100
PDP604	6	01,16,34	4 Blister Pack
PDL803	8	01,11,16,32,34	100
PDP804	8	01,16,34	4 Blister Pack
PDX103	10	01,11,16,32,34	100
PDP104	10	01,16,34	4 Blister Pack
PDX123	12	01,11,32	100
PDP124	12	01	4 Blister Pack

PVC



Round



2.5m



Plain

01

White

11

Grey

16

Black

32

Soft Cream

34

Soft Grey

Marble Effect

64


White Marble



70

Toffee Swirl

72

Roman Marble



**EAD** Angle Trim

Code	D (mm)	Qty
EAD100.91	10	20
EAD120.91	12	20


Aluminium



Angle



2.5m

**ETS** Angle Edge

Code	D (mm)	Qty
ETS100.84	10	20


Stainless Steel



Angle




2.5m

Cutting Blade for
Stainless Steel
Page 17



LFA Flat Line Listello



Code	D (mm)	Qty
LFA100.86	10	20
LFA100.91	10	20
LFA100.94	10	20
LFA200.17	20	20
LFA200.90	20	20
LFA200.91	20	20
LFA200.94	20	20

Aluminium



Listello



2.5m



17

Matt Black

86

Bright Brass

90


Brushed Brass

91


Bright Silver

94

Brushed Silver



EWA Internal Trim, Corners & Caps

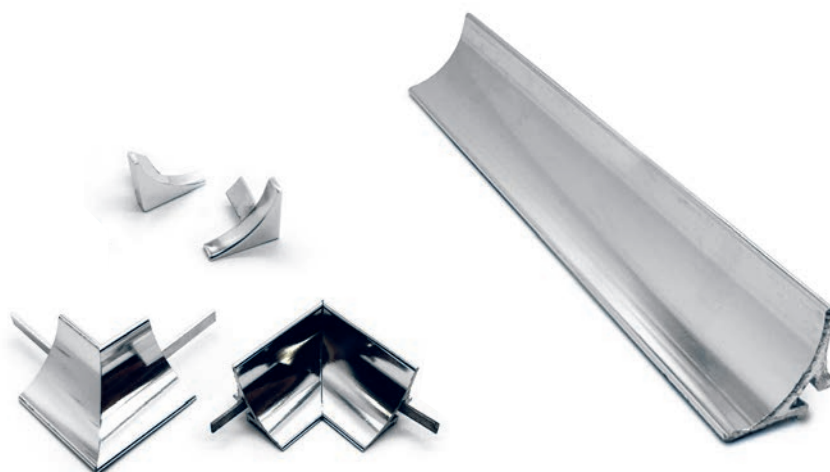

Code	D (mm)	Qty
EWA150.81	11.5	20
EWA150.91	11.5	20

External Corners - EWE

Code	D (mm)	Pack
EWE150.81	11.5	2
EWE150.91	11.5	2

Internal Corners - EWI

Code	D (mm)	Pack
EWI150.81	11.5	2
EWI150.91	11.5	2

End Caps - EWC

Code	D (mm)	Pack
EWC150.81	11.5	2
EWC150.91	11.5	2

Aluminium



Internal



2.5m



Self-Adhesive




81

Matt Silver

91


Bright Silver



Corner Guards



Genesis
The Perfect Finish

**EEA** Corner Guard

Code	W x D (mm)	Qty
EEA100.81	10 x 10	20
EEA100.91	10 x 10	20

Aluminium



Corner



2.5m



Self-Adhesive




81

Matt Silver

91

Bright Silver

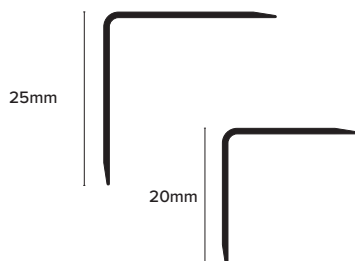EEA Corner Guard

Aluminium



Corner



2.6m



✓



16

Black

17

Matt Black

81

Matt Silver

86

Bright Brass

91

Bright Silver

94

Brushed Silver

Stone

NEW

401

Chalk Stone

411

Granite


414

Bath Stone

425

Sand Stone

Code	W x D (mm)	Qty
EEA206.16	20 x 20	20
EEA206.17	20 x 20	20
EEA206.81	20 x 20	20
EEA206.86	20 x 20	20
EEA206.90	20 x 20	20
EEA206.91	20 x 20	20
EEA206.94	20 x 20	20
EEA206.401	20 x 20	20
EEA206.411	20 x 20	20
EEA206.414	20 x 20	20
EEA206.425	20 x 20	20
EEA254.81	25 x 25	20



**EAP** Rounded Corner Guard

Code	W x D (mm)	Qty
EAP205.16	20 x 20	20
EAP205.91	20 x 20	20

Aluminium



Corner



1.5m






16

Black

91

Bright Silver

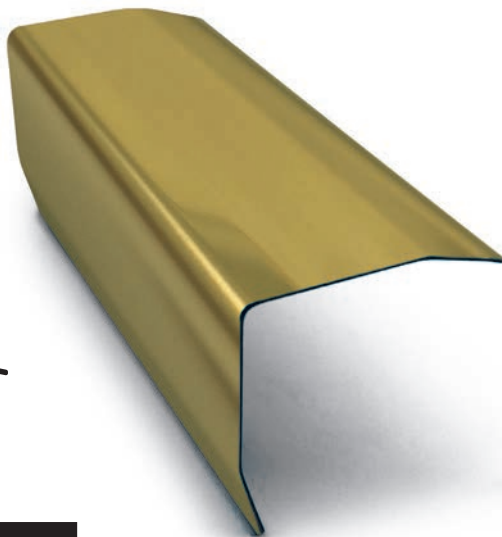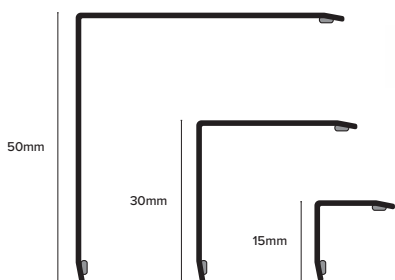**EAS** Corner Guard

Code	W x D (mm)	Qty
EAS154.84	15 x 15	20
EAS154.102	15 x 15	20
EAS154.117	15 x 15	20
EAS154.187	15 x 15	20
EAS154.195	15 x 15	20
EAS304.84	30 x 30	20
EAS304.102	30 x 30	20
EAS304.117	30 x 30	20
EAS304.187	30 x 30	20
EAS304.195	30 x 30	20
EAS504.84	50 x 50	10
EAS504.102	50 x 50	10
EAS515.84*	50 x 50	10



**Cutting Blade for
Stainless Steel
Page 17**

Stainless Steel



Corner



2.5m / 1.5m*



Self-Adhesive



84

Steel

102

Brushed

117


Matt Black

187

Gold

195

Copper





External Landscaping, Bath

Project Specifications

Products Specified: **NLT225**

Insert Colours: **425 Sandstone**

Sector: Residential

Project Description

With a cracking and tired looking porcelain patio! Somerset Precision Tiling was tasked to install a refreshed internal and external floor.

The plan was to install the kitchen and external patio with 22mm thick tumbled edge sandstone, creating a seamless entry from kitchen to al fresco dining in the summertime.

With the old tiles removed, the slab was replaced with a sand and cement screed.

Levelling and anti-fracture prep done, the steps needed a fall to allow rainwater to run off (away from the house)

One of the major things to consider was the step edging, it needed to look good and provide some form of slip resistance.

Our NLT profile is a simple but well designed, innovative profile that provides a safe and secure edge, it has a flange that sits underneath the floor covering with a grooved profile face for extra grip.

What's even better is the profile finish – In Sandstone this profile not only offered a solution it also looked amazing too!

Thanks to Tom Hogan from Somerset Precision Tiling for sharing this project with us.


Project Address – Residential Home in Charlcombe, Bath.



Outdoor, Balcony & Landscaping



Genesis
The Perfect Finish

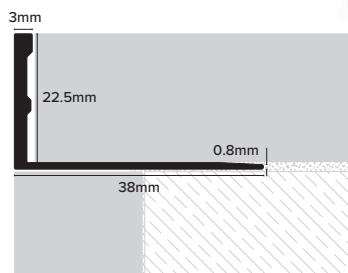**ESA** Straight Edge

Code	Qty
ESA225.80*	20
ESA225.81 NEW	20
ESA225.17	20
ESA225.91	20
ESA225.94	20
ESA225.411	20
ESA225.414	20
ESA225.425	20
ESA225.435	20

Aluminium



Straight



2.5m / 2.7m*



17

Matt
Black

80

Mill

81

Matt
Silver NEW

91

Bright
Silver

94

Brushed
Silver

411

Granite


414

Bath
Stone

425

Sand
Stone

435

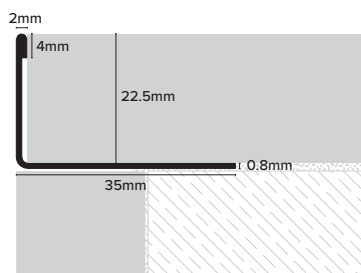Dark
Granite**ESS** Straight Edge

Code	Qty
ESS225.84	20
ESS225.102	20

Stainless Steel



Straight



2.5m




84

Steel

102

Brushed

Cutting Blade for
Stainless Steel
Page 17

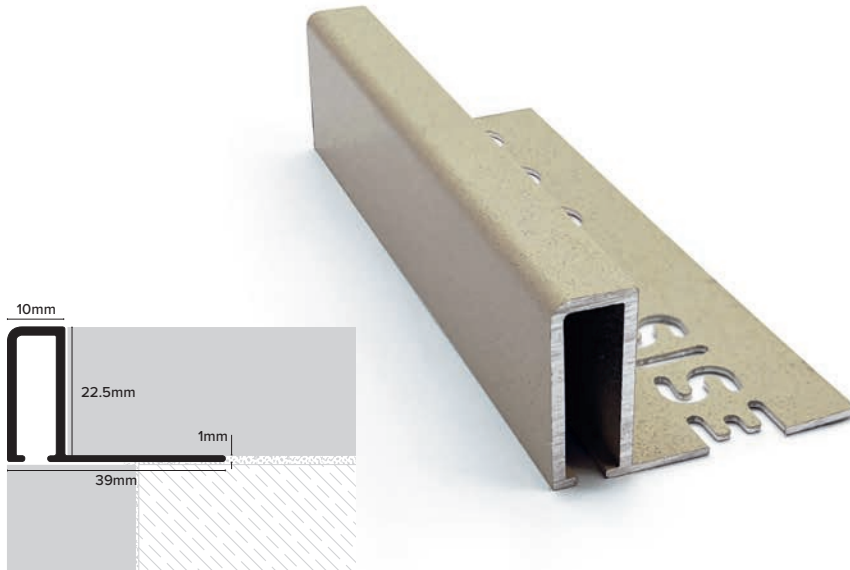**TDP Aluminium Square**

Code	Qty
TDP225.17	20
TDP225.81	20
TDP225.411	20
TDP225.414	20
TDP225.425	20
TDP225.435	20

Aluminium



Square



2.5m



17

Matt Black

81

Matt Silver



Granite




Bath Stone



Sand Stone



Dark Granite

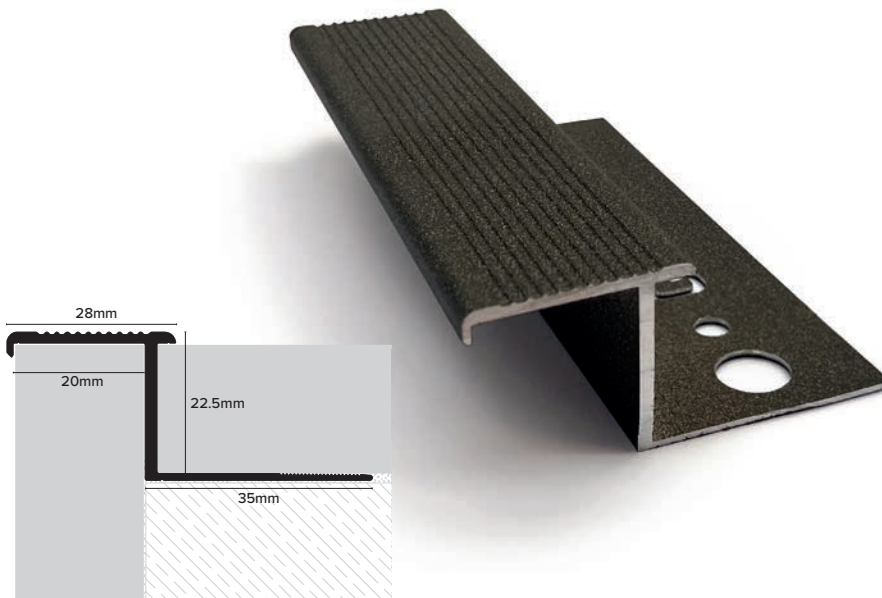NLT Tile-In Step Edge

Code	Qty
NLT225.17	10
NLT225.81	10
NLT225.411	10
NLT225.414	10
NLT225.425	10
NLT225.435	10

Aluminium



Step Edge



2.5m



17

Matt Black

81

Matt Silver



Granite



Bath Stone



Sand Stone





Dark Granite





ETS Capping Strip

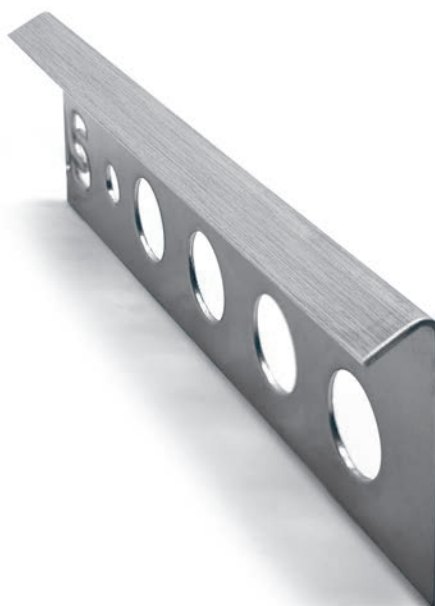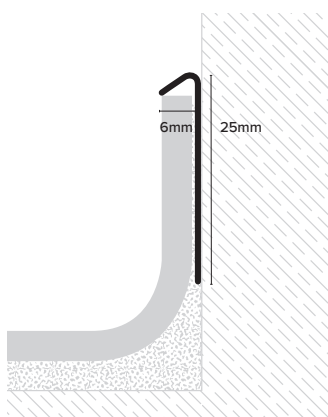

Code	Qty
ETS060.102	20

Stainless Steel



Capping



2.5m






Industrial Flooring



Cutting Blade for
Stainless Steel
Page 17



ESA Straight Edge & EFA Formable Trim

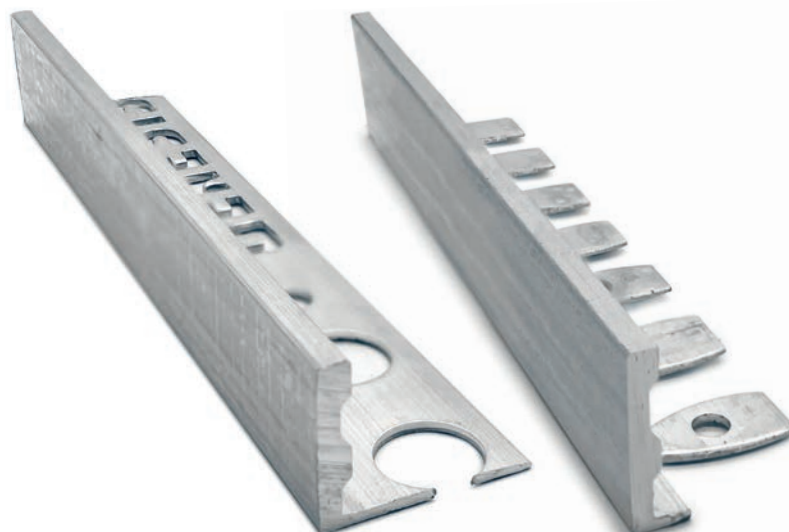

Code	D (mm)	Qty
ESA150.80	15	20
ESA180.80	18	20

Formable

Code	D (mm)	Qty
EFA150.80	15	20
EFA180.80	18	20

Minimum radius achieved forming by hand



155mm



185mm

Aluminium




Straight





2.7m



Resinbound Flooring



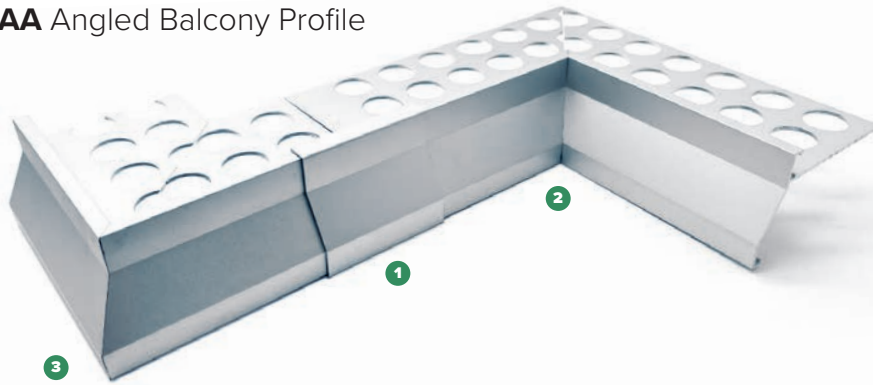**BAA Angled Balcony Profile****Profile**

Code	H x D (mm)	Qty
BAA100.17	42 x 10	10
BAA100.81	42 x 10	10
BAA100.82	42 x 10	10
BAA120.17	44 x 12	10
BAA120.81	44 x 12	10
BAA120.82	44 x 12	10

1 Connectors

Code	D (mm)	Qty
BACA10.17	10	1
BACA10.81	10	1
BACA10.82	10	1
BACA12.17	12	1
BACA12.81	12	1
BACA12.82	12	1

2 Internal Corners

Code	D (mm)	Qty
BAIA10.17	10	1
BAIA10.81	10	1
BAIA10.82	10	1
BAIA12.17	12	1
BAIA12.81	12	1
BAIA12.82	12	1

3 External Corners

Code	D (mm)	Qty
BAEA10.17	10	1
BAEA10.81	10	1
BAEA10.82	10	1
BAEA12.17	12	1
BAEA12.81	12	1
BAEA12.82	12	1

Aluminium



2.5m



17



Matt Black

81

Matt Silver

82

Anthracite

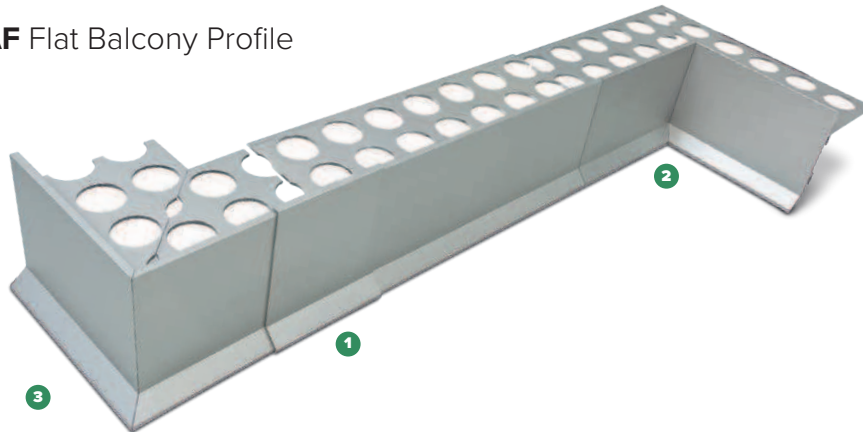BAF Flat Balcony Profile**Profile**

Code	H x D (mm)	Qty
BAF100.17	53 x 10	10
BAF100.81	53 x 10	10
BAF100.82	53 x 10	10
BAF120.17	55 x 12	10
BAF120.81	55 x 12	10
BAF120.82	55 x 12	10

1 Connectors

Code	D (mm)	Qty
BACF10.17	10	1
BACF10.81	10	1
BACF10.82	10	1
BACF12.17	12	1
BACF12.81	12	1
BACF12.82	12	1

2 Internal Corners

Code	D (mm)	Qty
BAIF10.17	10	1
BAIF10.81	10	1
BAIF10.82	10	1
BAIF12.17	12	1
BAIF12.81	12	1
BAIF12.82	12	1

3 External Corners

Code	D (mm)	Qty
BAEF10.17	10	1
BAEF10.81	10	1
BAEF10.82	10	1
BAEF12.17	12	1
BAEF12.81	12	1
BAEF12.82	12	1

Aluminium



2.5m



17

Matt Black

81

Matt Silver


82

Anthracite



Proterrace Double Drip

Edging profile designed to protect the edges of the tiles on balconies and terraces and allows the downflow of water. The flange includes a foam shielding layer which protects the outflow holes from being filled with silicone. The unique double drip allows the drainage water to flow easily.

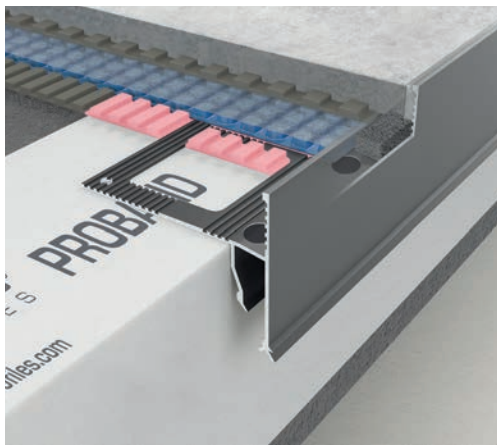

Profile

Code	D x H (mm)	Qty
PDD 10AL A	10 x 60	5
PDD 10AL BF	10 x 60	5
PDD 10AL GF	10 x 60	5
PDD 10AL TF	10 x 60	5
PDD 125AL A	12.5 x 62.5	5
PDD 125AL BF	12.5 x 62.5	5
PDD 125AL GF	12.5 x 62.5	5
PDD 125AL TF	12.5 x 62.5	5
PDD 175AL A	17.5 x 67.5	5
PDD 175AL BF	17.5 x 67.5	5
PDD 175AL TF	17.5 x 67.5	5
PDD 175AL GF	17.5 x 67.5	5
PDD 205AL A	20.5 x 70.5	5
PDD 205AL BF	20.5 x 70.5	5
PDD 205AL TF	20.5 x 70.5	5
PDD 205AL GF	20.5 x 70.5	5
PDD 225AL A	22.5 x 72.5	5
PDD 225AL BF	22.5 x 72.5	5
PDD 225AL TF	22.5 x 72.5	5
PDD 225AL GF	22.5 x 72.5	5
PDD 30AL A	30 x 80	5
PDD 30AL BF	30 x 80	5
PDD 30AL GF	30 x 80	5
PDD 30AL TF	30 x 80	5

Joints

Code	D (mm)	Finish	Qty
GINPDD 10AL	10	A,BF,GF,TF	10
GINPDD 125AL	12.5	A,BF,GF,TF	10
GINPDD 175AL	17.5	A,BF,GF,TF	10
GINPDD 205AL	20.5	A,BF,GF,TF	10
GINPDD 225AL	22.5	A,BF,GF,TF	10
GINPDD 30AL	30	A,BF,GF,TF	10

Internal Corners

Code	D (mm)	Finish	Qty
AIPDD 10AL/10	10	A,BF,GF,TF	10
AIPDD 125AL/10	12.5	A,BF,GF,TF	10
AIPDD 175AL/10	17.5	A,BF,GF,TF	10
AIPDD 205AL/10	20.5	A,BF,GF,TF	10
AIPDD 225AL/10	22.5	A,BF,GF,TF	10
AIPDD 30AL/10	30	A,BF,GF,TF	10

Internal Junction

Code	D (mm)	Finish	Qty
AICPDD 10AL	10	A,BF,GF,TF	10
AICPDD 125AL	12.5	A,BF,GF,TF	10
AICPDD 205AL	20.5	BF,GF	10

External Junction

Code	D (mm)	Finish	Qty
AECPDD 10AL	10	A,BF,GF,TF	10
AECPDD 125AL	12.5	A,BF,GF,TF	10
AECPDD 205AL	20.5	BF,GF	10

End Caps

Code	Finish	Pack
TPDDAL/2	A,BF,GF,TF	2


Aluminium



Balcony



2.7m

Anthracite
N / AWhite
RAL 9010Grey
RAL 7038Brown
RAL 8019



Channel Drains


A polypropylene(PP) channel with Tile-In, Galvanized Steel or PP grate top options, available in 1 metre lengths with a design that clicks together to extend to the desired length, and side connectors available for an Easy Connect.

Load class of A15 (maximum load rating of 1.5 tonnes) in accordance with UNI EN 1433.

Accompanied by end caps and a screw fitted adapter, system enables drainage suitable for driveways, patios and gardens.


Galvanised Steel Grating

Code	D (mm)	Qty
MCGS1250.84 NEW	50	1
MCGS1284.84	84	1

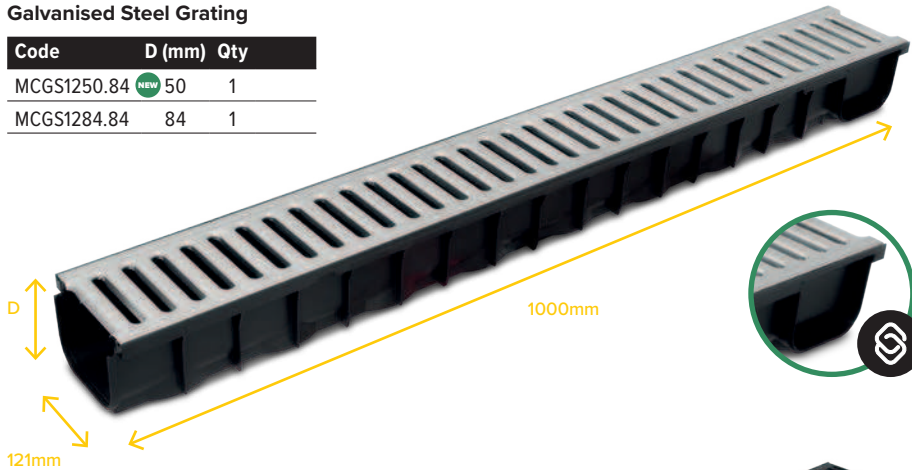

PP Grating

Code	D (mm)	Qty
MCPP1284.16	84	1

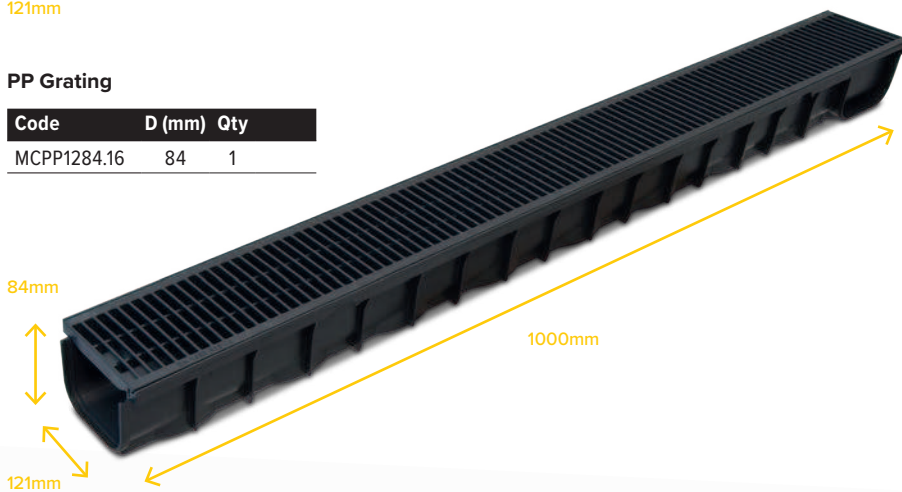

Tile-in Slot Drain PP NEW

Code	D (mm)	Qty
MSTI1250.16	50	1



MCAD



ø 110 mm

MCEC



Accessories

Code	Description	Qty
MCEC	End Caps for 84mm Midi Channel - 2pcs	200
MIEC NEW	End Caps for 50mm Midi Channel - 2pcs	100
MCAD	Adapter for 84mm Midi Channel - incl. 4 screws	200
MIAD NEW	Adapter for 50mm Midi Channel - incl. 4 screws	100

Drain



Easy Connect



1m






Qty: 140



16

Black
PP

84

Galvanized
Steel

*Galvanized steel grate only





Linea Drains

NEW

Introducing the all-new 21mm Drain range, designed for performance, precision, and style.

Available in two sleek options, grate top or tile-in, these drains feature an improved water flow system and a purpose-designed edge that maintains a consistent gap around the entire top, including the ends, delivering a flawless, professional finish.


Crafted from durable anodised aluminium, the range is Watermark Certified, UV stable, and fully customisable on-site, making it ideal for outdoor spaces.

Each drainage profile is supplied in 2-metre lengths and comes with universal end caps that are compatible with both designs. For added installation flexibility, the system also includes a 45mm drainage outlet, as well as straight and angled connectors — ensuring quick, easy, and adaptable installation in any layout.

With an impressive flow rate of 35 litres per minute, these drains outperform standard residential systems..

Now available in Brushed Black and a selection of Stone finishes to complement or contrast your design, this is the smarter solution for modern, refined drainage.

Each drainage profile is supplied in 2-metre lengths and comes with universal end caps that are compatible with both designs. The profile is simple to cut, easy to connect, using the straight and angled connectors available, and is designed to allow for the ultimate installation flexibility with a 45mm drainage outlet which allows for the drainage point to be placed wherever you require — ensuring quick, easy, and adaptable installation in any layout.

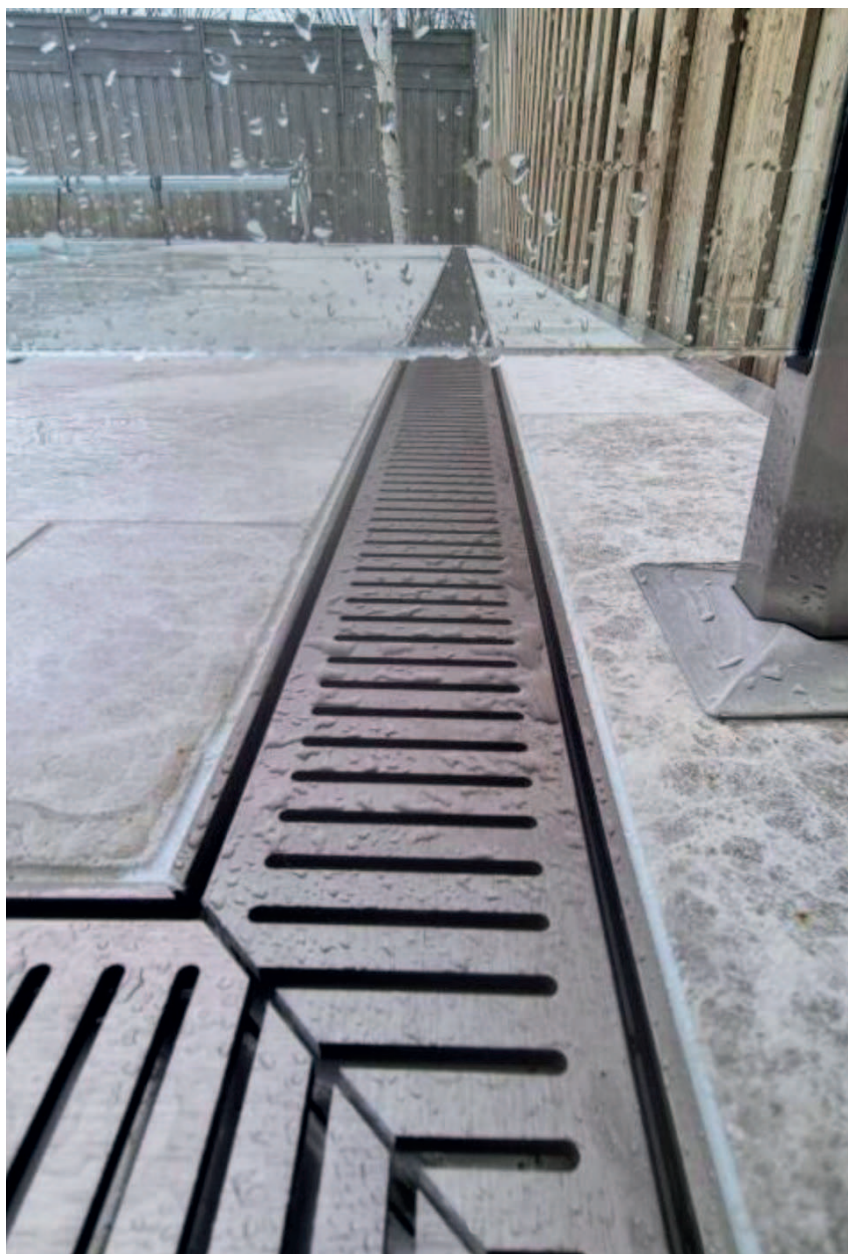

**NEW****Tile-In**

Code	Qty
MAT1212.18	4
MAT1212.401	4
MAT1212.425	4
MAT1212.435	4

**Grate**




Code	Qty
MASL212.18	4
MASL212.401	4
MASL212.425	4
MASL212.435	4

**Universal End Caps**

Code	Qty
MAC212.18	10
MAC212.401	10
MAC212.425	10
MAC212.435	10

**Accessories**

Code		Qty
MA045	45mm Outlet	10
MASJ212	Connector x 2	10
MAAJ212	90° Angle Connector x 2	10

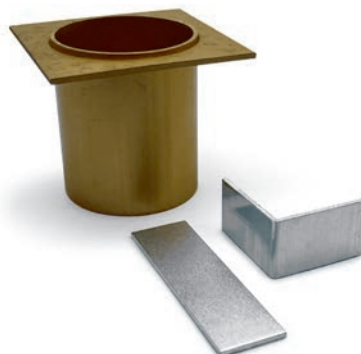**Aluminium****Internal /
External****2m****18**Brushed
Black**401**Chalk
Stone**425**Sand
Stone**435**Dark
Granite



Atlas Pedestal System

The Atlas Pedestal System offers adjustable-height supports for outdoor raised floors, creating paved terraces with high mechanical strength and easy, grout-free installation. Its base allows for drainage, whilst the fixed head includes four removable 4 mm tabs for quick alignment of large-format tiles or slabs, supporting loads up to 1000 kg.

Pedestals range from 18 mm to 220 mm, and with up to three 100 mm extensions, heights of up to 0.5 m can be achieved. If assistance is required with the installation, we can help calculate material requirements based on tile size and project area.

The new safety grid system ensures a strong, stable, and level sub-structure with no lippage. Made from reinforced polypropylene, the grids interlock using a Locking Joint (GPLJ50) for exceptional stability. Once the grids are secured, the final surface layer can be applied.

Polypropylene



Pedestals



1000



< 0.5m





ATLAS
PEDESTALS



Installation Advice

The surface for pedestals must be solid, such as cement or asphalt, turf/grass is not a suitable base for laying pedestals.

Pedestal Placement Examples



Opus Bond (Safety Grid)

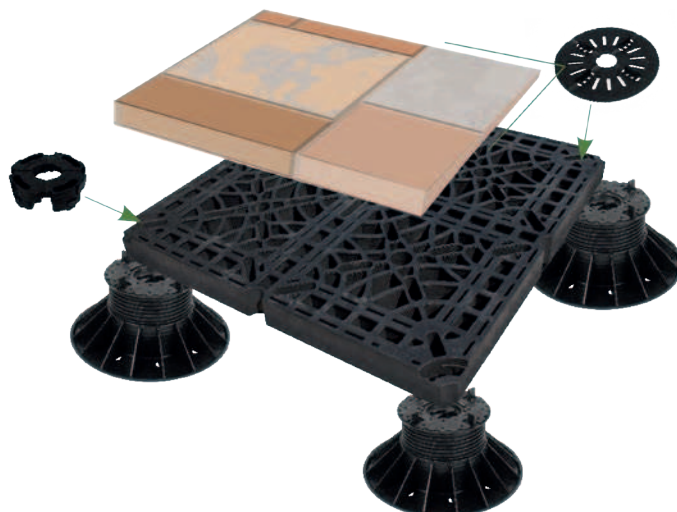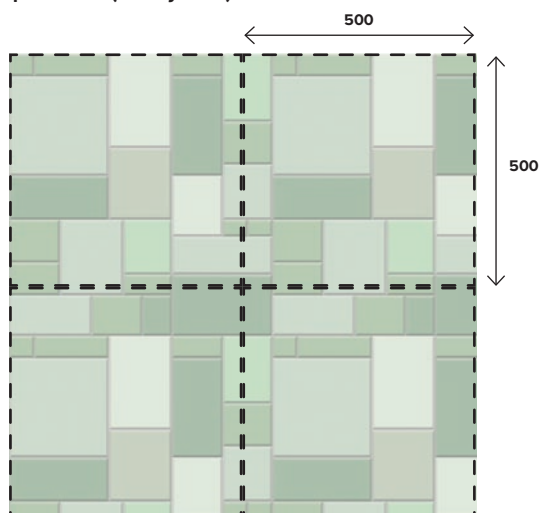

**Pedestals**

Code	Description	Qty
GP1836*	18-36mm	30
GP3560	35-60mm	30
GP60115	60-115mm	30
GP115220	115-220mm	15



GP1836



GP3560



GP60115



GP115220

Extension

Code	Description	Qty
GP9EX*	9mm Extension	30
GP25EX	Fixed 25mm	30
GP50EX	Fixed 50mm Extension	30
GP100EX	Fixed 100mm Extension	30



GP9EX



GP25EX



GP50EX




GP100EX

*Each GP1836 comes with 1 x GP9EX

Safety Grid

Code	Description	Qty
GPSD50	Safety Grid - 500 x 500	27
GPLJ50	Locking Joint for system - 25.2	100

GPSD50

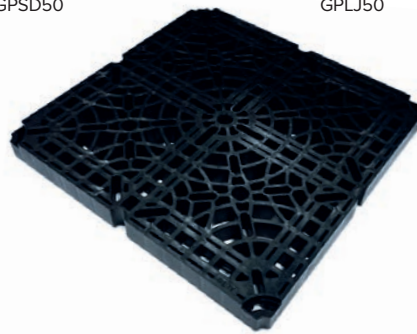

GPLJ50

**Accessories**


Code	Description	Qty
GPSLH	Self Levelling Head	15
GPMAT	3mm Rubber Anti-Noise Mat	80
GPEDG	Perimeter Edge Plate & Clips	1
GPLR2	Laying rubber 2mm Ø 130mm	100
GPLR3	Laying rubber 3mm Ø 130mm	100
GPLR4	Laying rubber 4mm Ø 130mm	1



GPLR (2, 3 or 4mm)



GPSLH





GPEDG



GPMAT



Atlas Pedestal Perimeter Profiles

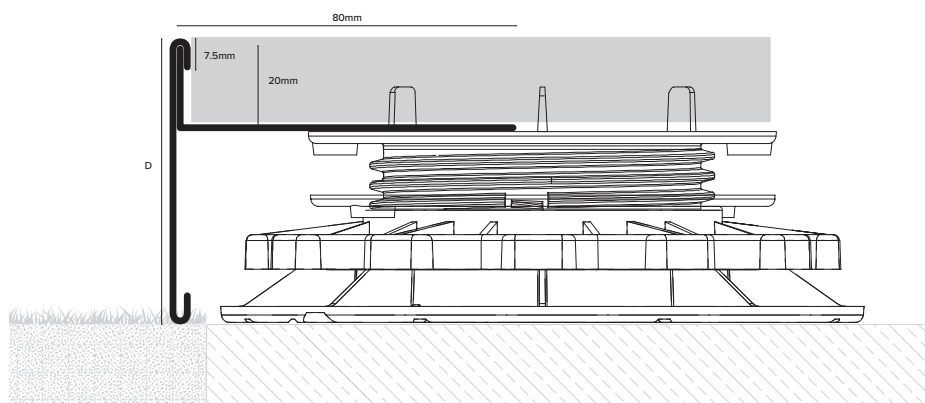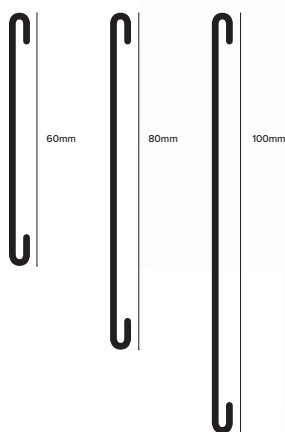

A range of aluminium profiles designed to finish and protect outdoor terraces, patios, balconies or raised floors.

Accompanied by connectors and external corners and available in three different heights to accommodate a range of pedestals. Our punched base and visible side plate offer a simple yet neat, aesthetically pleasing solution for your platform.

Base

Code	Qty
BAL200.80	10

Side Plate

Code	Size (mm)	Qty
BAP600.81	60	10
BAP600.82	60	10
BAP800.81	80	10
BAP800.82	80	10
BAP100.81	100	10
BAP100.82	100	10

External Corners

Code	Size (mm)	Qty
BEC600.81	60	10
BEC600.82	60	10
BEC800.81	80	10
BEC800.82	80	10
BEC100.81	100	10
BEC100.82	100	10

Connectors

Code	Size (mm)	Qty
BCT600.81	60	10
BCT600.82	60	10
BCT800.81	80	10
BCT800.82	80	10
BCT100.81	100	10
BCT100.82	100	10

Aluminium



Pedestals



2.5m



Tile



ATLAS
PEDESTALS

81

Matt Silver

82

Anthracite

Movement & Expansion

MOVEMENT
& EXPANSION



Genesis
The Perfect Finish



1. **Material Selection** - the material used to form the joint anchoring legs has no bearing on the movement capacity. Different materials provide added protection to the edge of the floor covering depending on the type and volume of traffic;

PVC - Light duty traffic, foot traffic only, sight line is a consistent colour making it ideal for domestic applications in large rooms or doorways, removable leg for use as a perimeter in rooms greater than 4sqm, waterproof and suitable for swimming pool surrounds and wet areas.

Aluminium - Grade 6063 Aluminium provides extra protection to the floor covering and can be used in heavy traffic areas with foot and low point loading wheel traffic, ideal for use in car showrooms and shopping centres.

Stainless Steel - Available in Grade 304 and 316, this is the strongest of the materials giving the ultimate protection to the floor covering and ideal for all traffic, popular with airports and supermarkets where the wheel traffic has a high point loading and can cause the most impact damage. Grade 316 is recommended in swimming pool surrounds, food prep areas, hospitals and wet areas due to its increased corrosive resistance and strength.

2. **Performance** – the movement accommodation is determined by the width of the joint infill. All Genesis movement joints conform to the BS5385 requirement that they provide +/- 10% movement capacity.

3. **Positioning** – the following points must be considered when choosing your movement joint.

In all applications a intermediate movement joint must be used DIRECTLY above a joint in the sub-floor, whether this is the same type of subfloor or not. This is often missed domestically on extensions where a new subfloor will be constructed. In commercial applications where there is a structural gap in the subfloor the movement joint must not overhang the gap, if the structural joint is 10mm and the infill of the movement joint must be 10mm or greater.

When tiling continues from room to room it is good practice to use a movement joint in the doorways, this is essential if the walls are load bearing.

If there are no joints in the subfloor, position joints from the perimeter, if there are joints in the subfloor, start from the location of the joint. Positioning should then be 8m apart in any direction when using UFH or thermal movement is expected and 10m when UFH is not present and all installation should be in square/rectangular bays.

A room 4sqm or larger with load bearing walls should have a perimeter joint in place.

Once a room/project exceeds 20sqm or extends into a second room you should be considering the need for a movement joint!



**MLB P.V.C.
Movement Joint**



**MSA Optimax
Aluminium HD**




**MSS Optimax
Stainless Steel HD**

4m² = Perimeter Joint 20m² = Intermediate Joint



MMA Intermediate Joint



Code	D (mm)	Qty
MMA100.16	10	10
MMA100.35	10	10
MMA120.16	12.5	10
MMA120.35	12.5	10

Aluminium



Tile-In



2.5m




16

Black

35

Traffic Grey



MLB & MLT Movement & Perimeter Joint



Notch to remove leg for perimeter joint



Notch to remove leg for perimeter joint

Code	D (mm)	Qty
MLB100.16	10	25
MLB100.25	10	25
MLB100.35	10	25
MLB125.16	12.5	25
MLB125.25	12.5	25
MLB125.35	12.5	25

Code	D (mm)	Qty
MLT100.16	10	25
MLT100.25	10	25
MLT100.35	10	25
MLT125.16	12.5	25
MLT125.25	12.5	25
MLT125.35	12.5	25

PVC



Tile-In



2.5m



16


Black

25


Beige

35

Traffic Grey





MLB



MLT



MSA Optimax Heavy Duty

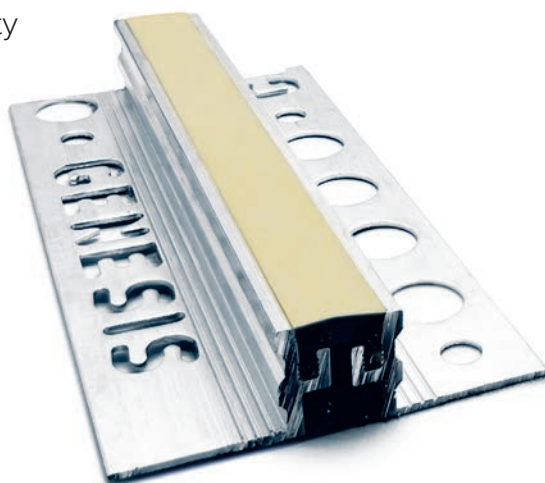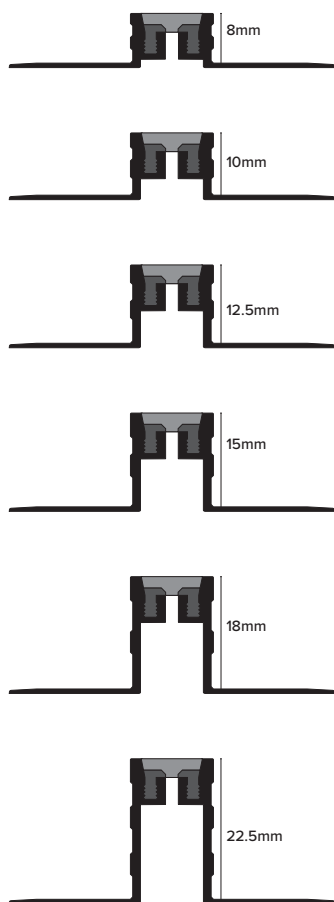

Code	D (mm)		Qty
MSA080.01	8	NEW	10
MSA080.11	8	NEW	10
MSA080.16	8		10
MSA080.25	8		10
MSA080.35	8		10
MSA080.46	8	NEW	10
MSA100.01	10	NEW	10
MSA100.11	10	NEW	10
MSA100.16	10		10
MSA100.25	10		10
MSA100.35	10		10
MSA100.46	10	NEW	10
MSA125.01	12.5	NEW	10
MSA125.11	12.5	NEW	10
MSA125.16	12.5		10
MSA125.25	12.5		10
MSA125.35	12.5		10
MSA125.46	12.5	NEW	10
MSA150.01	15	NEW	10
MSA150.11	15	NEW	10
MSA150.16	15		10
MSA150.25	15		10
MSA150.35	15		10
MSA150.46	15	NEW	10
MSA180.01	18	NEW	10
MSA180.11	18	NEW	10
MSA180.16	18		10
MSA180.25	18		10
MSA180.35	18		10
MSA180.46	18	NEW	10
MSA225.01	22.5	NEW	10
MSA225.11	22.5	NEW	10
MSA225.16	22.5		10
MSA225.25	22.5		10
MSA225.35	22.5		10
MSA225.46	22.5	NEW	10

Replaceable Infill

Code	W (mm)		Qty
MSI100.01	9.8	NEW	10
MSI100.11	9.8	NEW	10
MSI100.16	9.8		10
MSI100.25	9.8		10
MSI100.35	9.8		10
MSI100.46	9.8	NEW	10



Aluminium



Tile-In



2.5m



White



Grey



Black




Beige



Traffic Grey




Midnight Grey





MHS Heavy Duty

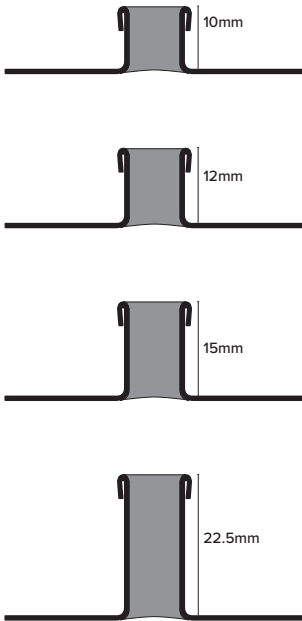

Code	D (mm)	Qty
MHS100.16	10	15
MHS100.35	10	15
MHS120.16	12	15
MHS120.35	12	15
MHS150.16	15	15
MHS150.35	15	15
MHS225.16	22.5	12
MHS225.35	22.5	12

Stainless Steel



Tile-In



2.5m




16


Black

35

Traffic Grey



MSS Optimax Heavy Duty



Code	D (mm)	Qty
MSS100.16	10	15
MSS100.35	10	15
MSS125.16	12.5	15
MSS125.35	12.5	15

Stainless Steel



Tile-In



2.5m




16

Black



35

Traffic Grey





MCA Compression Joint

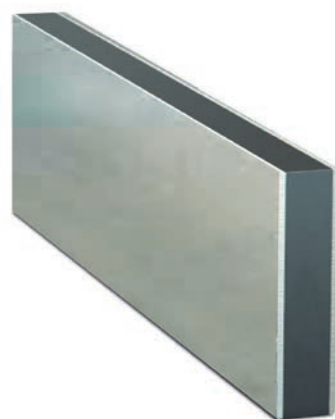

Code	D (mm)	Qty
MCA300.16	30	10
MCA300.35	30	10
MCA500.16	50	10
MCA500.35	50	10

Special order only. MOQ / lead times apply

Aluminium



Compression



2.5m




16

Black

35

Traffic Grey

MCS Compression Joint



Code	D (mm)	Qty
MCS300.16	30	10
MCS300.35	30	10
MCS500.16	50	10
MCS500.35	50	10

Special order only. MOQ / lead times apply

Stainless Steel



Compression



2.5m





16

Black

35

Traffic Grey

MCB Compression Joint

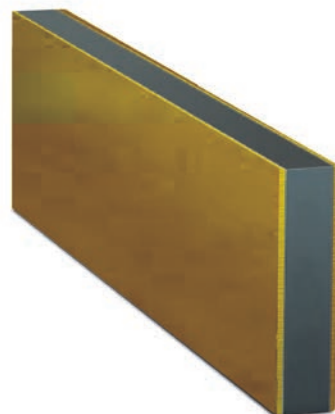

Code	D (mm)	Qty
MCB300.16	30	10
MCB300.35	30	10
MCB500.16	50	10
MCB500.35	50	10

Special order only. MOQ / lead times apply

Brass



Compression



2.5m



16

Black

35

Traffic Grey



Heavy Duty Structural Joints



Aluminium



Structural



3m




16


Black

35


Traffic Grey

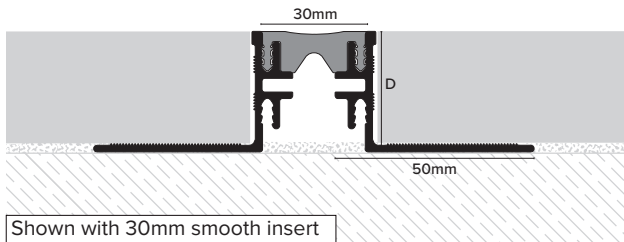

Shown with 30mm smooth insert

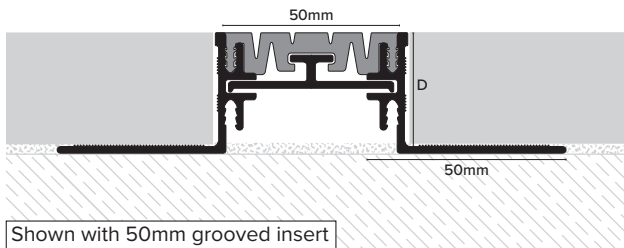


Shown with 50mm grooved insert

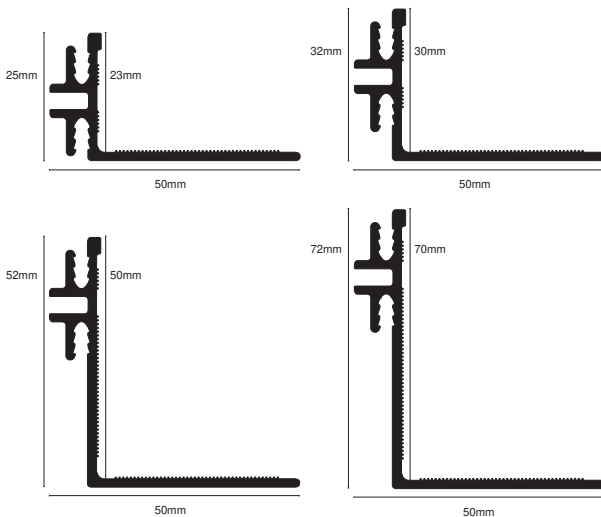

Insert - Smooth

Insert - Grooved

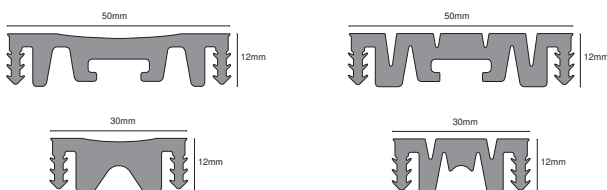

Central Support
(50mm only)



30mm Smooth

Code	W (mm)	D (mm)	Lat Movement (mm)
GFSR3023.16	36	23	8 (± 4)
GFSR3023.35	36	23	8 (± 4)
GFSR3030.16	36	30	8 (± 4)
GFSR3030.35	36	30	8 (± 4)
GFSR3050.16	36	50	8 (± 4)
GFSR3050.35	36	50	8 (± 4)
GFSR3070.16	36	70	8 (± 4)
GFSR3070.35	36	70	8 (± 4)

30mm Grooved

Code	W (mm)	D (mm)	Lat Movement (mm)
GFGR3023.16	36	23	10 (± 5)
GFGR3023.35	36	23	10 (± 5)
GFGR3030.16	36	30	10 (± 5)
GFGR3030.35	36	30	10 (± 5)
GFGR3050.16	36	50	10 (± 5)
GFGR3050.35	36	50	10 (± 5)
GFGR3070.16	36	70	10 (± 5)
GFGR3070.35	36	70	10 (± 5)

50mm Smooth

Code	W (mm)	D (mm)	Lat Movement (mm)
GFSR5023.16	56	23	12 (± 6)
GFSR5023.35	56	23	12 (± 6)
GFSR5030.16	56	30	12 (± 6)
GFSR5030.35	56	30	12 (± 6)
GFSR5050.16	56	50	12 (± 6)
GFSR5050.35	56	50	12 (± 6)
GFSR5070.16	56	70	12 (± 6)
GFSR5070.35	56	70	12 (± 6)

50mm Grooved


Code	W (mm)	D (mm)	Lat Movement (mm)
GFGR5023.16	56	23	14 (± 7)
GFGR5023.35	56	23	14 (± 7)
GFGR5030.16	56	30	14 (± 7)
GFGR5030.35	56	30	14 (± 7)
GFGR5050.16	56	50	14 (± 7)
GFGR5050.35	56	50	14 (± 7)
GFGR5070.16	56	70	14 (± 7)
GFGR5070.35	56	70	14 (± 7)

Special order only. MOQ / lead times apply





Structural Covers

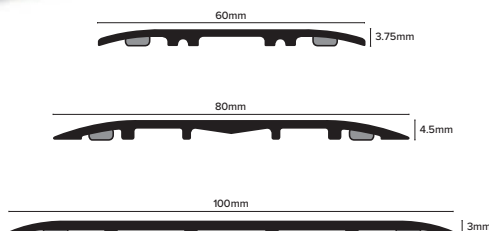

Code	W x D (mm)	Max Load	Material Thickness (mm)	Qty
GC2806	60 x 4	18kg/cm ²	1.7	10
GC2820	80 x 4	28kg/cm ²	2.2	10
GC2814	100 x 3	50kg/cm ²	2.2	10

Aluminium



Cover




2.7m





On Request



Self-Adhesive



Structural Covers

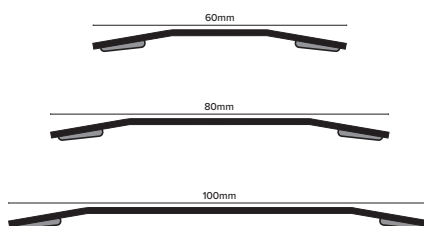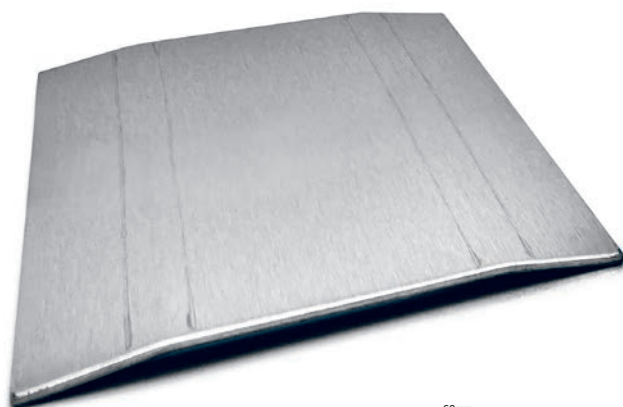

Code	W x D (mm)	Max Load	Material Thickness (mm)	Qty
GC2796.84	60 x 5	25kg/cm ²	1.5	10
GC2797.84	80 x 5	15kg/cm ²	1.5	10
GC2798.84	100 x 5	11kg/cm ²	1.5	10

Stainless Steel



Cover




2.5m



On Request



Self-Adhesive




Kitchen & Bathroom




KITCHEN &
BATHROOM





Genesis
The Perfect Finish

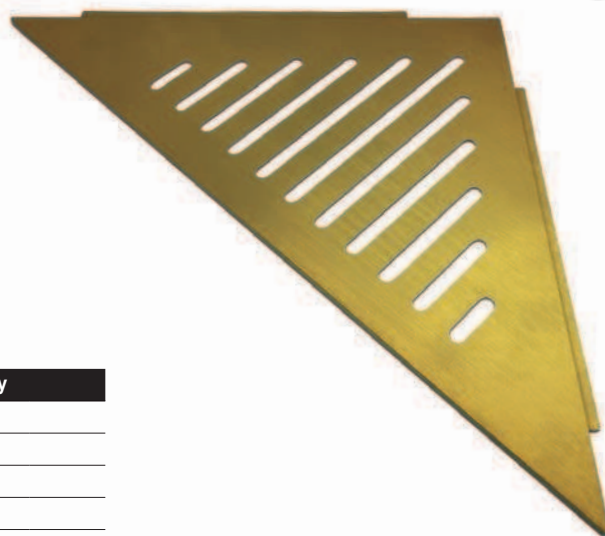
**KBSHD** HD Corner**NEW**

Code	Qty
KBSHD.102	1
KBSHD.117	1
KBSHD.190	1
KBSHD.401	1
KBSHD.411	1
KBSHD.414	1
KBSHD.420	1
KBSHD.425	1
KBSHD.435	1
KBSHD.462	1
KBSHD.463	1
KBSHD.489	1

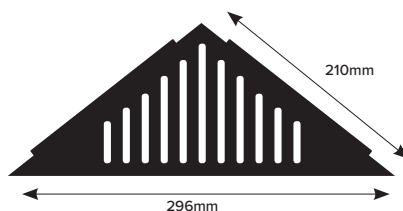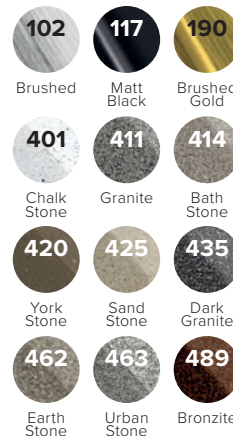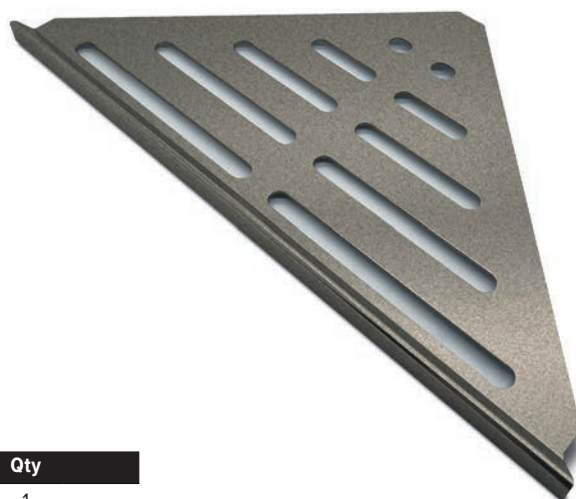
**Stainless Steel****Retro-Fit****4mm****KBSSA** Triangle XL

Code	Qty
KBSSA.91	1
KBSSA.401	1
KBSSA.411	1
KBSSA.414	1
KBSSA.420 NEW	1
KBSSA.425	1
KBSSA.435	1
KBSSA.462 NEW	1
KBSSA.463 NEW	1
KBSSA.489	1

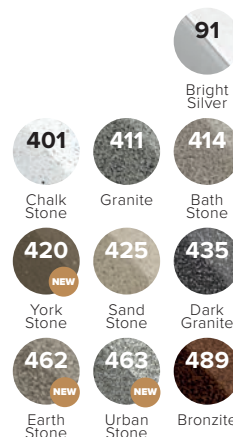**Aluminium****Retro-Fit****1.5mm**

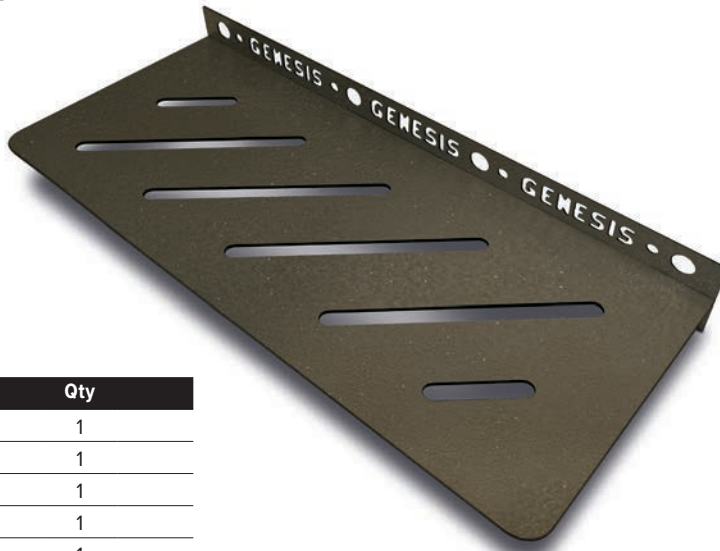**KBSTS** Straight

Code	Qty
KBSTS.102	1
KBSTS.117	1
KBSTS.187	1
KBSTS.190	1
KBSTS.401	1
KBSTS.411	1
KBSTS.414	1
KBSTS.420 NEW	1
KBSTS.425	1
KBSTS.435	1
KBSTS.462 NEW	1
KBSTS.463 NEW	1
KBSTS.489	1

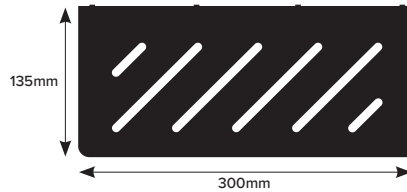

Stainless Steel



Tile-In



1.4mm



Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite




Earth Stone




Urban Stone



Bronzite

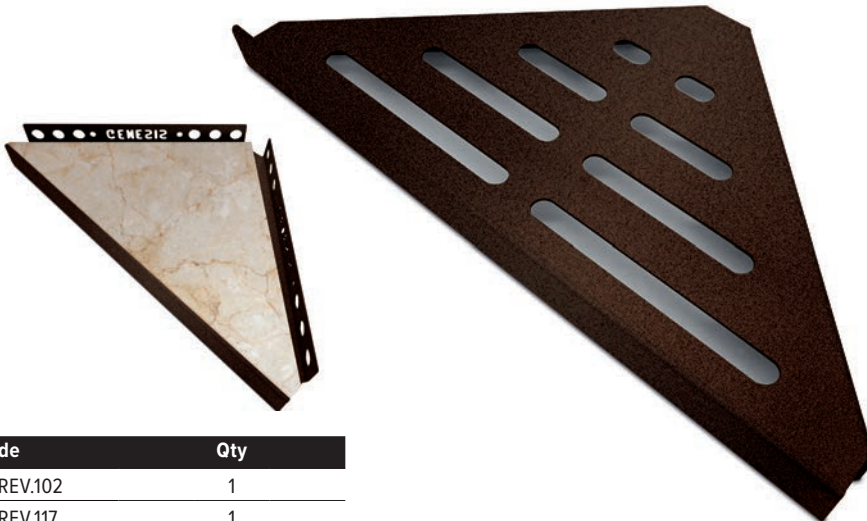KBREV Reversible Corner

Code	Qty
KBREV.102	1
KBREV.117	1
KBREV.187	1
KBREV.190	1
KBREV.401	1
KBREV.411	1
KBREV.414	1
KBREV.420 NEW	1
KBREV.425	1
KBREV.435	1
KBREV.462 NEW	1
KBREV.463 NEW	1
KBREV.489	1



Stainless Steel



Tile-In



Reversible



1.4mm



Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite



Earth Stone




Urban Stone



Bronzite

**KBSSS Triangle**

Code	Qty
KBSSS.102	1
KBSSS.117	1
KBSSS.187	1
KBSSS.190	1
KBSSS.401	1
KBSSS.411	1
KBSSS.414	1
KBSSS.420 NEW	1
KBSSS.425	1
KBSSS.435	1
KBSSS.462 NEW	1
KBSSS.463 NEW	1
KBSSS.489	1

**Stainless Steel****Retro-Fit****1.4mm**

Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite



Earth Stone




Urban Stone



Bronzite

KBSWS Wing

Code	Qty
KBSWS.102	1
KBSWS.117	1
KBSWS.187	1
KBSWS.190	1
KBSWS.401	1
KBSWS.411	1
KBSWS.414	1
KBSWS.420 NEW	1
KBSWS.425	1
KBSWS.435	1
KBSWS.462 NEW	1
KBSWS.463 NEW	1
KBSWS.489	1

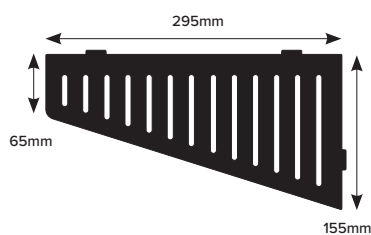**Stainless Steel****Retro-Fit****1.4mm**

Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite



Earth Stone



Urban Stone




Bronzite



**KBSDS Diamond**

Code	Qty
KBSDS.102	1
KBSDS.117	1
KBSDS.187	1
KBSDS.190	1
KBSDS.401	1
KBSDS.411	1
KBSDS.414	1
KBSDS.420 NEW	1
KBSDS.425	1
KBSDS.435	1
KBSDS.462 NEW	1
KBSDS.463 NEW	1
KBSDS.489	1

**Stainless Steel****Retro-Fit****1.4mm**

Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite




Earth Stone




Urban Stone



Bronzite

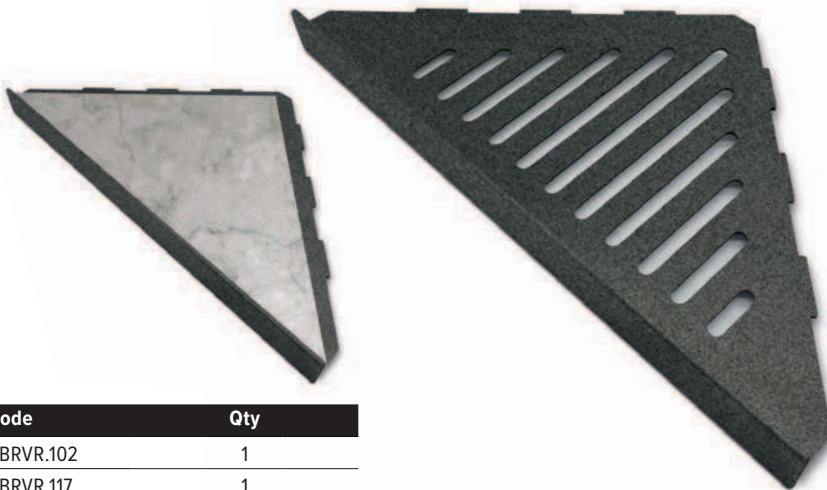KBRVR Retro Reversible**NEW**

Code	Qty
KBRVR.102	1
KBRVR.117	1
KBRVR.187	1
KBRVR.190	1
KBRVR.401	1
KBRVR.411	1
KBRVR.414	1
KBRVR.420	1
KBRVR.425	1
KBRVR.435	1
KBRVR.462	1
KBRVR.463	1
KBRVR.489	1

**Stainless Steel****Tile-In****Reversible****1.5mm**

Brushed



Matt Black



Gold



Brushed Gold



Chalk Stone



Granite



Bath Stone



York Stone



Sand Stone



Dark Granite



Earth Stone



Urban Stone




Bronzite



KBNS Niche


NEW

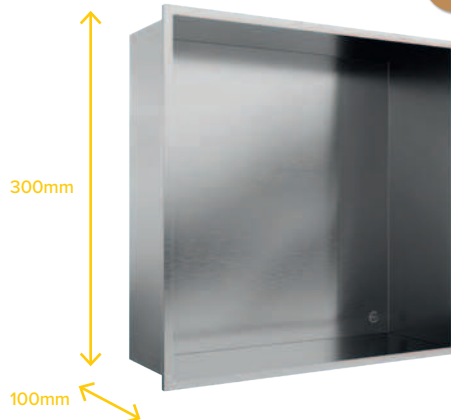

Code	Qty	600mm
KBNS3060.102	1	
KBNS3060.117	1	
KBNS3060.190	1	
KBNS3060.401	1	
KBNS3060.411	1	
KBNS3060.414	1	
KBNS3060.420	1	
KBNS3060.425	1	
KBNS3060.435	1	
KBNS3060.462	1	
KBNS3060.463	1	
KBNS3060.489	1	

Code	Qty	300mm
KBNS3030.102	1	
KBNS3030.117	1	
KBNS3030.190	1	
KBNS3030.401	1	
KBNS3030.411	1	
KBNS3030.414	1	
KBNS3030.420	1	
KBNS3030.425	1	
KBNS3030.435	1	
KBNS3030.462	1	
KBNS3030.463	1	
KBNS3030.489	1	



Stainless Steel

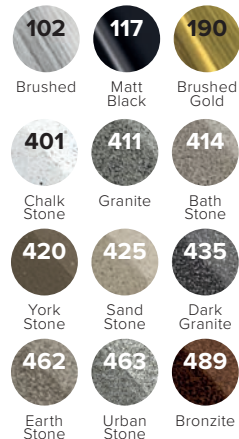

KBNV Niche with LED

NEW

Comes with LED light and transformer

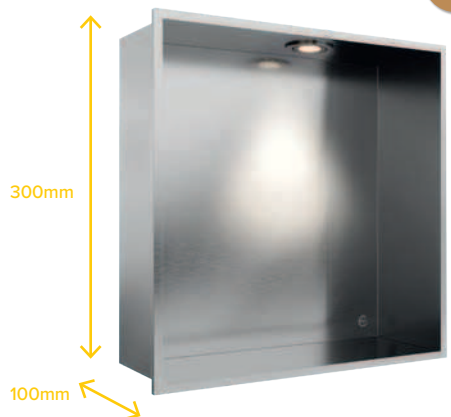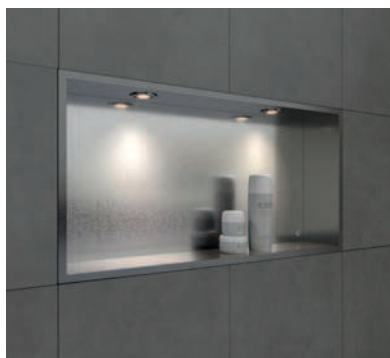

Code	Qty	600mm
KBNV3060.102	1	
KBNV3060.117	1	
KBNV3060.190	1	
KBNV3060.401	1	
KBNV3060.411	1	
KBNV3060.414	1	
KBNV3060.420	1	
KBNV3060.425	1	
KBNV3060.435	1	
KBNV3060.462	1	
KBNV3060.463	1	
KBNV3060.489	1	

Code	Qty	300mm
KBNV3030.102	1	
KBNV3030.117	1	
KBNV3030.190	1	
KBNV3030.401	1	
KBNV3030.411	1	
KBNV3030.414	1	
KBNV3030.420	1	
KBNV3030.425	1	
KBNV3030.435	1	
KBNV3030.462	1	
KBNV3030.463	1	
KBNV3030.489	1	

Stainless Steel



EyeLED



**SRP** Beading

Code	Fixing	Qty
SRP250.01	Over tile only	25

Corner Pieces

Code	Packed	Qty
SRE100.01	2 way x 5	50
SRI100.01	2 way x 5	50
SRT100.01	3 way x 5	50



PVC



Shower / Bath



2.5m

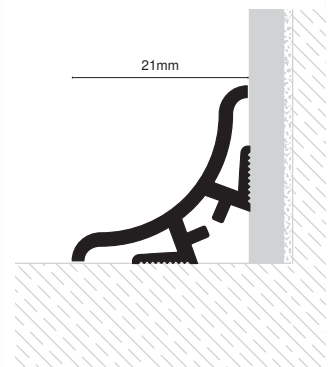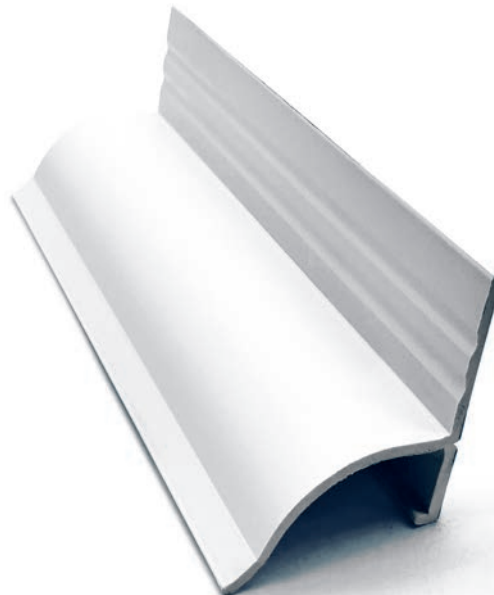**SBS** Seal Under / Over Tile

Code	Fixing	Qty
SBS180.01	Under / over tile	25

Corner Pieces

Code	Packed	Qty
SMT100.01	1 corner + 2 end caps	50


PVC





Shower / Bath



1.8m

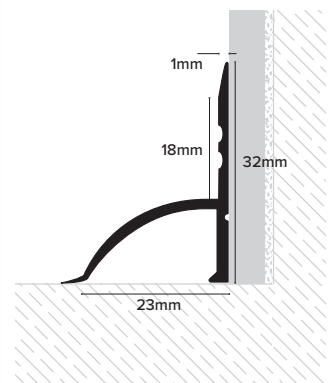

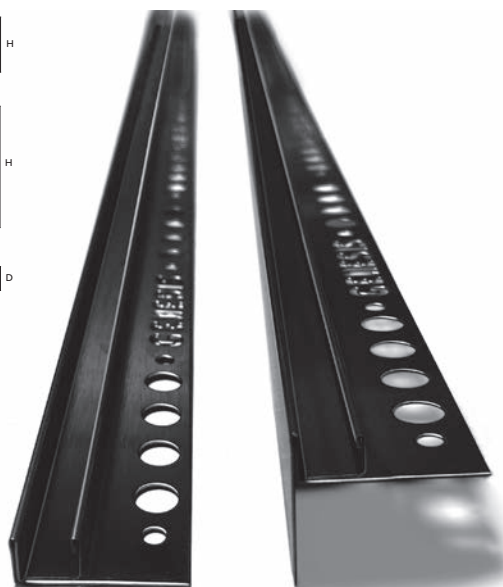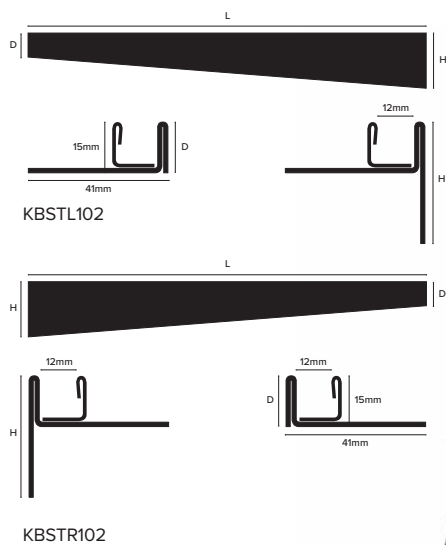
**KBST Shower Deck Profiles****NEW****Stainless Steel****15mm****12mm****2% Incline****102**

Brushed

117

Matt Black

Code	Side	D > H (mm)	Qty
KBSTL102.102	LEFT	10 > 32	10
KBSTL102.117	LEFT	10 > 32	10
KBSTR102.102	RIGHT	10 > 32	10
KBSTR102.117	RIGHT	10 > 32	10

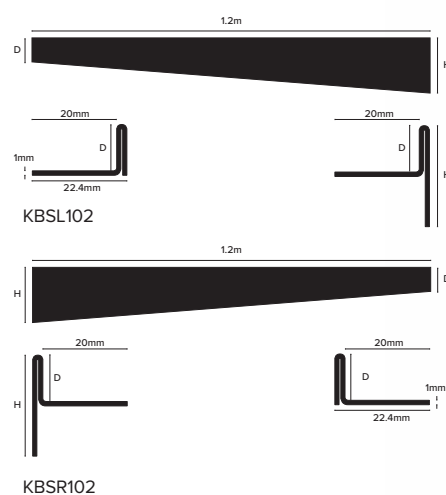KBS Shower Deck Profiles**Stainless Steel****2% Incline****1.2m****102**


Brushed

117

Matt Black

Code	Side	D > H (mm)	Qty
KBSL102.102	LEFT	10 > 32	10
KBSL102.117	LEFT	10 > 32	10
KBSR102.102	RIGHT	10 > 32	10
KBSR102.117	RIGHT	10 > 32	10

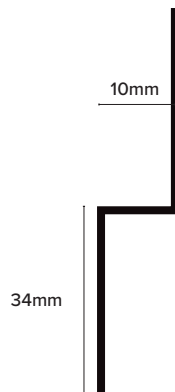

**KBSF** Profile Front**NEW**



Code	Qty
KBSF102.102	20
KBSF102.117	20

Stainless Steel**1.2m****102**


Brushed

117

Matt Black

LGA Glass Panel

Code	D (mm)	Qty	Price
LGA100.91	10	20	£9.31
LGA120.91	12	20	£10.17

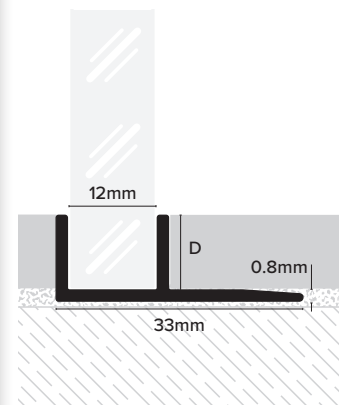Aluminium**Shower****2.5m**



Kitchen Surface Heat Protectors



Template Included

Code	Qty
KBSWP28	10

Stainless Steel



Retro-Fit




Pieces



3M



Kitchen Surface Heat Protector Studs



Template Included

Code	Qty
KBWPP8	10

Stainless Steel



Retro-Fit




Pieces



3M

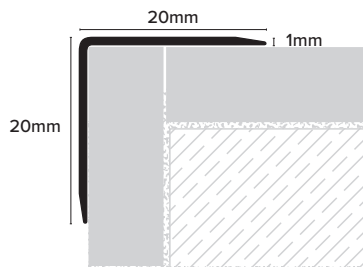

**EAA Corner Guard**

Code	W x D (mm)	Qty
EAA206.16	20 x 20	20
EAA206.17	20 x 20 NEW	20
EAA206.81	20 x 20	20
EAA206.86	20 x 20 NEW	20
EAA206.90	20 x 20	20
EAA206.91	20 x 20	20
EAA206.94	20 x 20	20
EAA206.401	20 x 20 NEW	20
EAA206.411	20 x 20 NEW	20
EAA206.414	20 x 20 NEW	20
EAA206.425	20 x 20 NEW	20

Aluminium**Corner****2.6m****16**

Black

17

Matt Black

81

Matt Silver

86

Bright Brass

91

Bright Silver

94

Brushed Silver

Stone**NEW****401**

Chalk Stone

411

Granite

414

Bath Stone



425

Sand Stone





PUA End Profile

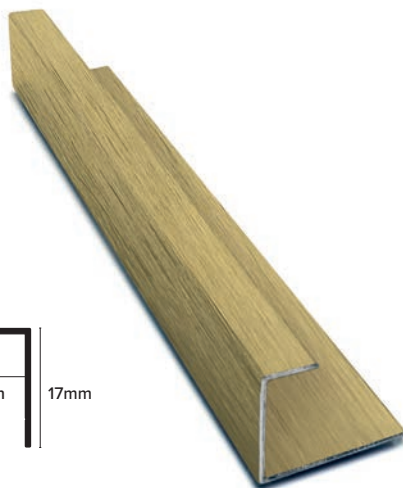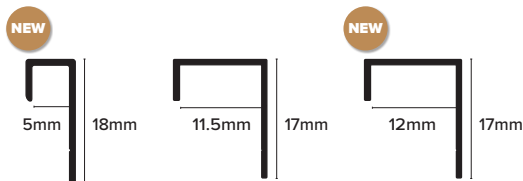

Code	D (mm)	L (m)	Qty
PUA506.01	5	2.6	50
PUA506.17	5	2.6	50
PUA506.90	5	2.6	50
PUA506.91	5	2.6	50
PUA118.01	11.5	2.4	50
PUA118.17	11.5	2.4	50
PUA118.81	11.5	2.4	50
PUA118.90	11.5	2.4	50
PUA118.91	11.5	2.4	50
PUA118.94	11.5	2.4	50
PUA128.01	12	2.4	50
PUA128.81	12	2.4	50
PUA128.91	12	2.4	50

Aluminium



Panel Profile



01

White

17

Matt Black

81

Matt Silver

90


Brushed Brass

91


Bright Silver

94

Brushed Silver



PHA H - Joint



Code	Qty
PHA118.01	50
PHA118.17	50
PHA118.81	50
PHA118.90	50
PHA118.91	50
PHA118.94	50

Aluminium



Panel Profile



11.5mm



2.4m



01

White

17

Matt Black

81

Matt Silver

90

Brushed Brass


91

Bright Silver

94

Brushed Silver

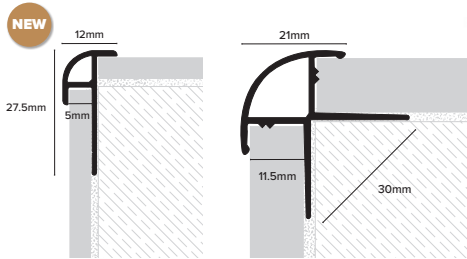

**PXA External Corner**

Code	D (mm)	L (m)	Qty
PXA506.01	5	2.6	25
PXA506.17	5	2.6	25
PXA506.90	5	2.6	25
PXA506.91	5	2.6	25
PXA118.01	11.5	2.4	25
PXA118.17	11.5	2.4	25
PXA118.81	11.5	2.4	25
PXA118.90	11.5	2.4	25
PXA118.91	11.5	2.4	25
PXA118.94	11.5	2.4	25

Aluminium

Panel Profile



01

White

17

Matt Black

81

Matt Silver

90


Brushed Brass

91

Bright Silver

94

Brushed Silver

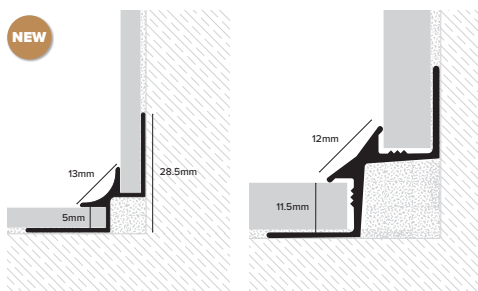PIA Internal Corner

Code	D (mm)	L (m)	Qty
PIA506.01	5	2.6	25
PIA506.17	5	2.6	25
PIA506.90	5	2.6	25
PIA506.91	5	2.6	25
PIA118.01	11.5	2.4	25
PIA118.17	11.5	2.4	25
PIA118.81	11.5	2.4	25
PIA118.90	11.5	2.4	25
PIA118.91	11.5	2.4	25
PIA118.94	11.5	2.4	25

Aluminium

Panel Profile



01

White

17

Matt Black

81

Matt Silver

90

Brushed Brass

91

Bright Silver

94

Brushed Silver





Domestic Bathroom


Project Specifications

Products Specified: PRODESO HEAT GRIP 5 MEMBRANE
CABLE & THERMOSTAT KIT
PRODESO HEAT GRIP CABLE CLIP
HEAT CABLE ROLLER
PROECOFON
PROFOIL PRO
PROBAND
PROBAND KOLL
PRE FORMED CORNERS

Sector: Residential

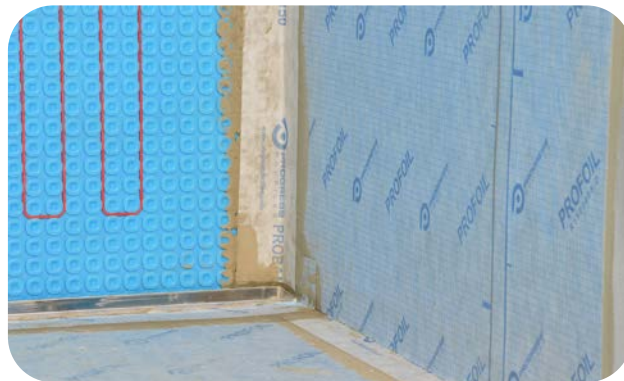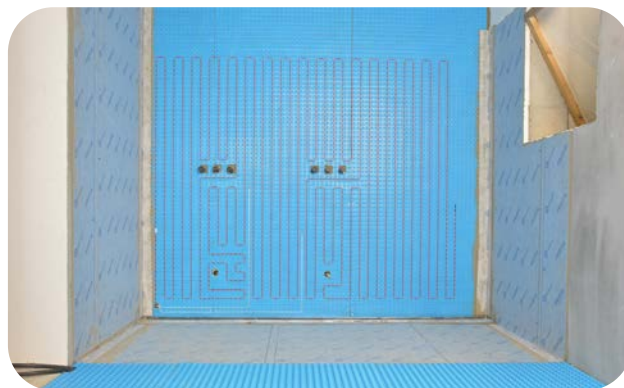

Membranes & Systems

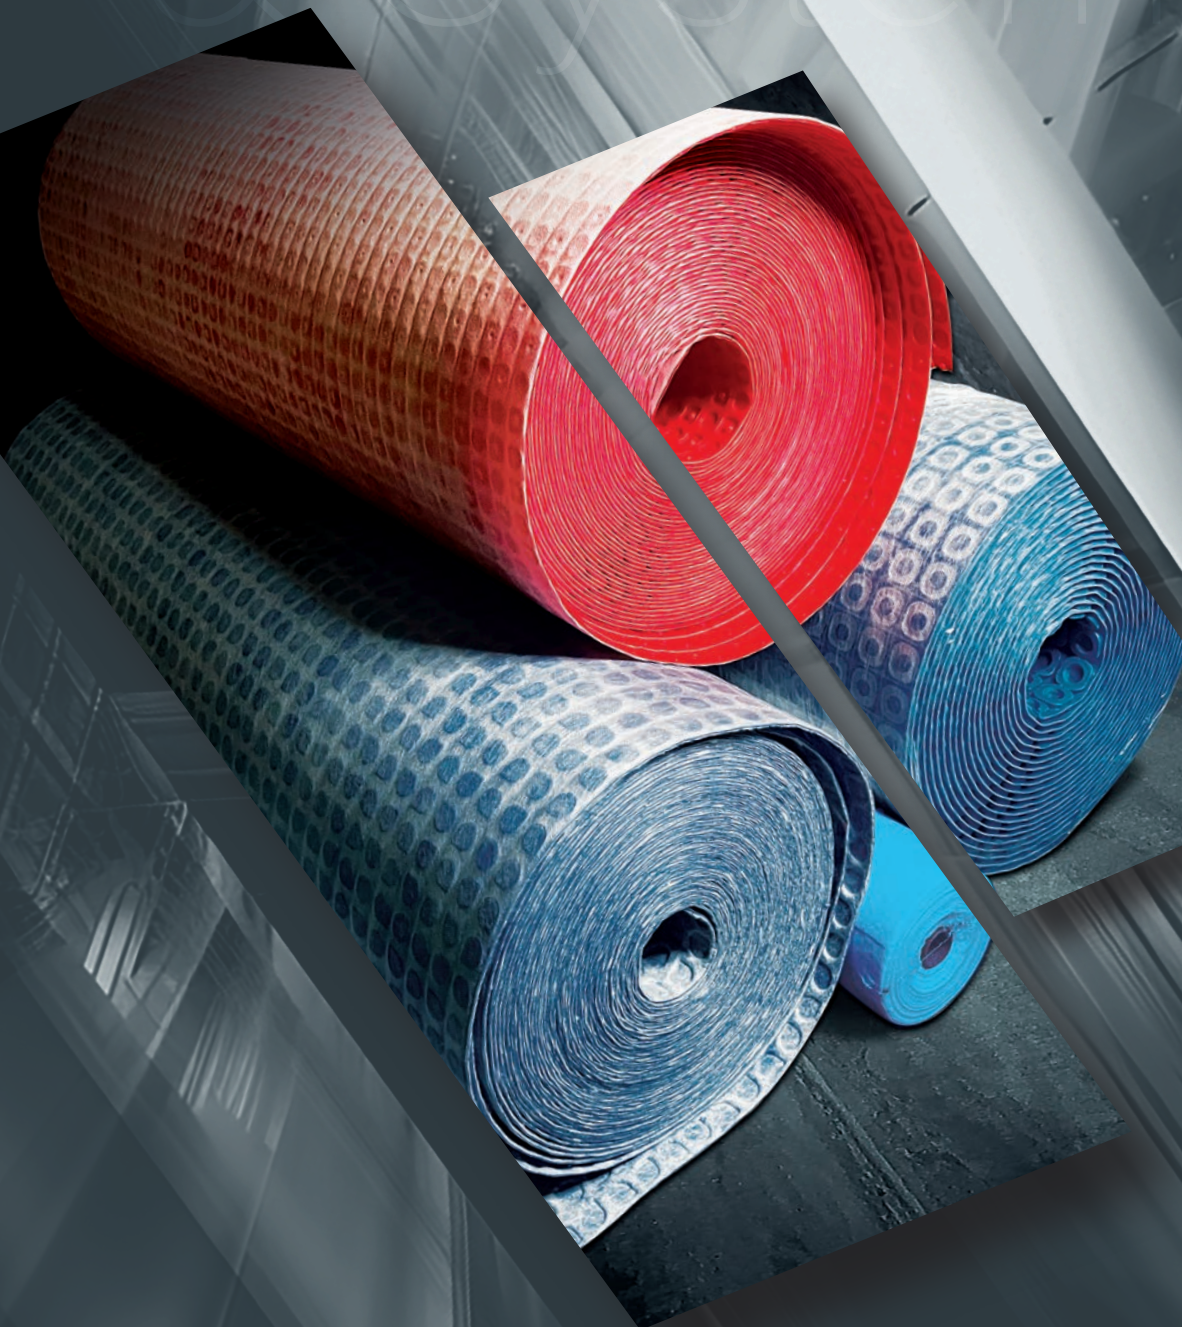

Genesis
The Perfect Finish



Eyes wide open on innovation


Founded in 1985, Progress Profiles S.p.A. is a manufacturer of tools and systems for the building and construction industry.

Cutting-edge innovation, state-of-the-art machinery, rich investments, and highly qualified personnel have enabled the development of an extensive range of wall and floor solutions, firmly establishing Progress Profiles in the international market and solidifying its position as an undisputed leader in the Italian market.

This success can be attributed to the collaborative efforts at the heart of the company, driven by highly dedicated, trained, and skilled professionals across every department—including technical, training, design, manufacturing, sales, logistics, and marketing.

The Progress Profiles portfolio includes uncoupling systems that prevent tile and substrate tensions, drainage solutions that ensure efficient water management, soundproofing systems that reduce noise transmission for improved acoustic comfort, and innovative heating systems that provide efficient, uniform warmth across floors and surfaces. Together, these solutions deliver high-quality, integrated performance for both residential and commercial projects.



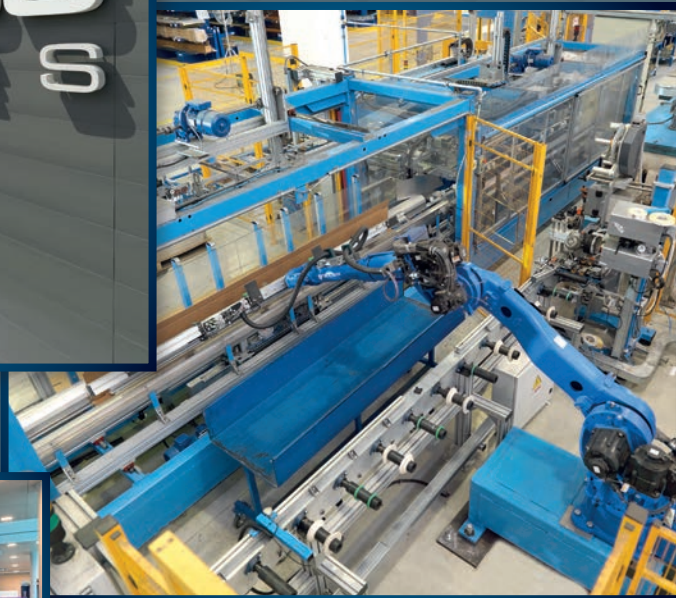



PRODESO® Membrane System

PRODESO® MEMBRANE SYSTEM is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any dimension.

Using **PRODESO® MEMBRANE SYSTEM** there are many advantages, which gives the utmost laying flexibility, floor protection and long-time guarantee indoors and outdoors.

Time saving: installation time is drastically reduced. Membrane, tile installation and grouting can be completed in the same day.

Versatile: it can be used on any supports, both indoor and outdoor.

Waterproofing: it guarantees the flooring installation and the waterproofing of the substrate in overlapping too, on cracked and not perfectly cured supports with possible vapour pressure.



Code


PDES 3530/EN

Prodeso® Membrane

Polypropylene non-woven fabric

HDPE polyethylene sheet

Polypropylene spunbond

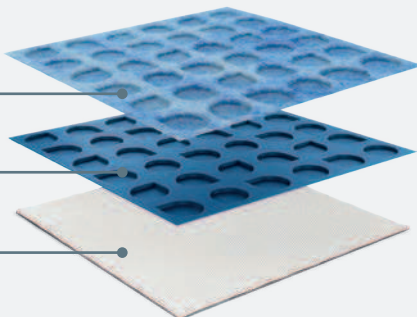



01. Large size tiles

02. Thin-set / adhesive

03. **Prodeso® Membrane**

04. Thin-set / adhesive

05. Screed / Plywood / OSB

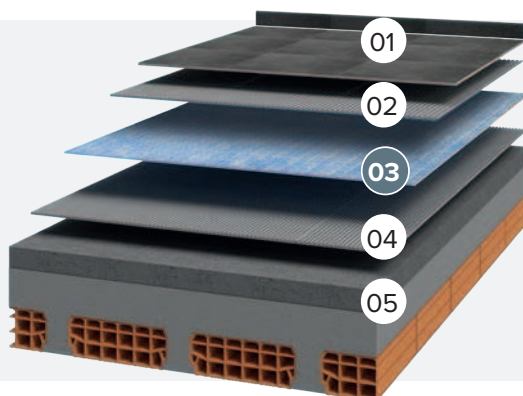

See **BIHUI** mat roller on page 155



HDPE Polypropylene



30m



1m



3.5mm




Internal / External




Qty: 8




Product Functions




Decoupling (Crack Bridging)




Vapour Management



Load Distribution



Waterproofing



Heating Distribution

**PRODESO® Eco / Eco Stick System**

PRODESO® ECO is an uncoupling and waterproofing membrane for indoor application on problematic substrates before the installation of ceramic and natural stones. The membrane, made of high density polyethylene is equipped with square cavities dovetail shaped. It ensures the installation of any flooring on cracked and not perfectly cured substrates and therefore with possible vapour tensions. The membrane ensures the installation of a new flooring also on old one. The membrane is available in two versions:

- 1) with thermo-welded polypropylene nonwoven fabric for its installation with cementitious adhesives.
- 2) with last generation adhesive (PSA), applied on the back of the membrane and protected with a silicone film, which guarantees its installation on wood, metal and non-absorbent substrates in general with high cost and installation time reduction.

**Code**

PDESEC 3530




Self-Adhesive

Code

PDESECT 3530

Prodeso® Eco Membrane


HDPE Polyethylene Sheet

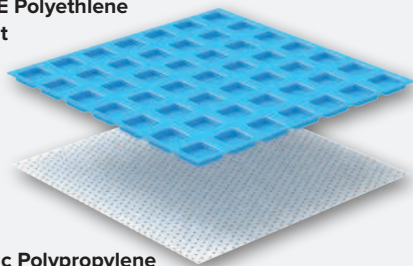


Fabric Polypropylene

Prodeso® Eco Stick Membrane


HDPE Polyethylene Sheet

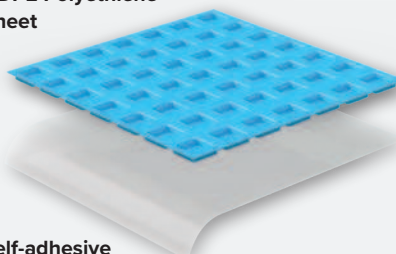

Self-adhesive

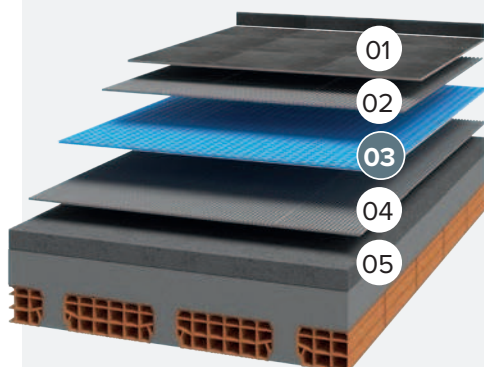Prodeso® Eco Membrane

01. Tiles
02. Thin-Set / Adhesive
03. **Prodeso® Eco Membrane**
04. Thin-Set / Adhesive
05. Screed / Plywood / OSB

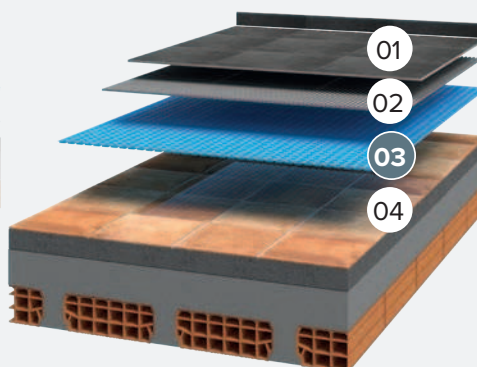Prodeso® Eco Stick Membrane

01. Tiles
02. Thin-Set / Adhesive
03. **Prodeso® Eco Stick Membrane**
04. Old Tiles / Plywood / OSB

HDPE Polyethylene



30m



1m








4mm



Internal



Qty: 9

**Product Functions****Decoupling
(Crack Bridging)****Vapour
Management****Load Distribution****Waterproofing****Heating Distribution**



PRODESO® Heat Grip 5 / Stick System

The electric underfloor and wall heating system **PRODESO® HEAT GRIP 5 SYSTEM**, designed, manufactured and patented by Progress Profiles, is an innovative system that allows to obtain in a short time and at low cost a pleasantly warm and extremely comfortable environment. The membrane is applied using normal cementitious adhesives and thanks to its uncoupling and waterproofing properties can be installed on cracked substrates and also during shrinkage. Thanks to the latest generation Wi-Fi thermostat, the system can be programmed daily or weekly and even remotely, this allows you to optimize comfort and reduce consumption. Easy and quick to install in any environment, it has an overall thickness, including the adhesive, of only 5.5 mm and does not require any maintenance over time. An intelligent technology and a responsible choice that puts in the foreground the values of eco-sustainability and energy saving in tune with the trends of contemporary architecture and the most advanced home automation.

Also available in self-adhesive version **PRODESO® HEAT GRIP 5 STICK SYSTEM**.


Code

PDESHG 5151



Self-Adhesive

Code

PDESHG5ST 151

HDPE Polyethylene



15m



1m



5.5mm



Qty: 9



Prodeso® Heat Grip 5 Membrane







- 01. Tiles
- 02. Thin-Set / Adhesive
- 03. **Prodeso® Heat Grip 5 Membrane**
- 04. **Prodeso® Heat Grip 5 Cable**
- 05. Thin-Set / Adhesive
- 06. Screed / Plywood / OSB

Prodeso® Heat Grip 5 Stick Membrane



- 01. Tiles
- 02. Thin-Set / Adhesive
- 03. **Prodeso® Heat Grip 5 Membrane**
- 04. **Prodeso® Heat Grip 5 Cable**
- 05. Old Tiles / Plywood / OSB

Product Functions


**Decoupling
(Crack Bridging)**

**Vapour
Management**

Load Distribution

Waterproofing

**PRODESO® Heat Grip 5 Cable**

A constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT GRIP 5 / STICK Membrane**. The cable distance can be 6.2 or 9.3 cm.

Code	Cable L (m)	Heated Surface Wall (6.2cm*)	Heated Surface Floor (9.3cm*)	Total Power (w)
PDHG5CBM 20	19.8	1.19 m ²	2.0 m ²	250
PDHG5CBM 26	25.8	1.55 m ²	2.5 m ²	325
PDHG5CBM 31	30.6	1.83 m ²	3.0 m ²	385
PDHG5CBM 36	36.0	2.14 m ²	3.5 m ²	450
PDHG5CBM 40	40.2	2.38 m ²	4.0 m ²	500
PDHG5CBM 46	46.2	2.74 m ²	4.5 m ²	575
PDHG5CBM 52	52.2	3.10 m ²	5.0 m ²	650
PDHG5CBM 62	61.8	3.69 m ²	6.0 m ²	775
PDHG5CBM 72	72.0	4.29 m ²	7.0 m ²	900
PDHG5CBM 82	82.2	4.88 m ²	8.0 m ²	1.025
PDHG5CBM 94	94.2	5.60 m ²	9.0 m ²	1.175
PDHG5CBM 104	103.8	6.19 m ²	10.0 m ²	1.300
PDHG5CBM 114	114.0	6.80 m ²	11.0 m ²	1.425
PDHG5CBBM450# 450				

*Cable distance

#Component Cable length to be cut to size, max length 114.0m / Requires Thermostat and Cold Cable to be bought separately



Cavity Spacing



Cavity Spacing

**PRODESO® Heat Grip 5 Thermostat**

Kits include a digital or analogical programmable thermostat, flush mounting box, corrugated pipe and two floor temperature sensors.




Code	Description
PDHTSMWTK*	Touchscreen digital thermostat Kit - Black
PDHTSMWTKW*	Touchscreen digital thermostat Kit - White
PDHTSK 230V	Analog thermostat Kit
PDHTSMWT 230*	Touchscreen digital thermostat - Black
PDHTSMWTW 230*	Touchscreen digital thermostat - White
PDHTSM 230	Analog thermostat

**Accessories**

PDHGCBF



PDHGCK 110



PEF550A



PSC



PCBLF

Code	Description
PSC	150mm cable installation roller - aluminium
PDHGCK 110	PRODESO® HEAT GRIP 5 1m shrink tube kit with 10 lugs
PCBLF	PRODESO® HEAT GRIP 5 cable CLIP - 200 pack
PDHGCBF	PRODESO® Heat Grip Power Cable (Cold Cable) 2.5m
PEF 550A	PROECOFON Adhesive tape



PRODESO® Heat Grip 5 Kit System




Floor and wall electric heating system kit. The polyethylene membrane, with its uncoupling, waterproofing and vapor management properties, has a thickness of just 5.5mm.

Kit includes:

PRODESO® HEAT GRIP 5 MEMBRANE

PRODESO® HEAT GRIP 5 CABLE

PRODESO® HEAT GRIP 5 THERMOSTAT KIT

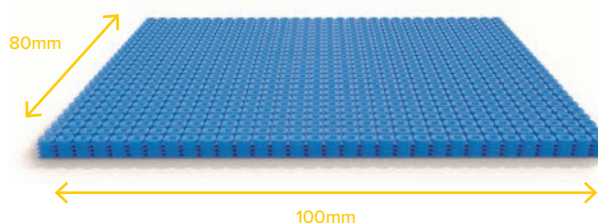

PRODESO® Heat Grip 5 Kit System - Black

Code	MQ Membrane	Panels x Kit	Cable	Heated Surface Floor (9.3cm*)	Total Power (w)
PDESHKMB 4	3.2	4	PDHCB23	2.20	300
PDESHKMB 7	5.6	7	PDHCB41	3.80	520
PDESHKMB 10	8.0	10	PDHCB59	5.50	750

*Cable distance



PRODESO® Heat Grip 5 Kit System - White

Code	MQ Membrane	Panels x Kit	Cable	Heated Surface Floor (9.3cm*)	Total Power (w)
PDESHKMW 4	3.2	4	PDHCB23	2.20	300
PDESHKMW 7	5.6	7	PDHCB41	3.80	520
PDESHKMW 10	8.0	10	PDHCB59	5.50	750

*Cable distance




Accessories



PDHGCBF



PDHGCK 110



PEF550A



PSC



PCBLF

Code	Description
PSC	150mm cable installation roller - aluminium
PDHGCK 110	PRODESO® HEAT GRIP 5 1m shrink tube kit with 10 lugs
PCBLF	PRODESO® HEAT GRIP 5 cable CLIP - 200 pack
PDHGCBF	PRODESO® Heat Grip Power Cable (Cold Cable) 2.5m
PEF 550A	PROECO FON Adhesive tape



PATENTED
102016000033439





PRODESO® Sound / Sound Stick System

PRODESO® SOUND SYSTEM

is an industry-leading soundproofing membrane to be applied under the tile, which reduces up to 20 dB of the acoustic wave produced by footsteps, presenting a substantial contribution to Part E Building Regulations.

PRODESO® SOUND STICK guarantees an acoustic wave reduction from footfall up to 17 dB in the case of glued floors and 20 dB in the case of laminate floorboards and wood.



NEW

30m

Code

PDSND 30



Self-Adhesive

20m

Code

PDSNDST 20

Polypropylene



3 Layer



Part E Building Standards




Prodeso® Sound Membrane

Fabric Polypropylene (PP)

Sheet in Polyethylene (PE)

Fabric Polypropylene (PP)

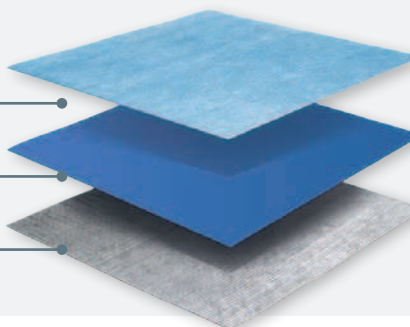

NEW

1m

2.3mm


Qty: 12

Prodeso® Sound Stick Membrane

Fabric Polypropylene (PP)

Sheet in Polyethylene (PE)

Fabric Polypropylene (PP) with self adhesive film

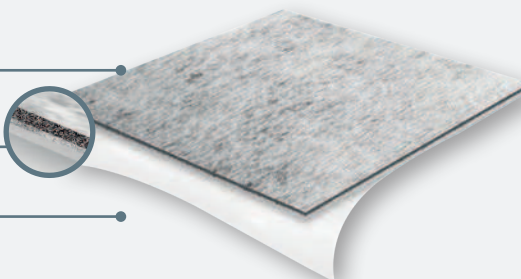

1m

2.5mm

Qty: 16

Accessories

PRODESO® Sound Tape



50m

Code

PDSNDTP 550

Qty

36

PROECOFON Adhesive Tape



25m

50mm

5mm

Code

PEF 550A



Speed:

drastically reduces renovation times; from the installation of the membrane until the laying of the flooring it is possible to work without interruption.

Versatility:

guarantees installation on any support, even of very big size.


Soundproofing:

in just over 2mm, a very high noise reduction is achieved.



Prodeso® Sound System


NEW

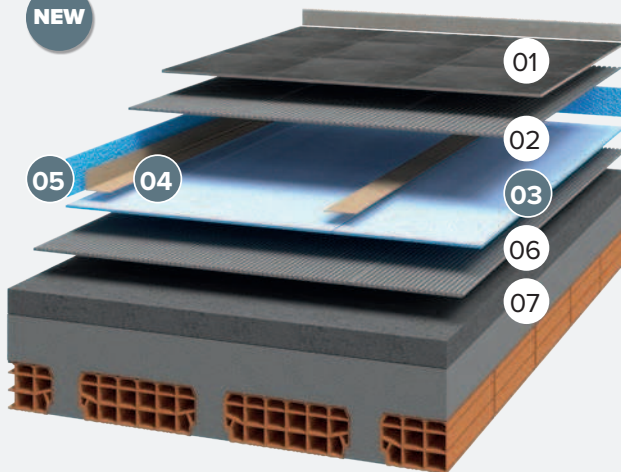

- 01. Tiles
- 02. Thin-set / Adhesive
- 03. Prodeso® Sound Membrane
- 04. Prodeso® Sound Tape
- 05. Proecofon
- 06. Thin-set / Adhesive
- 07. Screed



Prodeso® Sound Stick System

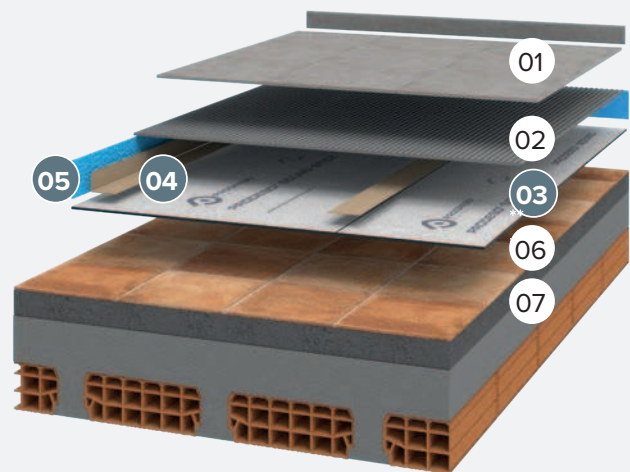

- 01. Tiles
- 02. Thin-set / Adhesive
- 03. Prodeso® Sound Stick Membrane
- 04. Prodeso® Sound Tape
- 05. Proecofon
- 06. Old Tiles / Floating Floors / Laminate
- 07. Screed



**17-18dB for Old Tiles. *Up to 20dB for Floating Floors and Laminate






Profoil Panel System



PROFOIL PANEL is a range of panels in extruded polystyrene with a density of 33 kg/m³. They are covered on both sides with a water and vapour-proof membrane. The panels, suitable for indoor applications, are stiffened, by the waterproof membranes and the adhesive used for their fixing. The panels are designed and tested to have mechanical resistance and long durability. For this reason they are therefore suitable as support for laying the tiles, to waterproof and create structures and load-bearing walls. The panels are available in a thickness of 7, 10, 20, 30 and 48 mm and a size of 1300 x 600mm. **PROFOIL PANEL**, which allows the work to be carried out quickly and inexpensively, is suitable for indoor application with a thermal insulation function on floor, wall and ceiling. The panels can be applied on rough walls, on old supports and floors, on fixed structures in wood and metal, for the realization of partitions walls, tops for kitchens, washbasins, shelves and furniture of different types.

1300mm

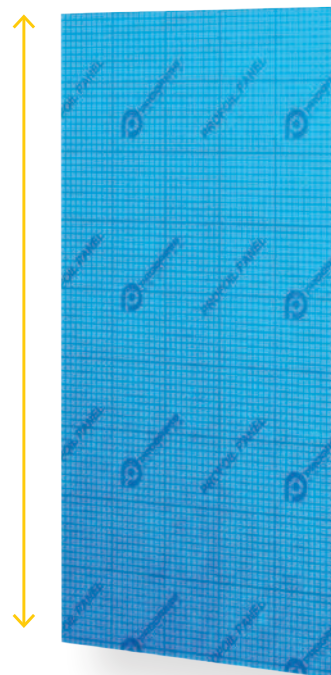

600mm

Profoil Panel System 1300 x 600 mm / 0.78m²

Code	Thickness (mm)	Pcs / Pallet	m ² / Pallet
PFLPAN 7613	7	160	124.8
PFLPAN10613	10	112	87.36
PFLPAN 20613	20	56	43.68
PFLPAN 30613	30	24	18.72
PFLPAN 48613	48	14	10.92

NEW

Accessories

Proband 150



150m

0.42mm

Code	L Roll (m)	Roll / Pack
PRBPE 1507	7.5	16
PRBPE 1530	30	6


7mm

10mm

20mm

30mm

48mm

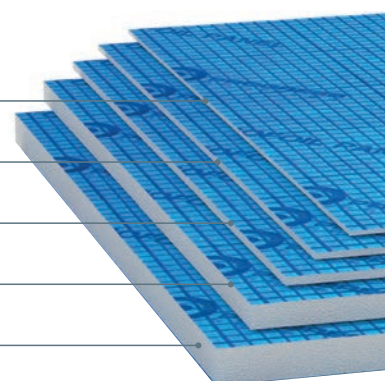

Profoil Dowels



Zinc Coated Metal

Code	L (mm)	Qty
TZPFP 110	100	250
TZPFP 140	140	250
TZPFP 170	170	250
TZPFP 200	200	250

Proband Fix



Code	Description	Qty
PRBFXB	Cartridges - WHITE	12

Profoil Panel Washers





Zinc Coated Metal


Code	L (mm)	Qty
RFPFP 36	35	100




Examples of applications for different thicknesses:



6 mm



13 & 25 mm



50 mm







Profoil Panel Niche

Prefabricated with built-in elements of **PROFOIL PANEL** to make wall niches and support surfaces.

XPS



12.5mm

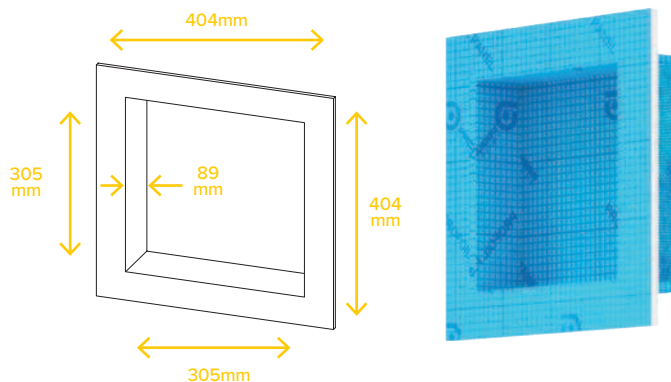
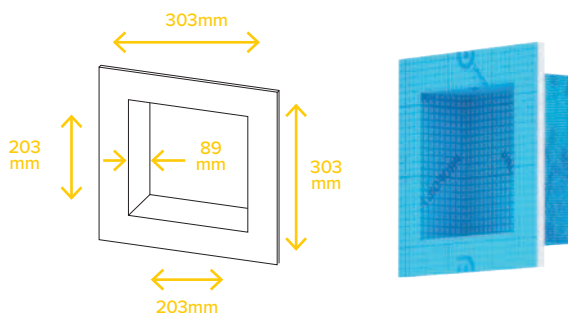


Niche 88

Code	Inside Size (mm)	Qty
PFLPANICH 88	203.2 x 203.2	1

Niche 1212

Code	Inside Size (mm)	Qty
PFLPANICH 1212	304.5 x 304.8	1

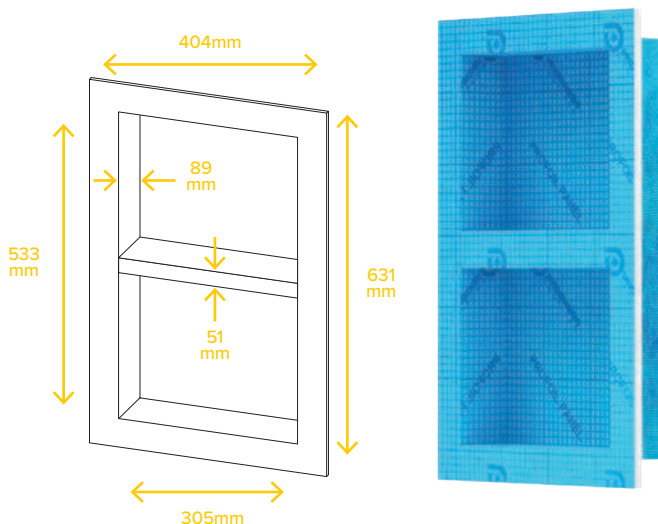
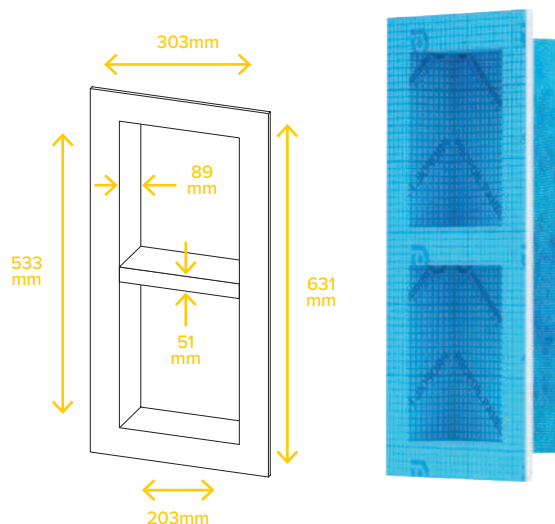


Niche 821

Code	Inside Size (mm)	Qty
PFLPANICH 821	203.2 x 533.5	1


Niche 1221

Code	Inside Size (mm)	Qty
PFLPANICH 1221	304.8 x 533.4	1

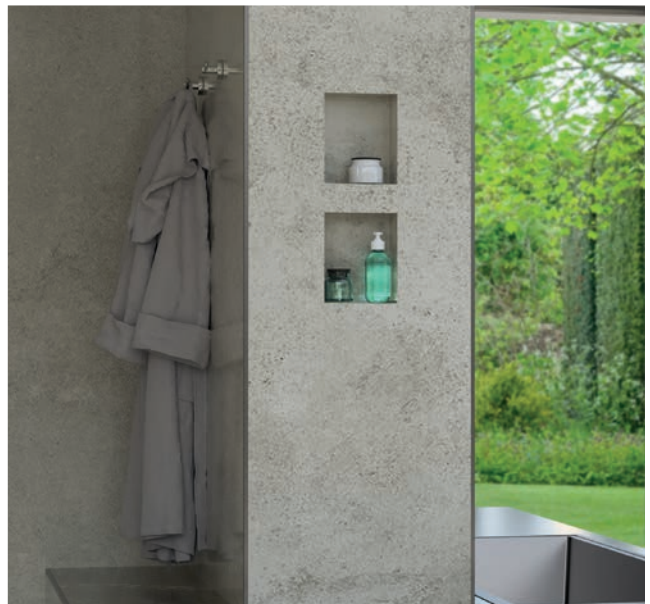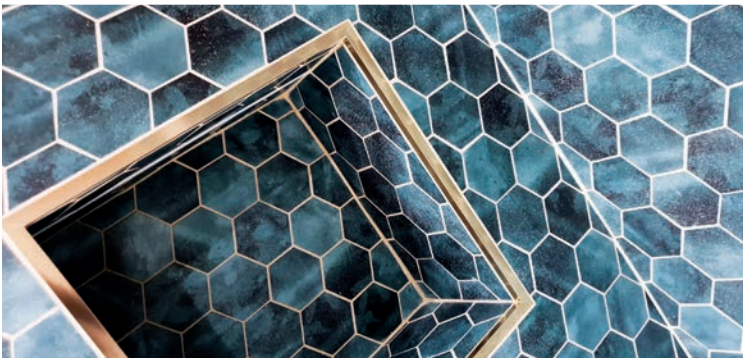



Profoil Pro System

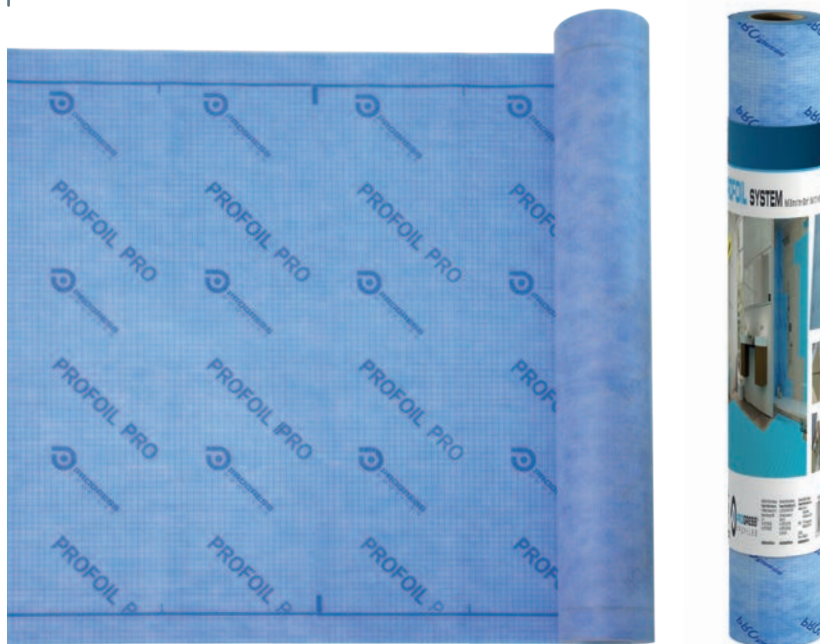

Code

PFL0PR 0430

This waterproofing system is composed of the elastic membrane **PROFOIL PRO** and other several elements:

PROFOIL PRO: is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support;

PROFOIL PASTE: thin-layer elastic membrane, with a high workability and hydrophobicity, quick and ready to use. It is suitable to waterproof curved structures and niches where the application of the **PROFOIL** membrane would be difficult;

PROBAND FIX: single component, moisture-curing sealant with silane polymers to waterproof adjacent rolls of **PROFOIL** using **PROBAND 150**;

PROBAND 150: waterproofing tape in elastic polyethylene provided on both sides with non-woven polypropylene fabric that guarantees its bonding;

With **PROFOIL SYSTEM**, complete with all special pieces as the internal and external corner and the sealing dowel it is possible to waterproof environments in direct or occasional contact with water such as pools, bathrooms and kitchens, and with high vapour pressure such as saunas and wellness centres.

NHBC specified standard EAD 030352-00-0503 products

Polypropylene & Non-woven Polypropylene



30m



1m



0.42mm



Qty: 40



Accessories

Proband 150




Code	W (mm)	L Roll (m)	Roll / Pack
PRBPE 1530	150	30	6

Proband Fix




Code	Description	Qty
PRBFXB	Cartridges - WHITE	12

Pre-formed Corners



Code	Qty
PRBI Internal	10
PRBE External	10


Pipe Collar




Code	Size (mm)
PRBT	125 x 125

**Proshower Panel** LINEAR

Code	Qty
PSHPAN	1

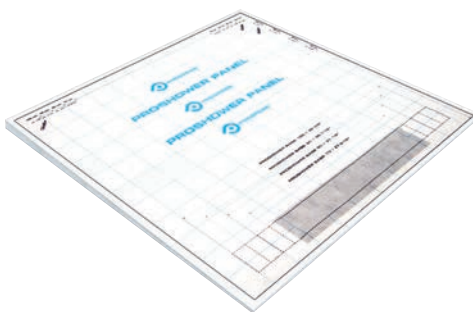**Moulded Polystyrene**
with glued Profoil**2% Incline****Proshower Panel** Extension

Examples of Laying

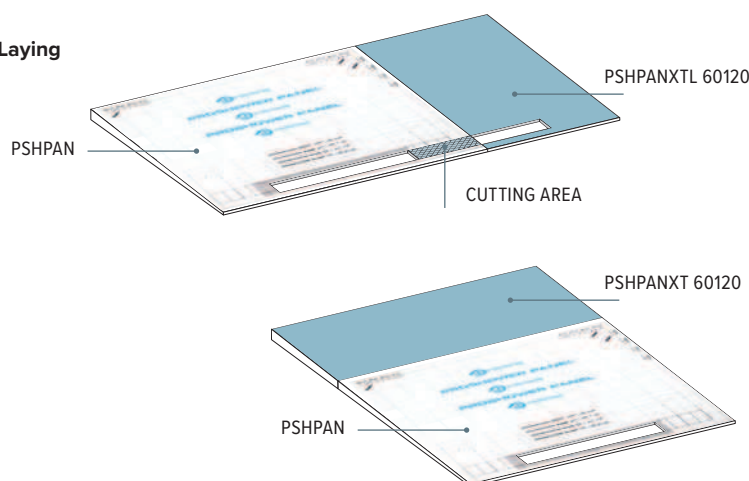**Moulded Polystyrene**
with glued Profoil**60mm****1200mm****2% Incline**

Code	Description	Qty
PSHPANXT 60120	Extension	1
PSHPANXTL 60120	Lateral Extension	1

Accessories

Proband 150

Code	W (mm)	L Roll (m)	Roll / Pack
PRBPE 1530	150	30	6

Proband Fix

Code	Description	Qty
PRBFXB	Cartridges - WHITE	12

Profoil Pro

Code	Description
PFLOPR 0430	Profoil Pro Membrane



Proshower Base L




Stainless Steel
AISI 304/1.4301-V2A



PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 – V2A steel for the realisation of floor-level shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistance in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.



Code	W (mm)	Qty
PSHWDL 30	300	1
PSHWDL 70	700	1
PSHWDL 80	800	1
PSHWDL 90	900	1
PSHWDL 100	1000	1
PSHWDL 120	1200	1

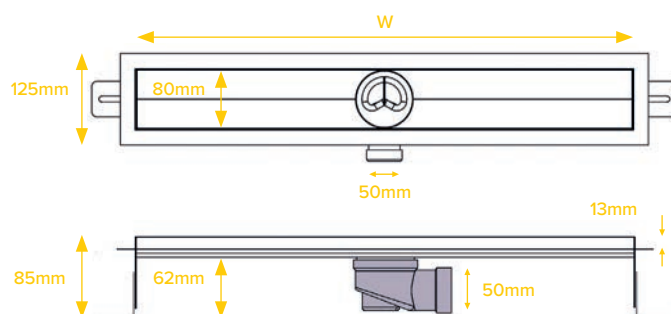


Proshower Base Basic

Polypropylene





Code	W (mm)	Qty
PSHWBB 60	600	1
PSHWBB 70	700	1
PSHWBB 80	800	1
PSHWBB 90	900	1

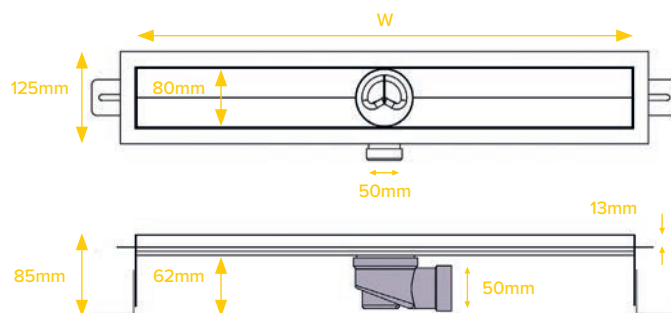

Profoil Section and Double Sided Tape

Code	W (mm)	Qty
PSHANT 30	300	1
PSHANT 60	600	1
PSHANT 70	700	1
PSHANT 80	800	1
PSHANT 90	900	1
PSHANT 100	1000	1
PSHANT 120	1200	1

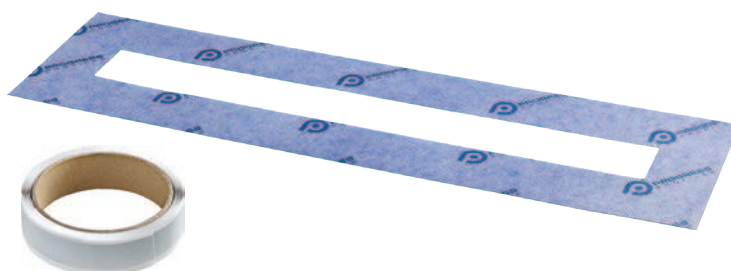

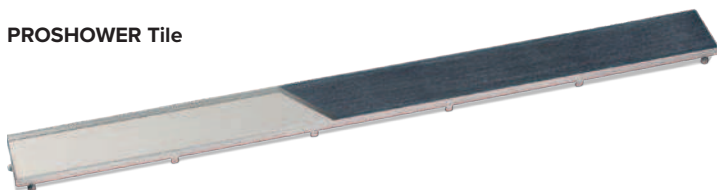**Proshower Top**Stainless Steel
AISI 304/1.4301-V2A**PROSHOWER Tile**

*PSHWT 30,100,120 Provided only combined with Proshower Base L.

**PSHWT 60 Provided only combined with Proshower Base Basic.

Code	W x D (mm)	Qty
PSHWT 30*	300 x 80	1
PSHWT 60**	600 x 80	1
PSHWT 70	700 x 80	1
PSHWT 80	800 x 80	1
PSHWT 90	900 x 80	1
PSHWT 100*	1000 x 80	1
PSHWT 120*	1200 x 80	1

PROSHOWER Line

*PSHWL 100,120 Provided only combined with Proshower Base L.

**PSHWL 60 Provided only combined with Proshower Base Basic.


Code	W x D (mm)	Qty
PSHWL 60**	600 x 80	1
PSHWL 70	700 x 80	1
PSHWL 80	800 x 80	1
PSHWL 90	900 x 80	1
PSHWL 100*	1000 x 80	1
PSHWL 120*	1200 x 80	1

PROSHOWER Design

*PSHWD100,120 Provided only combined with Proshower Base L.

**PSHWD 60 Provided only combined with Proshower Base Basic.

Code	W x D (mm)	Qty
PSHWD 60**	600 x 80	1
PSHWD 70	700 x 80	1
PSHWD 80	800 x 80	1
PSHWD 90	900 x 80	1
PSHWD 100*	1000 x 80	1
PSHWD 120*	1200 x 80	1

Drain Reduction


Polypropylene



50-40mm



Code	Qty
PSHWRD 5040	1

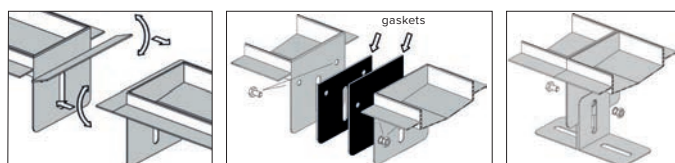Modular Assembly Kit

Code	Qty
PSHWRD	1





Proshower Panel CENTRAL



Moulded Polystyrene
with glued Profoil



2% Incline




Code	Qty
PSHPANC	1

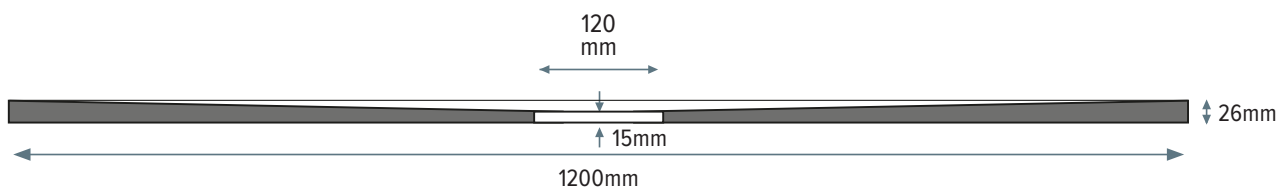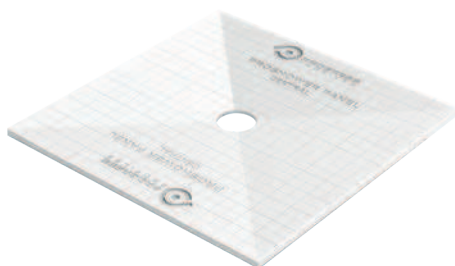

Proshower Drain Lateral Kit

Two central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double sided ring for fixing the waterproof section and a protection cap with template function.

Code	Qty
PSHLDK	1

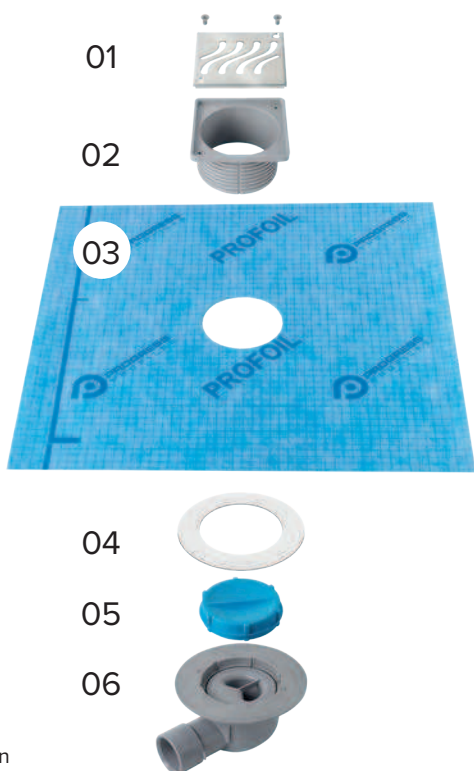


- 01. Grill
- 02. Grill Holder
- 03. Profoil Section
- 04. Double-Sided Ring
- 05. Cap / Template
- 06. Syphon

Proshower Drain Central Pro

Low thickness drain for floor level showers.

Code	Qty
PSHWCP	1

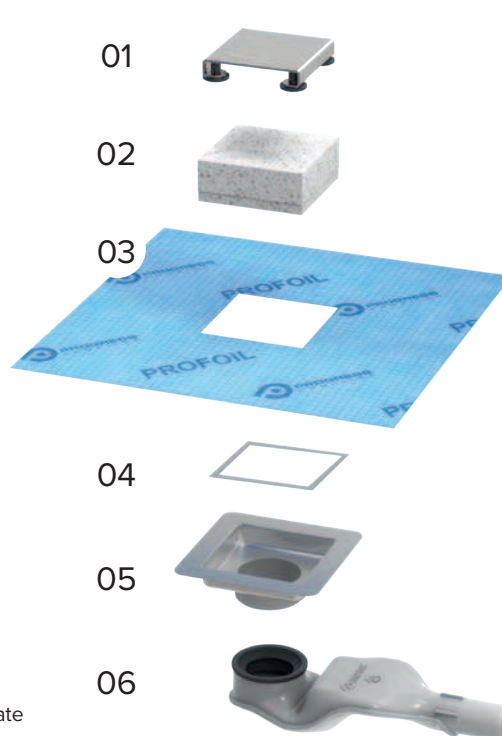

- 01. Grill
- 02. Template
- 03. Profoil Section
- 04. Double-Sided Tape
- 05. Shower Channel
- 06. Syphon



Accessories



Proband 150



Code	W (mm)	L Roll (m)	Roll / Pack
PRBPE 1530	150	30	6

Proband Fix




Code	Description	Qty
PRBFXB	Cartridges - WHITE	12

Profoil Pro



Code	Description
PFLOPR 0430	Profoil Pro Membrane

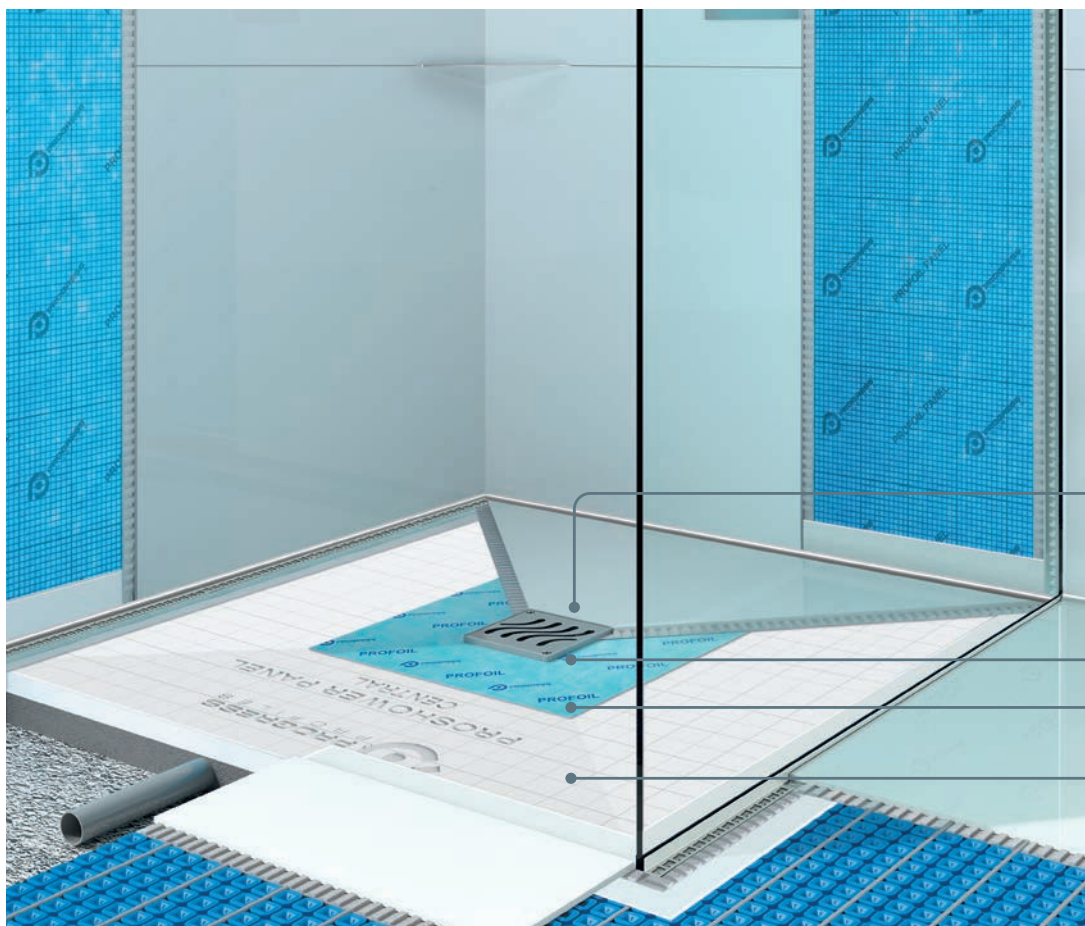Proshower
Drain GrillProshower
Drain Lateral

Profoil Section

Proshower
Panel Central



PRODESO® Drain 4 System

PRODESO® DRAIN 4 is a uncoupling membrane which creates an "air chamber" below the floor favoring the drainage of the water and the micro-ventilation. This "air chamber" guarantees a fast and smooth drying of the adhesive, even in case of large size tiles, and reduces significantly efflorescence formation and triacetate rising in joints. The uncoupling and vapour management properties of **PRODESO® DRAIN 4** guarantees the laying even in not perfectly cured supports. Easy and quick to install, **PRODESO® DRAIN 4** has an overall thickness of only 4 mm.



HDPE Polypropylene



25m



1m



4mm



Qty: 9



Code


PDES DR 251

Prodeso® Drain 4 Membrane

Polypropylene non-woven fabric

HDPE polyethylene sheet

Polypropylene spunbond

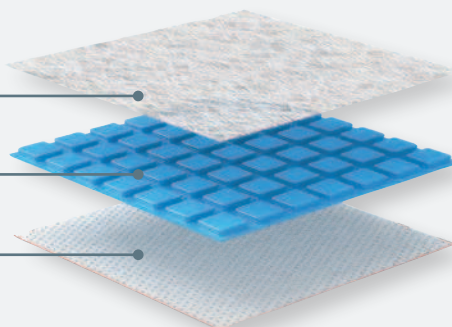

Accessories

PRODESO® Sound Tape

50m



Code


PDSNDTP 550

Qty


36




- 01. Large size tiles
- 02. Thin-set / adhesive
- 03. Prodeso® Drain 4 Membrane**
- 04. Thin-set / adhesive
- 05. Screed / plywood / OSB

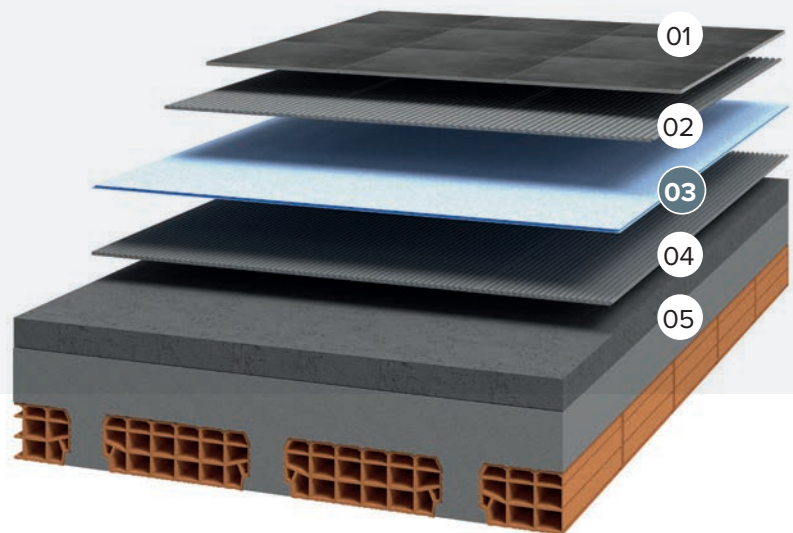


Product Functions




Decoupling
(Crack Bridging)




Vapour
Management




Drainage



Micro-Ventilation



Sound Reduction
15 db



Heating
Distribution



PRODESO® Drain 8 System

PRODESO® DRAIN 8 is a patented membrane for drainage, decoupling and waterproofing, with a total thickness of 8mm which can even be installed on not fully cured screeds. The “air chamber” below the flooring drains the infiltrated water below it. This helps a quick drying of the adhesive and effectively reduces the triacetates rising. The system is ideal for balconies and terraces, even with large format tiles, and is completed with a flexible band in polyethylene and polypropylene and a bi-component waterproof adhesive. Quick and easy to install, **PRODESO® DRAIN 8** is very versatile and guarantees long life for outdoor flooring.



HDPE Polypropylene



15m



1m



8mm



External



Qty: 8



Code

PDESDR 151

Prodeso® Drain 8 Membrane


Draining Polypropylene Fabric

Polyethylene Sheet

Non-Woven Polypropylene Fabric

Polypropylene Film

Non-Woven Polypropylene Fabric

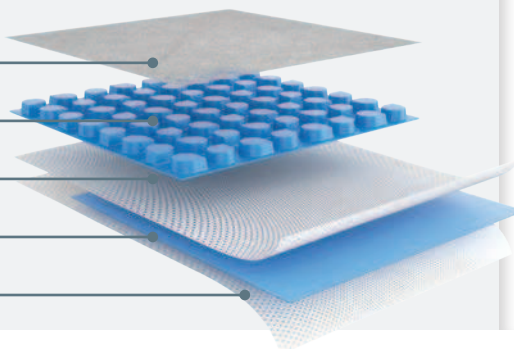

Accessories

PRODESO® Sound Tape



50m



Code

Qty

PDSNDTP 550

36

Proband 250



250m



0.42mm



Code

L Roll (m) Roll / Pack

PRBPE 2505 5 5

PRBPE 2530 30 3

Proband Koll AB



15kg




Code

Qty

PRBKLAB

27

Pre-formed Corners



120m



60mm



Code


Qty

PRBI Internal 10

PRBE External 10



Product Functions

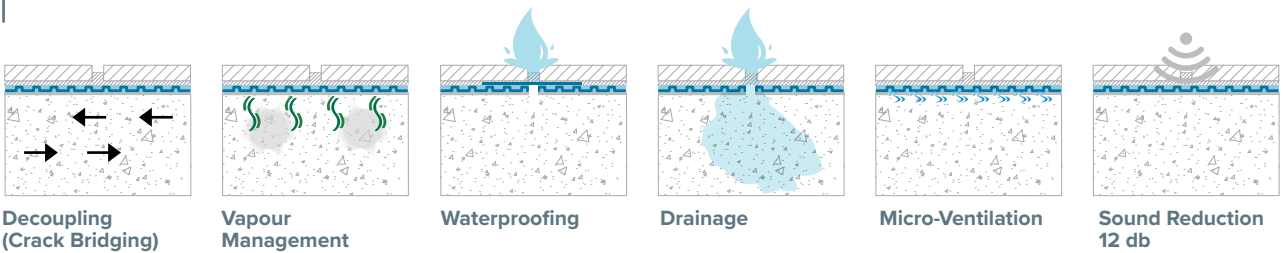



Montague Gardens, South Africa

Project Specifications

Products Specified: **NLD
Vision Single White System**

Sector: **Commercial**

Project Description

When a building contractor in Cape Town faced challenges sourcing the ideal LED-accommodating tile-in step profile for a showroom project in Montague Gardens, Tile and Floor Care (TFC), Genesis' trusted South African distributor, stepped in to provide the perfect solution.

After exploring multiple options without success, the contractor turned to TFC, who specified the NLD Vision Step Edge profile from Genesis, a sleek, functional solution designed to integrate LED lighting seamlessly into step edges.

A popular LED profile, the NLD Vision Step Edge was readily available in South Africa. This ensured quick access to stock and allowed TFC to meet the client's requirements efficiently, keeping the showroom project on schedule.

Genesis supported the process with comprehensive technical literature and installation guidance, including the Vision Brochure and detailed Technical Data Sheets for the NLD profile. These resources enabled precise, confident installation and ensured optimal performance of the finished result.

The outcome was a high-quality, visually striking, and safe step edge installation that perfectly complemented the modern showroom environment.

The client expressed complete satisfaction with the solution, praising the seamless integration, ease of installation, and timely delivery, showcasing how reliable local distribution and expert technical support can bring international product innovation to South African projects with ease.





vision

VISION



Genesis
The Perfect Finish

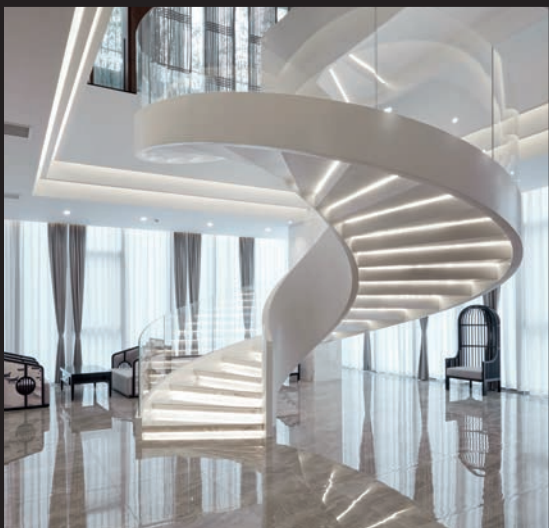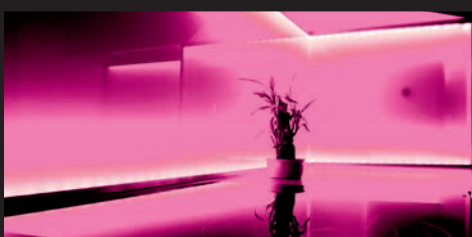

Choose between Vision LED and RGB options to find the right illumination for your project.

3 simple steps will help you know what you need...


1. Choose your lighting system




Natural White
(no remote control)



Natural White



White Moods
Warm / Natural / Cool



RGB

2. Select the driver



12V Drivers
(LDD)



LED Uni Drivers
(LUNDR)




CCT Uni Drivers
(LUNDR)



RGB Uni Drivers
(LUNDR)

3. Control options



Wall Switch



Single Zone
(LEDRAD)



Single Zone
(LCTRAD)



Single Zone
(LGBRAD)



Motion Sensor



Multi Zone or Smart
(LED..)



Multi Zone or Smart
(LCT..)



Multi Zone or Smart
(LGB..)

See on Page 94


See on Page 96

See on Page 98

See on Page 100



TRV Retro Self Adhesive

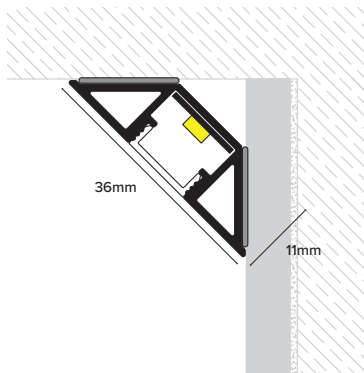

Aluminium



Angle




2.8m





Self-Adhesive



Code	Qty
TRV368.81	10

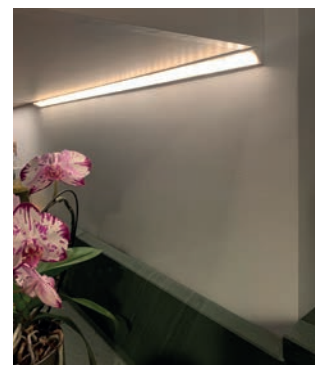

TPD 3mm Plaster Profile

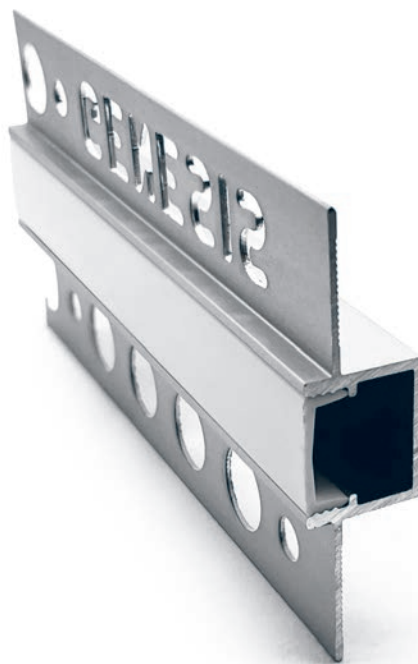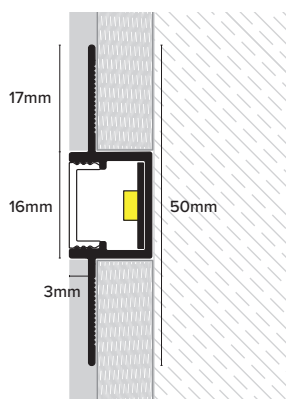

Aluminium



Square




2.8m



Code	Qty
TPD308.81	10


End Caps

Code	Qty
TUC100.81	10

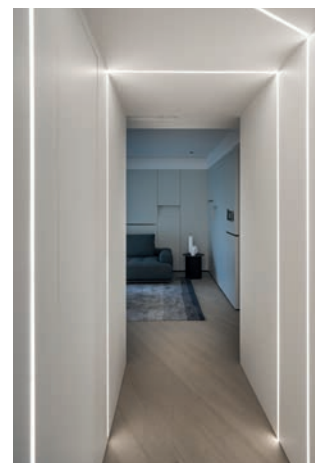



TLD MultiFix



Code	D (mm)	Qty
TLD108.81	10	10
TLD128.81	12	10

End Caps

Code	D (mm)	Qty
TUC100.81	10	10
TUC120.81	12	10


Aluminium



Square




2.8m

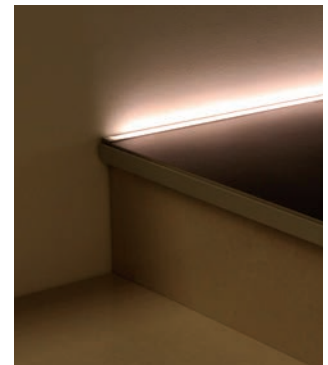

VISION

AIV Panel Inlay



Code	Qty
AIV124.17	10

Stainless Steel




Square



2.4m




Self-Adhesive

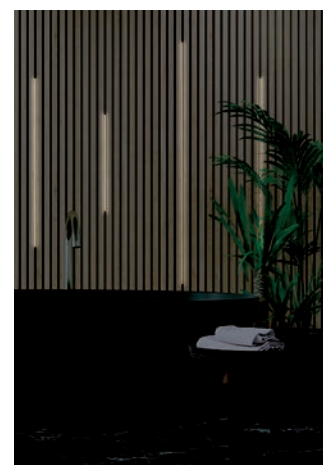



TUD Vision - Guidance System



Code	Qty
TUD118.81	10

End Caps

Code	Qty
TUC100.81	10


Aluminium




Square



2.8m

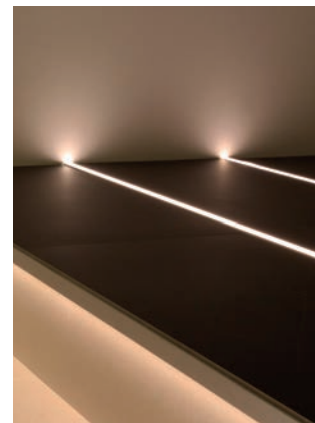

NLD Vision - Step



Code	D x X (mm)	Qty
NLD908.81	9 x 20	10
NLD118.81	11 x 22	10

End Caps

Code	Qty
NPC100.81	10


Aluminium



Step Edge





2.8m

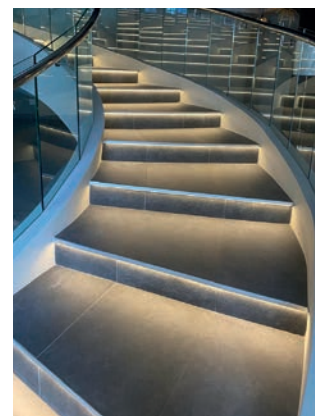



NALR & NSLR Vision - Light Down & Light Out

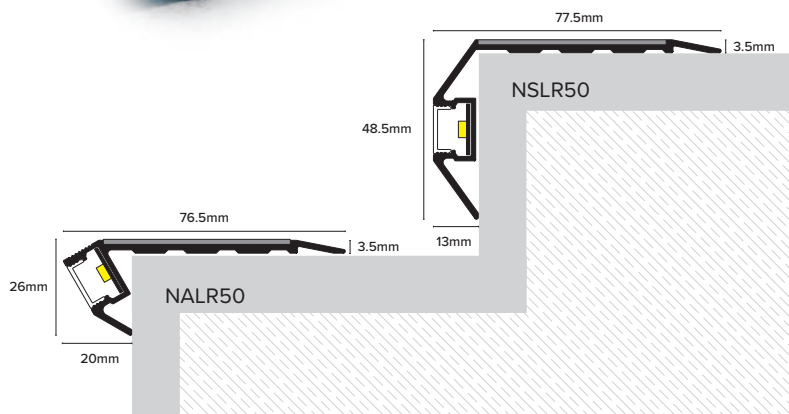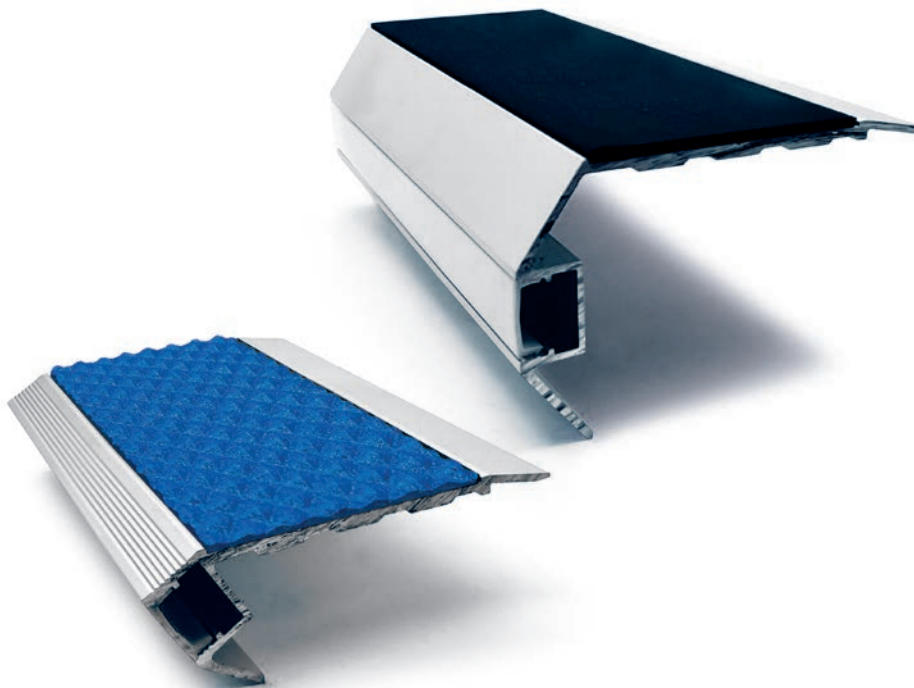

Code	Length (m)	Qty
NALR50	1	5
NALR508	2.8	5

Code	Length (m)	Qty
NSLR50	1	5
NSLR508	2.8	5

When ordering, please advise code using the following guide

Code + .Insert Colour

E.g. NSLR508.01 = NSLR Nosing in 2.8m length with White Insert

NALR50.16 = NALR Nosing cut to bespoke length with Black Insert

End Caps

Code	Qty
NECR50.81	10

End Caps

Code	Qty
NECS50.81	10

Aluminium



Nosing



Standard Insert

01 White LRV: 79.9	16 Black LRV: 4.5	20 Brown LRV: 9.1	25 Beige LRV: 41.1
27 Canvas LRV: 53.2	30 Red LRV: 10.6	43 Dolphin Grey LRV: 27.6	44 Ice Grey LRV: 42.1
46 Midnight Grey LRV: 12.8	47 Yellow LRV: 55.7	48 Cobalt Blue LRV: 9.2	58 Cloud LRV: 59
	68 Haze LRV: 66.2	78 Sand LRV: 70.3	

50mm


2mm

Tredsafe® Insert

601 White LRV: 49.9	616 Black LRV: 4.6	621 Safety Blue LRV: 10.8
643 Dolphin Grey LRV: 11.5	647 Yellow LRV: 48.1	


50mm

3.5mm

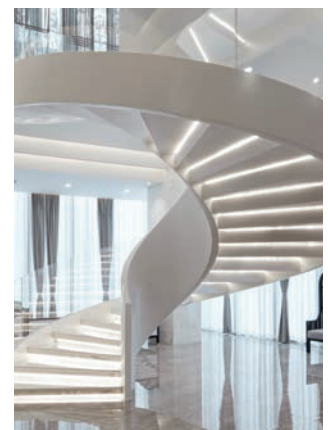



KLD Vision - Skirting

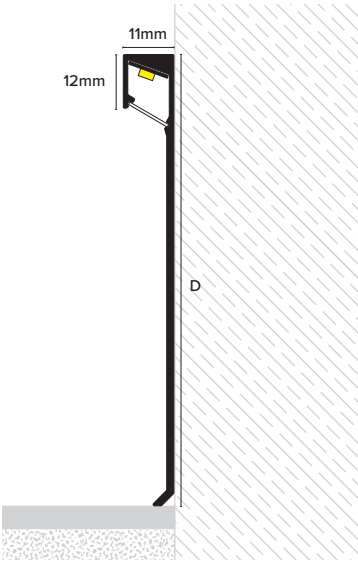

Code	D (mm)
KLD608.81 NEW	60
KLD118.81	100
KLD118.94	100

End Caps

Code
NPC100.81
NPC100.94



Aluminium



Skirting



2.8m



81

Matt Silver


94

Brushed Silver





KRD Vision - Universal LED Skirting

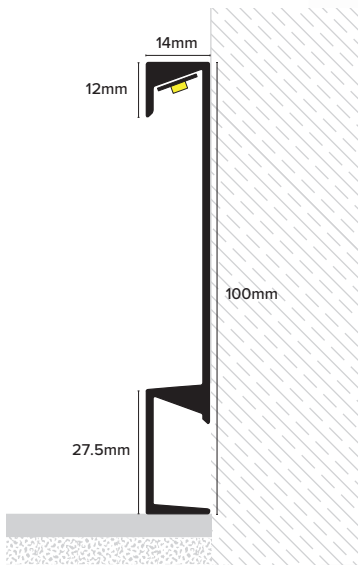

Code

KRD107.02

KRD107.17

KRD107.81

End Caps

Code

KDP100.02

KDP100.17

KDP100.81



Aluminium



Skirting



2.8m



02


Matt
White

17

Matt
Black


81

Matt
Silver

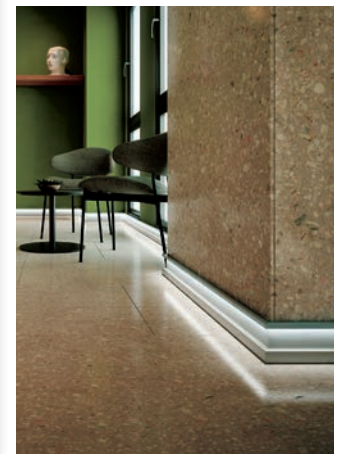

VISION

Dual Configurations

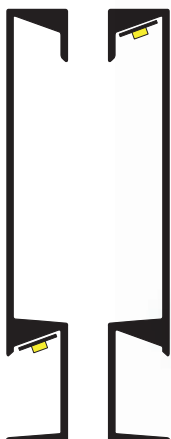



NEW

12 V



2m





COB



Natural White 4000K & Warm White 3000K

With an increased 480 LED's per metre (4 times its predecessor), 4.8W (Ambient) and 9.6W (Task) lighting options, the safety and security of 12V IP65 protection class as standard, plus 3M VHB pressure sensitive adhesive tape backing, this premium range of tapes is built to last, with a lifetime of around 40,000 hours.

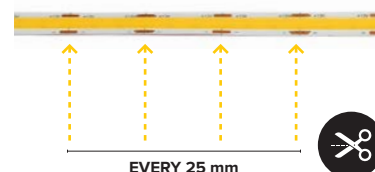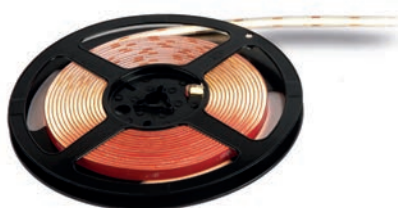

Natural

4.8 W



9.6 W



Warm

4.8 W



9.6 W



Code	Qty
LD12481.NW 1 M 1	
LD12482.NW 2 M 1	
LD12483.NW 3 M 1	
LD12484.NW 4 M 1	
LD12485.NW 5 M 1	

Code	Qty
LD12961.NW 1 M 1	
LD12962.NW 2 M 1	
LD12963.NW 3 M 1	
LD12964.NW 4 M 1	
LD12965.NW 5 M 1	

Code	Qty
LD12481.WW 1 M 1	
LD12482.WW 2 M 1	
LD12483.WW 3 M 1	
LD12484.WW 4 M 1	
LD12485.WW 5 M 1	

Code	Qty
LD12961.WW 1 M 1	
LD12962.WW 2 M 1	
LD12963.WW 3 M 1	
LD12964.WW 4 M 1	
LD12965.WW 5 M 1	

LED Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

Total Power (W) = Length of LED x Power Rating of LED (W)

Code	Ports	Qty
LDD008 8W	4	1
LDD30 30W	6	1
LDD050 50W	6	1
LDD100 100W	10	1
LDD180 180W	10	1



12 V



1m



Drivers have six ports, use LEDCON to add additional ports (1 x LEDCON = 9 ports, 2 x LEDCON = 12 ports)

For example:

5 metres of Vision 9.6W LED tape uses a total of 48W. This installation will need to use a driver with a rating of at least 50W. The perfect option would be our 50W LED driver LDD50.



Accessories

LED Extension



Code	Qty
LEDEXT	1

Additional Connector Block



Code	Qty
LEDCON	1

Butt COB Strip Connector




Code	Qty
LED-PL Power Connector c/w Micro Plug	1

Link Leads



Code	Qty
LEDLINK-50	1

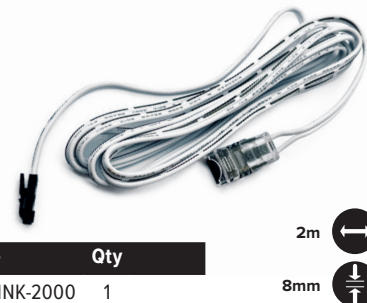

Code	Qty
LEDLINK-2000	1

PIR Motion Detector



Code	Qty
LMD-DR Driver powered	1



Code	Qty
LMD-PD Mains powered	1





NEW

12 V



2m





COB



Natural White 4000K & Warm White 3000K

With an increased 480 LED's per metre (4 times its predecessor), 4.8W (Ambient) and 9.6W (Task) lighting options, the safety and security of 12V IP65 protection class as standard, plus 3M VHB pressure sensitive adhesive tape backing, this premium range of tapes is built to last, with a lifetime of around 40,000 hours.

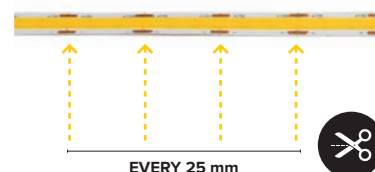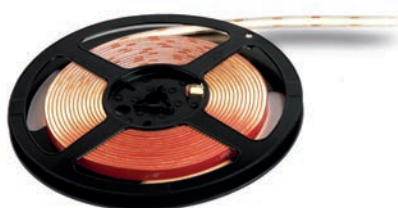

Natural

4.8 W



9.6 W



Code	Qty
LD12481.NW 1 M 1	
LD12482.NW 2 M 1	
LD12483.NW 3 M 1	
LD12484.NW 4 M 1	
LD12485.NW 5 M 1	

Code	Qty
LD12961.NW 1 M 1	
LD12962.NW 2 M 1	
LD12963.NW 3 M 1	
LD12964.NW 4 M 1	
LD12965.NW 5 M 1	



Warm

4.8 W



9.6 W



Code	Qty
LD12481.WW 1 M 1	
LD12482.WW 2 M 1	
LD12483.WW 3 M 1	
LD12484.WW 4 M 1	
LD12485.WW 5 M 1	

Code	Qty
LD12961.WW 1 M 1	
LD12962.WW 2 M 1	
LD12963.WW 3 M 1	
LD12964.WW 4 M 1	
LD12965.WW 5 M 1	

LED Uni Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

Total Power (W) = Length of LED x Power Rating of LED (W)

Code	Qty
LUNDR30 30W	1
LUNDR50 50W	1
LUNDR100 100W	1
LUNDR180 180W	1



12 V



1m



Drivers have six ports, use LEDCON to add additional ports (1 x LEDCON = 9 ports, 2 x LEDCON = 12 ports)

For example:

5 metres of Vision 9.6W LED tape uses a total of 48W. This installation will need to use a driver with a rating of at least 50W. The perfect option would be our 50W LED driver LDD50.



Single Zone Control

Vision compatible single zone remote control handset with dimmer, all you need is a driver (LUNDR Page 96).

Code	Qty
LEDRAD LED Remote Dimmer and Controller	1



Ports

4

Multi Zone or Smart Control

1 x driver and 1 x receiver required per independent zone.

Receiver is operated with either the remote (LEDREM) or your smart device



Ports

6

Voice Control



Smart Control



Code	Qty
LEDMZR Single White - LED Receiver - Max 288W	1



Code	Qty
LEDREM Single White - LED Remote - 30M Range	1

Accessories

Additional Connector Block



Code	Qty
LEDCON	1

Ports

4

LED Extension



Code	Qty
LEDEXT	1

2m

Butt COB Strip Connector



Code	Qty
LED-PL Power Connector c/w Micro Plug	1

8mm




Link Leads



50mm

8mm


Code	Qty
LEDLINK-50	1

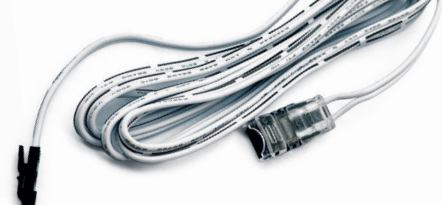

2m

8mm

Code	Qty
LEDLINK-2000	1

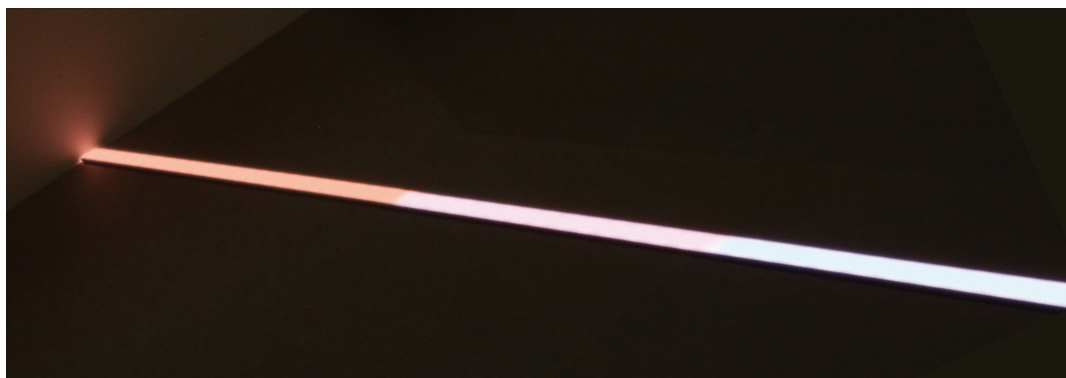

NEW

12 V



9.6 W



2m




COB





Multiple White

With an increased 608 LED's per metre (over 5 times its predecessor), 9.6W (Task) lighting, the safety and security of 12V IP65 protection class as standard, plus 3M VHB pressure sensitive adhesive tape backing, this premium range of tapes is built to last, with a lifetime of around 40,000 hours.



Code	Qty
LCT12961	1 M
LCT12962	2 M
LCT12963	3 M
LCT12964	4 M
LCT12965	5 M

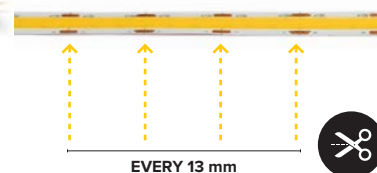

CCT Uni Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

**Total Power (W) = Length of LED
x Power Rating of LED (W)**

Code	Qty
LUNDR30	30W
LUNDR50	50W
LUNDR100	100W
LUNDR180	180W



12 V



1m





Single Zone Control

Vision is compatible with single and multi-zone remote control, all you need is a receiver and remote control handset.

Code	Qty
LCTRAD Multiple White - CCT Remote Dimmer and Controller	1



Multi Zone or Smart Control

1 x driver and 1 x receiver required per independent zone.

Receiver is operated with either the remote (LCTREM) or your smart device



Voice Control

Smart Control




Code	Qty
LCTMZR Multiple White - CCT Receiver - Max 720W	1

Code	Qty
LCTREM Multiple White - CCT Remote - 30M Range	1

CCT receivers have four ports, there is the capacity for 1 x LCTCON to be added to a receiver, resulting in a total of max 8 ports available.

Accessories

LED Extension

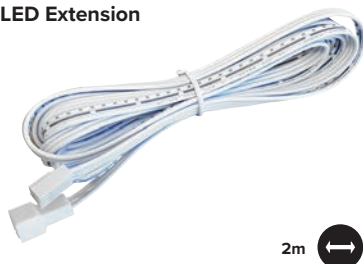


Code	Qty
LCTEXT	1

Additional Connector Block



Code	Qty
LCTCON	1

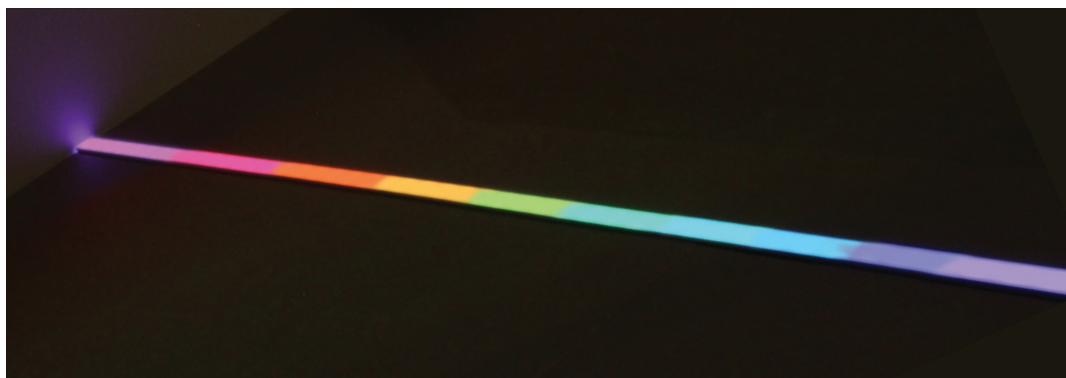

NEW

12 V



15 W



2m



COB





RGB Colour Spectrum

With an increased 810 LED's per metre (over 5 times its predecessor), 9.6W (Task) lighting, the safety and security of 12V IP65 protection class as standard, plus 3M VHB pressure sensitive adhesive tape backing, this premium range of tapes is built to last, with a lifetime of around 40,000 hours.



Code	Qty
LGB12141	1 M
LGB12142	2 M
LGB12143	3 M
LGB12144	4 M
LGB12145	5 M

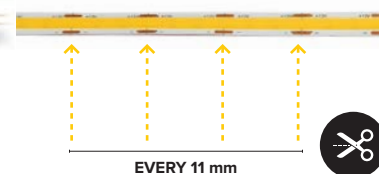

RGB Uni Drivers

Selecting the right driver is easy – use the below formula to find the best option for your installation:

**Total Power (W) = Length of LED
x Power Rating of LED (W)**


Code	Qty
LUNDR30	30W
LUNDR50	50W
LUNDR100	100W
LUNDR180	180W



12 V



1m

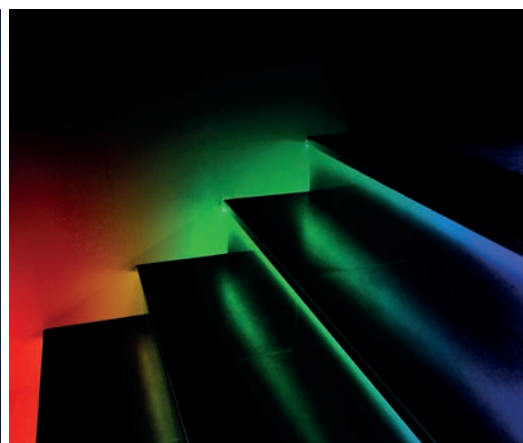



Single Zone Control

Vision is compatible with single and multi-zone remote control, all you need is a receiver and remote control handset.

Code	Qty
LGBRAD RGB - Remote Dimmer and Controller	1




Multi Zone or Smart Control

1 x driver and 1 x receiver required per independent zone.

Receiver is operated with either the remote (LGBREM) or your smart device



Code	Qty
LGBMZR RGB - Receiver - Max 720W	1




Code	Qty
LGBREM RGB - Remote - 30M Range	1

RGB receivers have four ports, there is the capacity for 1 x LGBCON to be added to a receiver, resulting in a total of max 8 ports available.

Accessories

LED Extension

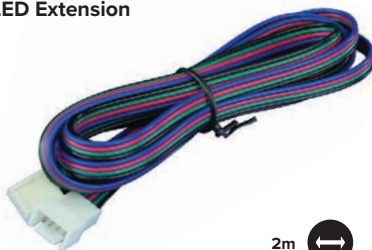

Code	Qty
LGBEXT	1

Additional Connector Block



Code	Qty
LGBCON	1



EyeLEDs

Natural White (4000K) EyeLEDs are an individual, recess mounted LED unit which can be used to accentuate your installation. Compatible with our standard LED drivers (LDD Page 94).

Cool (6000K) and Warm (3000K) White available on demand.

EyeLEDs are Ø30mm, 12V, IP65 0.4W recess mounted with micro connectors.

Code

LDP1204.NW 4000K. 1 x EyeLED,
Driver required




12 V



EyeLED



Zones

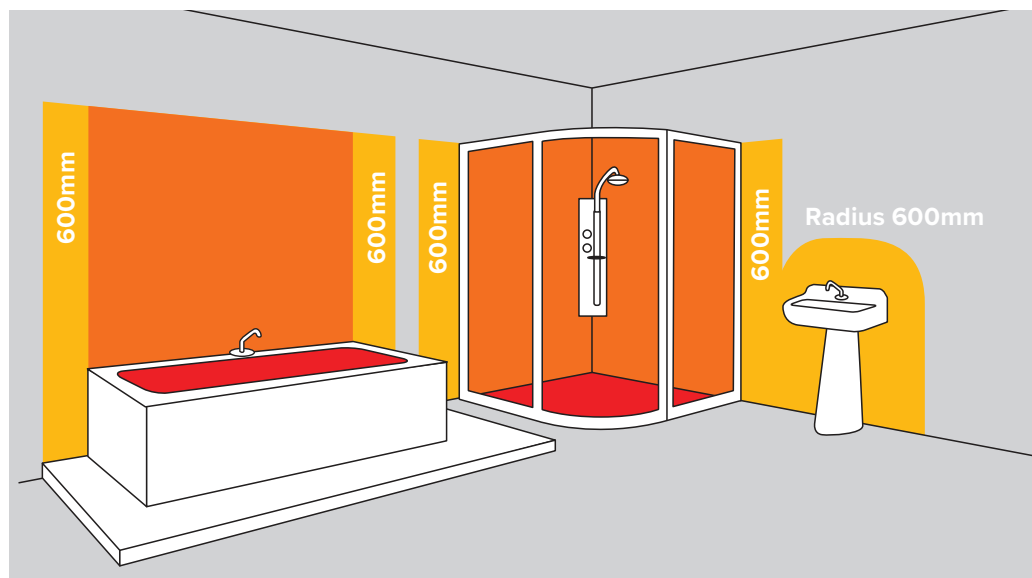

Zone



Zone



Zone



Zone 0 is IP67 and above
Zone 1 is IP64 plus
Zone 2 is IP64 plus

The tape should be at least 60cm from
water source due to the wires / leads.




Niche Kits

Ever increasing in popularity, an LED lit niche is now easier than ever to install in your bathroom.

Designed to accentuate a certain area with striking effect or simply to add a touch of class, the Vision Bathroom Niche Kit is comprised of the Genesis TLD profile, IP65 rated tape and the relevant remote and driver based on your needs.

Available in Single White, Multi White or RGB in 300mm and 600m lengths or alternatively as single white recess mounted EyeLEDs, the plug and play system allows for you to select the suitable option as an addition of ambient lighting to your environment.

Single white and EyeLED kits do not include a remote.

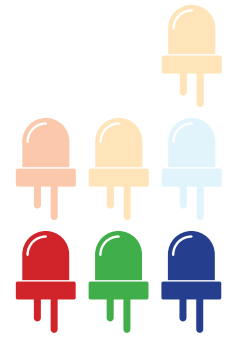

600mm



Code	Qty
TLD600-SWKIT Single White inc. driver	1
TLD600-MWKIT Multiple White inc. remote & driver	1
TLD600-RGBKIT RGB inc. remote & driver	1



300mm



Code	Qty
TLD300-SWKIT Single White inc. driver	1
TLD300-MWKIT Multiple White inc. remote & driver	1
TLD300-RGBKIT RGB inc. remote & driver	1



EyeLED



Code	Qty
LDP1204.NW1 EyeLED x 1 inc. Driver	1
LDP1204.NW2 EyeLED x 2 inc. Driver	1
LDP1204.NW3 EyeLED x 3 inc. Driver	1
LDP1204.NW4 EyeLED x 4 inc. Driver	1
LDP1204.NW5 EyeLED x 5 inc. Driver	1
LDP1204.NW6 EyeLED x 6 inc. Driver	1



Frequently Asked Questions

Q: What does LED stand for?

A: LED stands for Light Emitting Diode.

Q: What is an IP rating?

A: IP ratings are an indication of an electrical product's protection against solid objects such as dust and dirt and moisture. IP stands for ingress protection. The IP rating consists of two digits, the first number refers to the product's protection against solids, the second refers to its protection against liquids.

Q: What is RGB?

A: RGB simply stands for 'red, green and blue'. An RGB LED product has the ability to combine these three colours to produce over 16 million hues of coloured light.

Q: Can I cut the LED / RGB strip at any point?

A: The tapes can be cut at the intervals indicated by the copper strips which are quoted on the product pages.

Q: Do you offer a bespoke service and if so what do I need to provide?

A: Yes we do, just send details of the installation area, quantity of LED required and the effect you are trying to achieve.

Q: Do you offer alternative voltages?

A: Yes, our standard drivers work on an input voltage of 200-240v but we can supply 110v rated drivers if required.

Q: What is the life span of LED?

A: Our LED strips have an average lifespan of 40,000 hours

Q: Can I replace my LED lights?

A: The LEDs have a lifetime of around 40,000 hours. Under normal operating conditions, replacement will not be necessary but is possible if required. Should you need to replace your LED lights we recommend you consult a qualified electrician to perform the modification.

Q: Do I require an Electrician to complete the installation?

A: Yes, Wiring is against the law in the UK unless you are a qualified electrician.

Q: What is the specification of the wiring used in your LED system?

A: The wiring is 2192Y 0.75mm.

Q: Can I wire the lights to a standard light switch or dimmer switch?

A: Yes, we recommend you consult a qualified electrician to assist with the installation.

Q: Can I add more zones of LED at a later date?

A: Yes, providing you are using a system which is compatible with multi-zone installation (eg. RGB), you can add or amend lighting zones using the remote control handset.

Q: Can I use my own LED system with the Genesis profiles?

A: Yes, but we recommend you follow our specification to achieve the optimal results.

Q: I have a single staircase with 20 steps @1m of CCT, each driver can only accept 4 LED's due to the number of micro ports so I will need 5 drivers. The catalogue states that it is one receiver per driver but I want this staircase to be all ZONE 1, Can you have 5 receivers all programmed to 1 zone?

A: Yes, it is one receiver per driver but up to eight receivers can be programmed to the same zone on the same remote as long as you use the multi-zone remote and receivers.

Q: Is a dedicated power lead required for each driver?

A: No, multiple drivers can be wired to a single power lead if required, a qualified electrician will be able to advise further.

Q: Is it possible to increase the number of connect ports supplied with each driver?

A: Yes, we offer Connector Block Extensions which provide an additional four ports if required, however, there is a maximum number of extensions that can be added, as quoted on the product pages. The power limit of the driver is not affected by this adaptation, so wattage restrictions must still be observed.


Q: What is the length of the power cable on the products?

A: There is 1 metre of power cabling on all drivers (Standard LED, Uni, and 110V), 2 metre of power cabling on all tape (LED, CCT, RGB and COB), and 3 metre of power cabling on the EyeLEDs

Tools



Genesis
The Perfect Finish

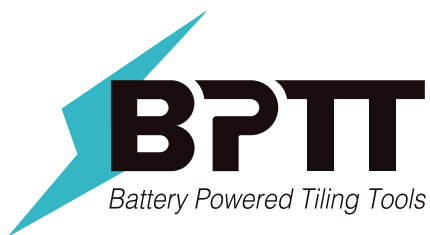

Unified

Smart Vibration Tile Beater

- Continuously variable transmission speed
- 45kg lifting capacity suction cup
- Level bubble
- Anti-vibration auxiliary handle
- TPR grip for maximum comfort

Code	Qty
BU-LFTBS	1

See full product description
on Page 152



Mixer

- 2 load speeds
200-350rpm, 350-650rpm
- Quick assembly mixing paddle
- Mixing Volume: 30 litres
- Brushless motor
- Soft start
- Constant power
- Overload protection

Code	Qty
BU-MMFB21	1

Adapter / Battery not included

See full product description
on Page 146



Pro+ 170 Vacuum Suction Cup

- Smart sensor monitor maintains optimum suction
- Compatible with almost any surface
- Double layer rubber suction pad for smooth surface usage
- Additional suction pad specifically for textured surface
- Digital and manual pressure gauge

Code	Qty
BU-LFBSL	1

See full product
description on
Page 149



Performance



Code	Qty
BU-BP21-BAT2.0	1



Code	Qty
BU-BP21-BAT4.0	1

Adapter - use with multiple brands

Code	Qty
BU-BPLT-ADP4	1



Work Light

- 5 level light adjustment (1,000 - 5,000 lumen)
- Integrated power bank for charging other devices
- Supplied with hanging hooks
- 360° rotate
- Robust compact design

Code	Qty
BU-BPLT40	1

Adapter / Battery not included

See full product description on Page 178



Cordless Angle Grinder

- Strong power, outstanding performance.
- High-efficiency brushless motor
- Constant speed control, efficiency improvement
- Efficient cutting, with a wider depth
- Dust-proof protection to extend service life
- Lightweight and portable, reducing burden

Code	Qty
BU-AGBLC5	1

See full product description on Page 125





Safety Gloves



- Size available in 9 / L, 10 / XL, 11 / XXL
- Provides excellent grip and movement when handling tile and stone
- Wear-resistant, stain-resistant, elasticated, ventilated and comfortable

Code	Qty
BU-TGDL 9/L	20
BU-TGD 10/XL	20
BU-TGDXXL 11/XXL	20



- Disposable Nitrile Gloves
- Material: Nitrile Rubber
- Weight: 5g/piece
- Frosted texture added to fingertips



100 pcs / pack

Code	Qty
BU-FTPGNL 9/L	10
BU-FTPGNXL 10/XL	10

Masks



10 pcs / pack

Design One-way ABS Valve and four-point adjustable headband**Protection Class** FFP3**Material (Outer / Middle / Inner)**30g/m² PP+100g/m² Polyester

P-3 Melt Blown

120g/m² Polyester

Code	Qty
BU-FTPRP3	12



20 pcs / pack

Design ABS Breathing Valve and four-point ultrasonic welded headband**Protection Class** FFP2**Material (Outer / Middle / Inner)**30g/m² PP40g/m² Melt Blown120g/m² Polyester

Code	Qty
BU-FTPMP2	12

Safety Glasses

- Lens: PC, optical grade 1
- Temple material: PC
- Anti-scratch coating, anti-fog
- UV resistant

Code	Qty
BU-FTPSG1	1





Bluetooth Ear Defenders

SNR 31 dB [EN 352-1:2020] [H-35 (dB) M-28 (dB) L-21 (dB)]

Bluetooth 5.4

Radio DAB + FM

Certification CE, RoHS, FCC, WEEE

Material PU and Foam Headband and Ear Defenders with an ABS shell

Contents Ear defenders, charging cable, audio cable, manual and leather bag.

NEW

Approx. 50
hours

**BIHUI**

Code	Qty
BU-FTPEMB	20



Ear Defenders

NEW**BIHUI**

SNR 33dB

Material PU and Foam Headband and Ear Defenders with an ABS shell



Code	Qty
BU-FTPEMP	20

NEW**BIHUI**

- Head-mounted foam earplugs
- SNR 27dB
- Material: PU foam and PP headband;

Code	Qty
BU-FTPEPB	50

XL Knee Pads

- Premium grade neoprene
- Heavy duty closed cell foam cushion
- Soft, broad, Velcro front fastening strap
- Washable and durable

Code	Qty
BU-BLKP	12

**BIHUI**

Neoprene Leatherette





Dust Door

- Prevents dust and scents during decoration
- Large comfort pull tabs
- Fast and easy setup
- Reusable

**NEW**

217cm



115cm

**BIHUI**

Code	Qty
BU-DCSDDC	5



Code	Qty
BU-DCSDDM	5



Floor / Carpet Protector

- 50 micron PE plastic
- Quick and easy to install
- Perfect for protection when painting / decorating
- Ideal for high traffic areas



700mm



25m



Self-Adhesive

**BIHUI**

Code	Qty
BU-FTCP700 Carpet Protector	16
BU-FTFP700 Floor Protector	16



Cloth Tape

NEW

- Paint and water resistant
- Suitable for tiles, porcelain and other materials



Polyethylene



Self-Adhesive



50mm



25m



Code	Qty
BU-DCSMTP	10

Masking Tape

NEW

- Paint resistant
- Writable
- Suitable for tiles, porcelain and other materials



Self-Adhesive



40mm



25m



Code	Qty
BU-DCSMSK	10

Protective Waterproof Fiber

NEW

A multi-layered, multi-use and reusable protection mat for your job site.

- Resistant
- Waterproof
- Anti slip
- Easily applied/Time saving
- No tape needed

Code	Qty
BU-DCSPFW	1

1m



25m



Self-Adhesive





Dust Extraction System for Grinding Wheels

- Suitable for 100mm-125mm
- Universal connectors for angle grinders
- Quick release lock
- Fast evacuation of dust
- Rubber adapter for vacuum cleaner
- Movable guide for grinding up to walls



125mm


BIHUI

Code	Qty
BU-DCWDE5	5

Dust Extraction for Mixing Buckets

- Compatible with most vacuum cleaners
- Fast extraction for reduced dust
- Quick clamp
- Suitable for buckets up to 35mm thick


BIHUI

Code	Qty
BU-TDBM	20

Ronda Vacuum Cleaner

For use in addition to a single brush, a resurfacer, a floor sander, etc, this product can be used with or without a bag. Not suitable for liquids.

- Portable power socket with automatic start
- Unclogging of the filter by lever
- Multi-tube HEPA cartridge filter (H class) dust >0.3 µm (asbestos, lead)
- Mounted directly in the tank
- Teflon coated tubes
- Standard EN60335-2-69

Accessories Included:

- Ø 40 mm: 1 flexible 4 m
- 3 extension tubes
- 1 circular brush
- 1370 mm floor nozzle with brush and casters
- 1 flat nozzle
- 1 furniture nozzle with adapter



230 V



1200 W



15 kg



Dry



Class


ROMUS

Code	Qty
R93985	1



H-class Auto Clean W/D HEPA Vacuum

NEW**230 V****1200 W****38 kg****Wet & Dry****Class****BIHUI**

1. Automatic Clean:
The innovated auto clean system ensure the vacuum works at high suction all the time without clogging.provides a continuous use mode.
2. Equipped with 2 HEPA filters:stops 99.5%of fine dusts at 0.3 um.
3. Wet and dry for liquids and dry solids extraction both.
4. Power socket for power tool 1200(w) use activates automatically on start/shut-down of the vacuum cleaner.
5. Suction power control for adapted suction performance.
6. Automatic trailing mechanism for emptying the suction hose completely.
7. Large and robust wheels and castors built to withstand the tough construction.

Code	Qty
BU-VCB38	1

Spare Parts



Code	Qty
BU-VCB38-07 Dust bag	20



Code	Qty
BU-VCB38-01 4M Antistatic Hose	6



Code	Qty
BU-VCB38-02 Floor Brush	10



Code	Qty
BU-VCB38-03 Handle	20



Code	Qty
BU-VCB38-04 Wand 2 pcs	20



Code	Qty
BU-VCB38-05 Crevice Tool	20



Code	Qty
BU-VCB38-06 Adapter	20



Bench Master



200




Suitable for cutting,
drilling and polishing jobs
as well as transportation.

- All in one design
- Foldable legs
- Transport wheels
- Carry handle
- Height adjustment
- Work as a table or trolley
- Open: 1070 x 440 x 760mm
- Table: 800 x 400mm

Code	Qty
BU-TWTMST	1

Folding Work Stand Table

NEW

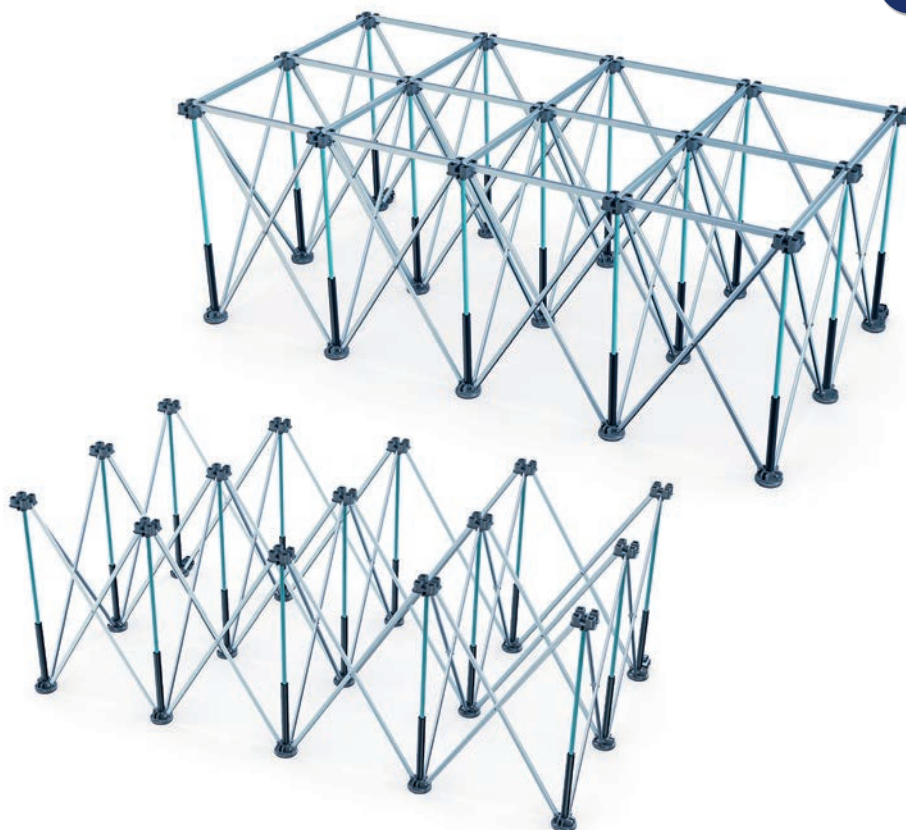

1100mm



2100mm

Connection
Rails

12

500



- Easy storage with belt and tool bag
- Multi-function plastic top plate for rails, wooden board etc.
- Can be extended with hook for storage cutting rails etc.
- Height-adjustable legs with two transport wheels
- Open: 2100 x 1100 x 750mm
- Folded: 440 x 310 x 990mm

Code	Qty
BU-LFFB	1

Rails 20 x 20 x 507mm

Code	Qty
BU-LFFB-CB	12





Levelling Compound Mixing Station

- Mixes up to 90kg with hands free
- Ergonomic handle and damping structure angles for pouring
- Removable 1900W mixing machine and large paddle
- Brake transporting castors and light weight frame
- Arc-shaped pouring spout and dust cover plate
- Suitable for mixing self-levelling cement, compounds & epoxies with good fluidity

Code	Qty
BU-MS1900	1

**Mixing Paddle**

Code	Qty
BU-MS1900-MP	2

**Mixing Bucket**

Code	Qty
BU-MS1900-B	25

230 V




1900 W



90 kg



Max. 650 RPM

**BIHUI**

Mixing Station

Improve the mixing quality of your levelling compounds: the two separate helixes of the special stir mixer are angled in order to create a vortex drawing the material down into the bucket, the ultimate mixing.

Code	Qty
R95725	1



75 L



M14

**ROMUS**



Concrete Grinder

- Suitable for materials like tile, concrete, etching, tile adhesive, natural stone, plaster, paint, coating, adhesive carpet etc.
- Self-cleaning design, equipped with professional vacuum cleaner interface, can be used in vacuum bag or vacuum cleaner. Use in conjunction with Class M or H vacuum for completely dust free operation.
- Ergonomic design characterised by increased balance and flatness.
- Removable magnetic front protective cover convenient for grinding up to walls.
- Power-off & overloading protections, and speed regulation.
- Full wave electronics, soft start, and with a start-current limit function.
- Comfortable operation, reducing labour intensity.
- Removing old surfaces as well as preparing a new base for secondary renovation.

Code		Qty
BU-CG1900	Concrete Grinder	1
BU-CGWS19	Adjustable stand with 2.5m cable	1



Shown with optional stand (BU-CGWS19)

1900 W



Ø 180mm



BIHUI

Spare Parts

Switch (XBCG1900-12)
Screw M8X30 (XBCG1900-16)
Spring Washer (XBCG1900-17)
Flat Washer (XBCG1900-18)
Shaft Sleeve (XBCG1900-20)
Dust Brush (XBCG1900-2526)
Dust Cover (XBCG1900-29)
Cover Plate (XBCG1900-31)
Carbon Brush Cover (XBCG1900-59)
Carbon Brush (XBCG1900-60)
Top Cover (XBCG1900-64)



Supplied BU-CG1900-SW

Concrete Floor Grinder

The all-new Floor Grinder has been developed to offer an increased user experience, improvements include enhanced structural elasticity, a modified weight for superior balance, repositioned and redesigned soft handled design offering anti-vibration and noise reduction, and optimum heat dissipation available due to larger cooling holes.

- Suitable for materials like tile, concrete, etching, tile adhesive, natural stone, plaster, paint, coating, adhesive carpet etc.
- Featured with power-off & overloading protections, and speed regulation
- Full wave electronics, soft start, and with a start-current limit function
- Removing old surfaces as well as preparing a new base for secondary renovation

Code		Qty
BU-CG2000	Concrete Grinder	1



Supplied BU-CG1900-SW

230 V



2000 W



Ø 180mm



Max. 3000 RPM



BIHUI

Spare Parts

Carbon Brush (XBCG2000-10)
Brush Grip (XBCG2000-11)
Axl Sleeve (XBCG2000-48)
Flat Gasket (XBCG2000-51)
Hexagonal Socket Screw (XBCG2000-52)
Brush Ring (XBCG2000-67)



Concrete Grinder Cup Wheels

180mm



- Ideal for grinding, smoothing and removing coatings from concrete, stone masonry and other construction materials.
- Engineered with dust extraction holes to improve airflow, enhance efficiency and reduce wear.

Dual-Row

- Double row design for aggressive and fast material removal as well as surface preparation



Code	Qty
BU-CG1900-SW	5

Turbo

- Spiral turbo design for aggressive and fast material removal as well as surface preparation



Code	Qty
BU-DCWT7	5

Fan

- Diamond tipped arrow-shape is ideal for preparing rough surfaces
- Coarse grit allows for aggressive grinding
- Allows for quick surface removal
- Concrete, cement, and other harsh surfaces



Code	Qty
BU-DCWF7	5

Epoxy & Glue Grinding

- Spiked diamonds for aggressive and fast material removal as well as surface preparation
- Reinforced compound technology with high durability against impact and abrasion



Code	Qty
BU-DCWG7	5

Angle Grinder Cup Wheels

125mm

**For use with BU-AG1200 / BU-AGBLC5 (page 125)**

- Ideal for bevelling, smoothing and sharpening
- Provides a quality finish from rough surfaces
- Durability provides consistent surface preparation
- Granite, concrete and other masonry materials



Code	Qty
BU-DCWD5	5

- Suitable for both rough surface removal and refined finishing
- Allows for quick surface removal
- Durability provides consistent surface preparation
- Concrete, ceramic and masonry materials



Code	Qty
BU-DCWT5	5

- Ideal for first cut surface preparation
- Fast acting angled blocks provide a refined finish
- Durability provides consistent surface preparation
- Concrete, cement and paint



Code	Qty
BU-DCWF5	5

- Lightweight and flexible usage
- For removal of thinner coatings or rust
- Surface removal by digging and tearing coating rather than grinding surface down
- Epoxy, paint, waterproofing membrane, glues and adhesives



Code	Qty
BU-DCWG5	5

**BS5 Floor Stripper**

- For stripping:
 - PVC tiles
 - Carpet tiles (with bituminous glue)
 - Needle felt carpet
 - Homogeneous PVC
 - Linoleum
 - Floor coverings with backing on concrete base
 - Foam and glue residues
 - Levelling compound residues
- Anti-vibration handle "T"
- Adjustable telescopic handle
- Rubber cushion
- ON/OFF switch located on the handle and carrying wheels
- All accessories included

Supplied with:

- 1 Flat blade 210 mm thickness 1.8 mm
- 1 "U" blade 230 mm thickness
- 2 mm polished tempered steel blades (hardness: 170 kg/mm²)
- 10 m extension cable
- 1 pair ear muffs.

Code	Qty
R94563	1



230 V



2200 W




Handle



Foam Grip


**ROMUS®****Blades**

1.8mm



Code	Qty
R94541	1

1mm



Code	Qty
R94542	1



Code	Qty
R94543	1

Spike Shoes

Replaces R94256

Code	Qty
BU-FTSK25	1

25mm

**Spike Sliders****NEW**

Accessories:
4 sets of nails
1 wrench

Code	Qty
BU-FTSKM UK: 7-9.5	1
BU-FTSKL UK: 8.5-11	1
BU-FTSKXL UK: 11.5-17	1

20mm





Compound Rake



Code	Qty
R94290	1


NEW

Code	Qty
R94280	1

Blades (For R94290)

Blades are individually 280mm, a pair is required for the length of the rake.

Code	Qty
R94294 C1	2
R94296 C2	2

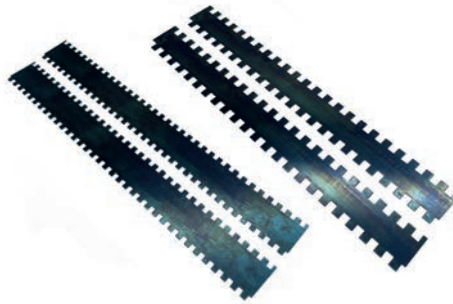

560mm

**ROMUS®**

R94280 Blade



C1



C2

Tri-Roll Roller

For applying self-levelling compounds (paints, resin epoxy) at 15 or 5 mm thickness (depending on mounted discs).

For handle see Art No.: 710 (above)



Code	Qty
R94599	1

505mm

**ROMUS®**

Spike Rollers

Spiked Rollers for use with epoxy resin coatings and cementitious floor screeds to remove trapped air bubbles in the floor coating. Ideally weighted and designed for a smooth gliding action with integral splash guard for all models.

For handle see Art No.: 710 (above)



250mm



Code	Qty
R94241 11mm Spike	12
R94246 31mm Spike	18



500mm



Code	Qty
R94242 11mm Spike	6
R94243 21mm Spike	12
R94248 31mm Spike	6





Vi-D4 Moisture Indicator

Detects moisture up to 4 cm deep, even through tile floor.

The material assessed is not damaged.

A reliable 4 scale indicator suitable for a range of substrates.

Very easy to use: display of the moisture level.

Code	Qty
R93270	1



2 x AA



ROMUS®

SLC Height Gauge



Code	Qty
BU-MSLP100	1



100mm



100 pieces



Self-Adhesive



BIHUI®

Rectangular Grinding Stone

Code	Qty
R94350	1



Spare Stone

Code	Qty
R94351	1



200mm



100mm




35mm



ROMUS®



Multi-Function Scraper

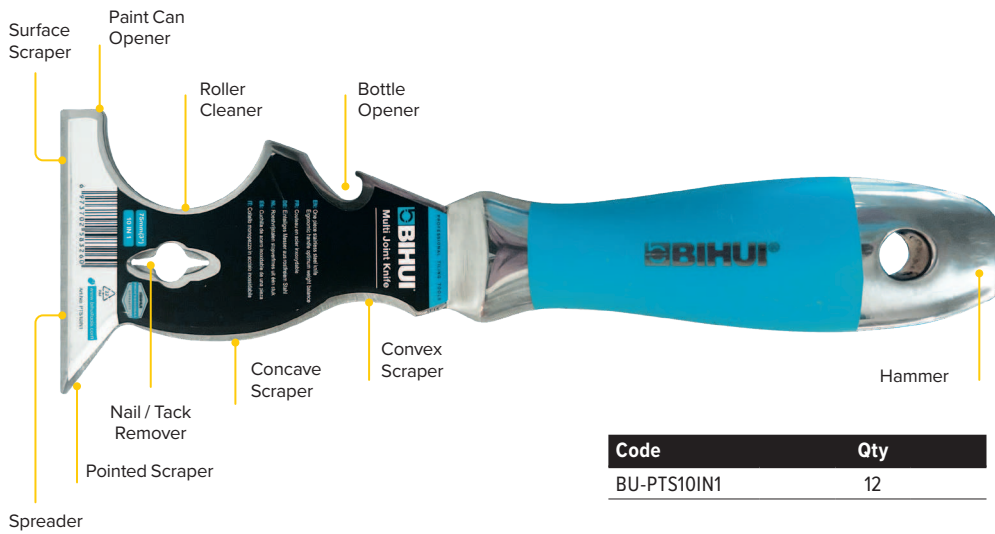

Code	Qty
BU-PTS10IN1	12

Stainless Steel



Functions

10



Tile Remover / Scraper



Replaces 920TR

Code	Qty
BU-TRSC4	12

Stainless Steel




TPR



Switchable Scraper

Code	Qty
BU-PTKSK6	1

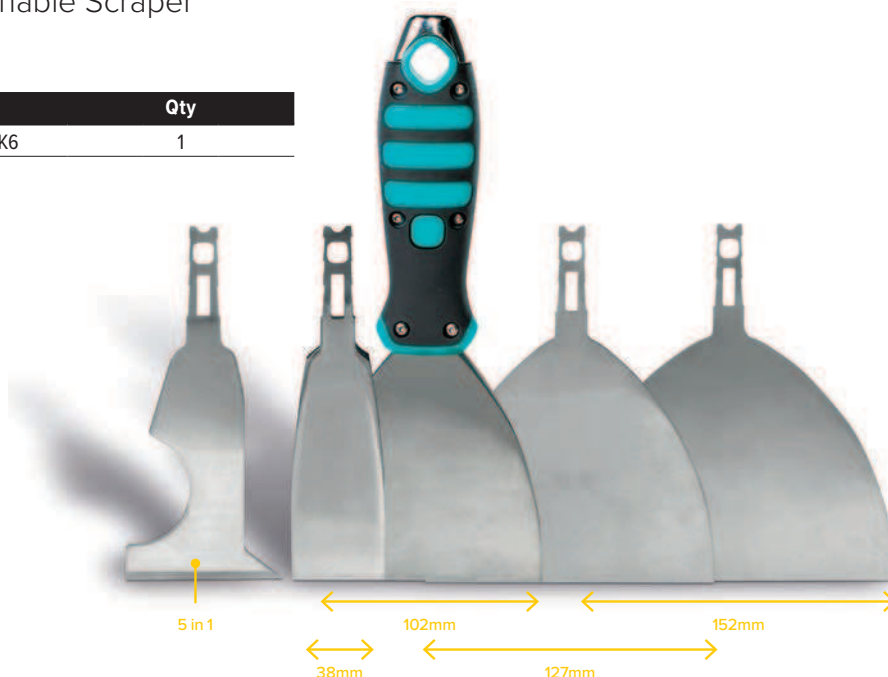

Stainless Steel



Blades

5





Heavy Duty Scraper

Code	Qty
BU-FTFR12	6

Code	Qty
BU-FTFR18	6

Blades

Code	Qty
BU-FTFRB4	10



Zinc



100mm



Cushion Grip

**BIHUI**

Big Scraper

For scraping off residual foam or adhesive after lifting of floor covering.

Code	Qty
R94325	1



Blades

Code	Qty
R92540	5



Chrome Steel



127mm



420mm



22mm

**ROMUS**

Scraper Pro

For scraping off residual foam or adhesive after stripping off floor covering.

Code	Qty
R94317	1



Blades

Code	Qty
R92520	10



Zinc



100mm



300mm

**ROMUS**



Mutt Scraper

Heavy duty scraper with sharpened blade for removing soft floor coverings and tiles.

Code	Qty
R94342	1



180mm



1.7mm

**ROMUS**®

Mega Scraper

For scraping off adhesive residues and foam backing.

For working in a standing position, limiting fatigue and protecting the knees.

Code	Qty
R94380	1



Blade

Code	Qty
R92530	5



200mm



99-175cm



Extendable

**ROMUS**®

**Cutting Rail**

Cutting rail for large format tiles compatible with BU-LFEC5 and BU-LFMC5.

Packed in a case, this 3 rail system has a cutting ability of up to 3.6m.

System includes:

3 x Aluminium Rails

4 x Suction Cups

2 x F Clamps

Code	Qty
BU-LFRS5	1

For use with BU-LFEC5 Electric Cutter and BU-LFMC5 Manual Cutting Head (below)


Electric Cutter

An electric dry cutter compatible with the cutting rail for large format tiles.

- Max. cutting depth 17mm (90°) and 15mm (45°)
- Max. cutting angle 45 degree
- Universal dust extraction

Code	Qty
BU-LFEC5	1

For use with BU-LFRS5 Cutting Rail (above)

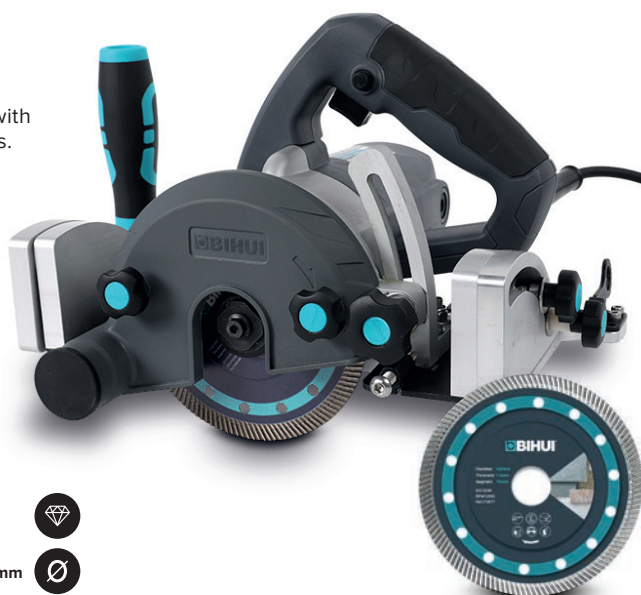

220 V



1500 W



13,000 RPM



Code	Qty
BU-DCBN5	1

125mm

**Manual Cutting Head**


A manual cutting head compatible with the cutting rail for large format tiles

- Spare wheel
- Max. cutting depth 15mm
- Break clamp device



Code	Qty
BU-LFMC5	1

For use with BU-LFRS5 Cutting Rail (above)

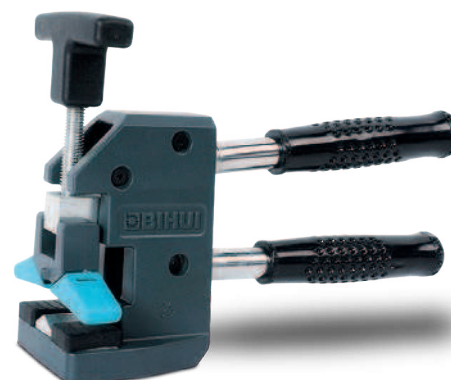Tile Breaker

Code	Qty
BU-LFTBH	20

Max. 15mm





Mitre Jolly Cutting System

Contains mitre cutting frame with BIHUI 5" angle grinder and edge cutting blade in 125mm

Code	Qty
BU-LFMBU	1



Max. 20mm

**BIHUI**

Cordless Angle Grinder

NEW

- Strong power, outstanding performance.
- High-efficiency brushless motor
- Constant speed control, efficiency improvement
- Efficient cutting, with a wider depth
- Dust-proof protection to extend service life
- Lightweight and portable, reducing burden



Code	Qty
BU-AGBLC5	1

BPTT Battery & Charger (not included)

Code		Qty
BU-BP21-CGK	Charger	1
BU-BP21-BAT2.0	Battery	1

230 V



1200 W



125mm



3000-11000 RPM



2.1 KG

**BPTT**
Battery Powered Tool**BIHUI**

Spare Parts

Lock Nut M14 (XBAGBLC5-19)

Angle Grinder

- 5" Variable Speed Angle Grinder with TPR handle
- With constant speed soft start
- Featured with polishing, drilling and grinding function
- Professional quality for trade
- IP20

Code	Qty
BU-AG1200	5



230 V



1200 W



125mm



3000-11000 RPM



2.1 KG

**BIHUI**

Spare Parts

Switch
(XBAG1200-43)Carbon Brush
(XBAG1200-38)Switch Push Rod
(XBAG1200-45)Guard
(XBAG1200-4)



	BU-DCBN115	BU-DCDC115	BU-DCDM115	BU-DCDT115	BU-DCAE125	BU-DCAE115
	●		●	●	●	●
	●	●	●	●		
	115mm	115mm	115mm	115mm	125mm	115mm
	1.2mm	1.2mm	1.4mm	1.2mm	1.4mm	1.4mm
	10	10	10	10	20	20
	9	9	9	9	10	10
Porcelain	●	●	●	<6mm	●	●
Ceramic	●	●	●		●	●
Granite						
Slate	●		●		●	●
Glass						
Natural Stone	●	●	●	●	●	●





Blades not suitable for grinding, bevelling or cutting curves.
See page 128 for blades suitable for these applications.



BU-DCAM125	BU-DCAM115	BU-DPD125	BU-DPD115	BU-DPG115	BU-DCAB125	BU-DCAB115
●	●	●	●	●	●	●
●	●			●	●	●
125mm	115mm	125mm	115mm	115mm	125mm	115mm
1.4mm	1.4mm	1.6mm	1.6mm	1.6mm	1.4mm	1.4mm
20	20	10	10	20	20	20
10	10	10	10	7	10	10
●	●	●	●	●	●	●
●	●	●	●	●	●	●
				●		
●	●	●	●		●	●
				●		
●	●	●	●	●		






Hot Pressed Grinding Diamond Blade

- 45 degree cutting
- Edge polishing
- Diamond height 24mm

Code	Qty
BU-DPE125	10

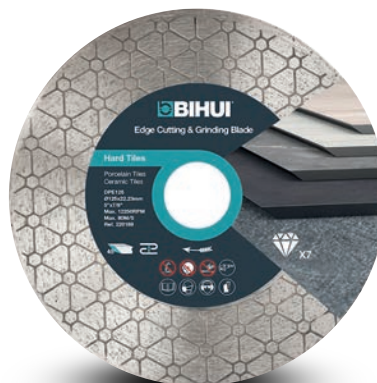

125mm



1.6mm




22.23mm

**BIHUI**

Multi Wheel

Brazed diamond cup wheel for cutting and grinding, suitable for cutting materials such as porcelain tiles, ceramic, marble, travertine, concrete etc.

Code	Qty
BU-DCWMM115	5

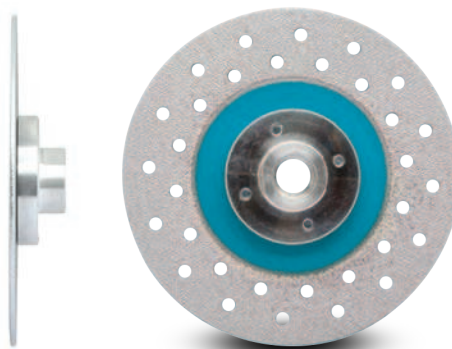

115mm



2.5mm



Medium Grit

**BIHUI**

Cutting & Grinding Wheel

Segmented small diamond blade for wet and dry cutting of natural stone and granite ceramics. The size makes it easy to access next to the wall, in tight spaces or for small adjustments and partial repairs.

Code		Qty
BU-DCW50	50mm	10
BU-DCW75	75mm	10




Cutting



M14

**BIHUI**

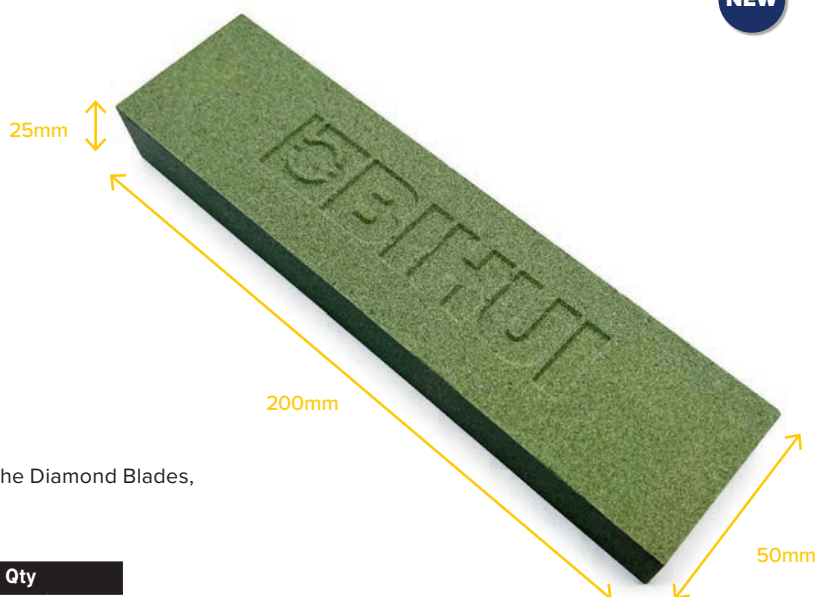**Dressing Stone****NEW**

Use to sharpen the Diamond Blades,
Hardness 85

Code	Qty
BU-DCBDSS	30

200mm



Grit 80#

**BIHUI****Mini Cordless Angle Grinder****NEW**

- Compact and ergonomic
- M5 thread spindle lock
- Suitable for 76mm Diamond Blades
- 15mm cutting depth

Code	Qty
BU-AGMN3M	50

Battery & Charger

Code		Qty
AGMN76-BAT	Battery	1
AGMN3M-CG31	3 in 1 charger	1



230 V



100 W



76mm

5000-15000
RPM**BIHUI**

Use for Porcelain
and Ceramic

1.2mm



Code	Qty
BU-AGMN76-BT	50




Use for Natural Stone,
Glass, Porcelain
and Ceramic

0.9mm



Code	Qty
BU-AGMN76-BC	50



Use for Porcelain
and Ceramic

1.1mm



Code	Qty
BU-AGMN76-BB	50



**Tile Design Angle Grinder Plus****NEW****230 V****100 W****Max. 50mm****5000-15000
RPM****BIHUI**

- Six speeds
- No-load maximum speed 15000rpm
- Main thread M5

Includes

2 x wrenches
1 x M5 to M6 adapter
1 x 3mm chuck
1 x M6 saw blade
fixing screw

1 x 6-angle wrench
1 x sintered blade
1 x vacuum blade
1 x polishing adaptor
1 x dry polishing pad
1 x 1.5mm pin

Code	Qty
BU-AGMN100-PLUS	1

Diamond Sintered Disc**NEW****BIHUI**

Code	Qty
BU-AGMBS45	20

50mm

Multifunctional Disc**NEW****BIHUI**

Code	Qty
BU-AGMBV50	20

45mm

Cooling System for Tile Design Angle Grinder**NEW****3.7 V****Hose 1.6m****2 L**


Code	Qty
BU-AGCS2L	1

BIHUI



Mini Polishing Pads

50mm




#50 Grit



Polishing



Code	Qty
BU-AGMPD1	20




#100 Grit



Polishing



Code	Qty
BU-AGMPD2	20



#200 Grit



Polishing



Code	Qty
BU-AGMPD3	20




#400 Grit



Polishing



Code	Qty
BU-AGMPD4	20




#50 Grit



Polishing



Code	Qty
BU-AGMPW1	20




#100 Grit



Polishing



Code	Qty
BU-AGMPW2	20




#200 Grit



Polishing



Code	Qty
BU-AGMPW3	20



#400 Grit



Polishing



Code	Qty
BU-AGMPW4	20



#60 Grit



Electroplated



Code	Qty
BU-AGMEP1	20



#120 Grit



Electroplated



Code	Qty
BU-AGMEP2	20




#200 Grit



Electroplated



Code	Qty
BU-AGMEP3	20



#400 Grit



Electroplated



Code	Qty
BU-AGMEP4	20



1.2mm



Grinding Rod

Code	Qty
BU-AGMGR12	40



1.5mm



Grinding Rod

Code	Qty
BU-AGMGR15	40



1.8mm



Grinding Rod

Code	Qty
BU-AGMGR18	40



3mm



Velcro Attachment

Code	Qty
BU-AGMPH2	10





Wise Power Cutters

NEW



- Extra wide double layer base
- Ergonomic handle
- Spring loaded support platform


Code		Qty
BU-TCW850	850mm	1
BU-TCW1300	1300mm	1
BU-TCW1600	1600mm	1

Scouring Wheel

Code	Qty
BU-TCS-SW	1



850mm
1300mm
1600mm



600 x 600mm
900 x 900mm
1130 x 1130mm

Max. 20mm




Ø22mm



BIHUI®

Manual Cutters with Laser

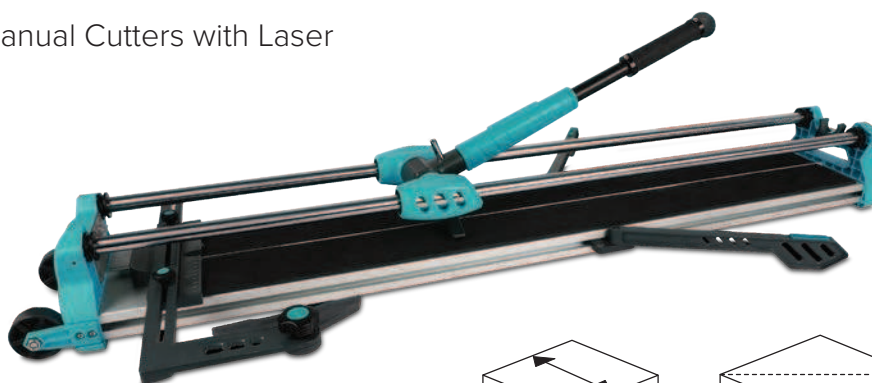


Code		Qty
BU-TCB600	600mm	1
BU-TCB800	800mm	1
BU-TCB1000	1000mm	1
BU-TCB1200	1200mm	1

Spare Cutting Wheel

Code	Qty
BU-TCBSW	1



600mm
800mm
1000mm
1200mm



424 x 424mm
560 x 560mm
700 x 700mm
850 x 850mm

Max. 18mm



Ø 22mm



BIHUI®

- Tungsten carbide scoring wheel with etched scale for using with different tile thickness
- Anti-rotation handle for change scoring wheels from Ø 6mm to Ø 22mm
- Ø 22mm scoring wheel included
- Magnetic absorption and fast release breaking device with 800kg breaking power for one-handed operation
- Adjustable measurement guide and side ruler for cutting tiles from different angle
- Anti-slip handle with storage function and snap-in for locking the handle
- LED light for extra vision
- Wheels for easier movement (BU-TCB1000 / BU-TCB1200 only)
- Suitable for cutting all kinds of ceramic tiles, polished tiles and glazed tiles





Incise Manual Cutters

NEW



Max. 18mm



Ø 12mm




BIHUI

- One piece, simple and durable single rail system
- Smart and easy adjusting knob
- Double row scale ruler

Code	Qty
BU-TCA400 400mm	1
BU-TCA750 750mm	1

Scouring Wheel

Code	Qty
BU-TCA-SW	1

400mm
750mm280 x 280mm
530 x 530mm

King Cutters

NEW



Max. 20mm



Ø 22mm





BIHUI

- Tungsten carbide cutting wheel
- Wide double layer base
- Cutting depth 6mm to 20mm
- Breaking Force – 1000KG

Code	Qty
BU-TCK850 850mm	1
BU-TCK1300 1300mm	1
BU-TCK1600 1600mm	1

Scouring Wheel

Code	Qty
BU-TCM-SW	1

850mm
1300mm
1600mm600 x 600mm
900 x 900mm
1130 x 1130mm



Automatic Multi-functional Cutting Machine




- Automatic operational mode available
- Laser line
- Foldable legs with built in wheels for transportation.
- Suitable for cutting ceramics, stoneware, porcelain and other materials

Code	Qty
BU-TCSA1200	1

Blades

Code	Ø (mm)	Usage	Qty
BU-DCBS120	120	Ceramic & Porcelain	10
BU-DCBS130	130	Ceramic & Porcelain	10
BU-TCSA1200-CB	130	Stone & Marble	20

Supplied with**BU-DCBS120****BU-TCSA1200-CB**

220 V



3000 W



850mm



1200mm



76



Max. 20mm



Cutting



10000 RPM

**BIHUI**



Start 2 Door & Skirting Trimmer

Cutting height and depth adjustment.
Very thin plate for cutting up to 5 mm above the floor.
The suction outlet can be adapted to the Vacrom vacuum cleaner.



Code	Qty
R93560	1

230 V

1500 W

Max. 50mm
Min. 5mm

5.5 KG

9500 RPM


ROMUS®

Flooring Cutter




Specifically developed for LVT.
For cutting soft and rigid LVT, laminate, carpet, PVC and rubber tiles.
Long handle which increases cutting force, removable for transport.

Code	Qty
R93630	1



330mm



215mm

Max. 10mm


21 KG

ROMUS®


Heavy Duty Flooring Cutter

Specially developed for LVT and technical PVC tiles up to 65 x 65.

For cutting flexible and rigid LVT, laminate, engineered parquet, carpet, PVC and rubber tiles. Long handle for extra cutting power, removable for transport.



650mm



540mm

Max. 10mm

33.5 KG

ROMUS®

Code	Qty
R93660	1





Straticut Laminate Guillotine

A clean noiseless 90° cut which does not damage the melamine.

Blade with no knife edge: does not need to be sharpened, no risk of injury.

Stop for cutting on an angle, lengthways or in large widths greater than 230mm.

Supplied with support for cutting long pieces and with shavings catcher.

Ergonomic handle/ Base with 4 anti-scratch felt pads.



680mm



Min. 7mm
Max. 12mm



7 KG

**ROMUS®**

Code	Qty
R93725	1

Rom-Cut trimmer

The Rom-Cut trimmer is a tool that ensures precise, clean cutting of PVC floors, as well as soft textile and rubber coverings. Thanks to its rail, it guarantees a straight, uniform 90° cut to length, and can be used for -


- A cut to length from a roll
- A neat cut to length
- A double cut to length

**ROMUS®**

Code	Qty
R95530	1



Mitre Block

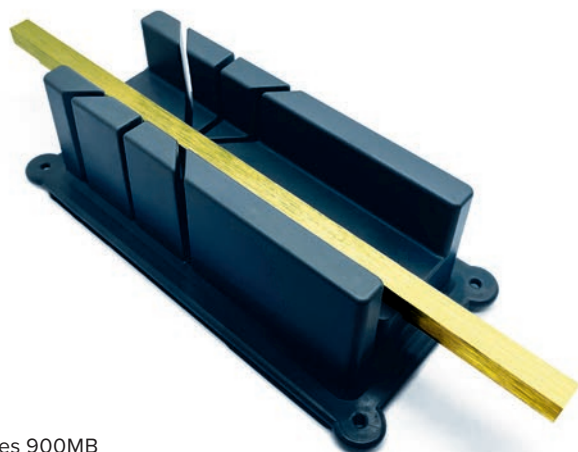

Replaces 900MB

Code	Qty
BU-FTMBLK	10

BIHUI

Trim Mitre Cutter

BIHUI

Code	Qty
BU-FTC200	18

Zinc



PVC Grip





Delphin Knife

**ROMUS®**

Code	Qty
R81150 Loose	1

Automatic Taurex Knife

**ROMUS®**

Code	Qty
R91115	1

High-Tech Trimmer

**ROMUS®**

Code	Qty
R91410	6

Carpet & Vinyl Trimmer

**ROMUS®**

Code	Qty
R91400	15

X-Cut K125 Blades

ROMUS®

1.25% Carbon Steel

10 x 10 Dispenser

Code	Qty
R92416 For use with the 91400 10 and 91410 (above)	



Code	Qty
R92226 For safety flooring and lino	10



Code	Qty
R92236 For safety flooring and lino	10



Code	Qty
R92300 For use on LVT, ply and hardboard	10



Code	Qty
R92136 Multi-functional	10



Standard Blades

1% Carbon Steel

Poly wrapped in 5's

Compatible with Delphin and Taurex knives (above).

Code	Qty
JB92A0203	100



Code	Qty
JB96LP0503	100



Code	Qty
JB96W0503	100



Code	Qty
JB99A0603	100



**Pro-Wet**

Suitable for drilling porcelain, marble, granite and travertine. Electro plated diamond cutting rim with discharge hole for dust removal, the straight shank fits all standard drills.

Code	Size	Qty
BU-DBW06	6mm	10
BU-DBW08	8mm	10
BU-DBW10	10mm	10
BU-DBW12	12mm	10
BU-DBW20	20mm	10
BU-DBW22	22mm	10
BU-DBW25	25mm	10
BU-DBW27	27mm	10
BU-DBW30	30mm	5
BU-DBW35	35mm	5
BU-DBW45	45mm	5
BU-DBW50	50mm	5
BU-DBW68	68mm	5



Drilling



Hex

**BIHUI****Dry Drills**

Suitable for drilling porcelain, marble, granite and travertine.

Diamond brazed cutting rim with dust discharge hole.

M14 Thread fits directly onto angle grinder with 11,000rpm.

Code	Qty
BU-DBDF06	6mm
BU-DBDF07	7mm
BU-DBDF08	8mm
BU-DBDF10	10mm
BU-DBDF12	12mm
BU-DBDF20	20mm
BU-DBDF22	22mm
BU-DBDF25	25mm
BU-DBDF28	28mm
BU-DBDF30	30mm
BU-DBDF35	35mm
BU-DBDF45	45mm
BU-DBDF50	50mm
BU-DBDF68	68mm



Drilling



M14

**BIHUI**



Brazed Dry Drill Bits with Wax

Code		Qty
BU-DBDQ06	6mm	10
BU-DBDQ08	8mm	10
BU-DBDQ20	20mm	10

**NEW**

Drilling



2500 RPM

**BIHUI**

Diamond Hole Saw Set

- Suitable for drilling porcelain, marble, granite and travertine.
- Diamond brazed cutting rim with dust discharge hole.
- M14 Thread fits directly onto angle grinder with 11,000rpm.
- Aluminium case including:
6, 8, 20, 35, 50 & 70mm hole saws.

Code	Qty
BU-DBDMK6	10



Drilling



M14



Pieces

6**BIHUI**

Brazed Core Bits

Aluminium case including:
25,35,40,45,50,68
Diamond Bits 20mm
Taper Bits 20-48
Diamond Blade 125mm
Grease

Code	Qty
BU-DBDMS10	1

**NEW**

Drilling



M14




Pieces

10**BIHUI**



Tile / Glass Drill Bits

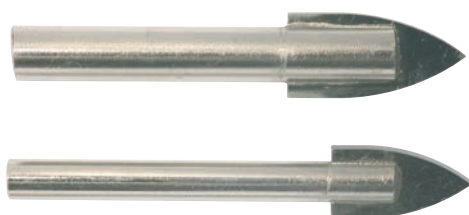

Carbide tipped drill bit suitable for glass and glazed ceramic tiles. Not suitable for porcelain.

Replaces 836 / 838

Code	Qty
BU-DBG06 6 mm	10
BU-DBG08 8 mm	10

Cooling Wax



Cooling wax for optimal performance of diamond core bits (diameters up to 12mm). Simply switch the drill off and sink the core bits into gel for a couple of seconds.

Cools, cleans and lubricates diamond drill bits.

Do not engage the bit while submerged in the cooling gel.



Hole Locator & Cutting Guide



Code	Qty
BU-DBG6	20





Vacuum Brazed Edge Grinding Wheels

NEW

For granite, marble, ceramic or ceramic tiles etc.



Semi Bullnose

Code	Qty
BU-DCPB05	1

5mm



Code	Qty
BU-DCPB10	1

10mm



Full Bullnose

Code	Qty
BU-DCPV22	1

22mm



Code	Qty
BU-DCPV30	1

30mm



115mm



M14



Grinding



Grit #40



BIHUI

Grinding Wheels

Convex, concave and half-concave bullnose grindings wheels provide you with the ability to create a perfectly finished bevelled edge. Designed for use with angle grinders the medium grit wheels are suitable for porcelain stoneware, granite and marble.

Full Bullnose

Code		Qty
BU-DGW310	10mm	20
BU-DGW320	20mm	20

Semi Bullnose

Code		Qty
BU-DGV310	10mm	20
BU-DGV320	20mm	20

Groove

Code		Qty
BU-DGR310	10mm	20



75mm



11,000 RPM



Grinding



22.23mm



Grit #50/60



BIHUI





Diamond Mill

For enlarging, counter sinking, shaping and smoothing after drilling tiles to prevent tension and cracking.



M14



BIHUI



Conical Type

Medium Grit 50/60

2-38mm

20-48mm

10mm

20mm

Code	Qty
BU-DMC238	10

Code	Qty
BU-DMF2048	10

Code	Qty
BU-DMB10	10

Code	Qty
BU-DMB20	10

Heavy Duty Nipper

BIHUI



Replaces 971HD


Code	Qty
BU-TND8	10

Soft Grip



Lockable Contour Gauge

BIHUI

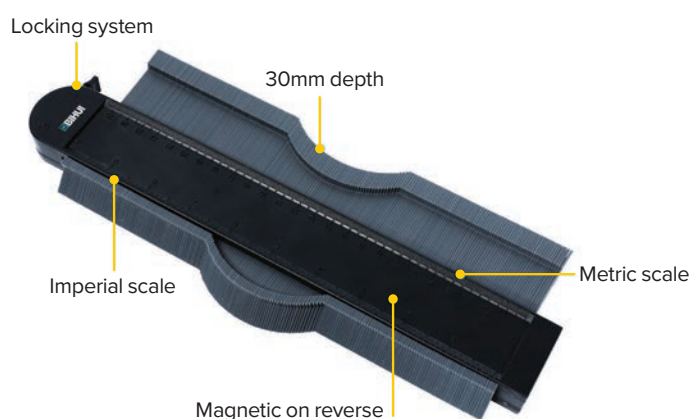

Code	Qty
BU-TPL250	12

250mm

105mm


Universal Polishing & Grinding Flap Wheel

NEW

#60 Grit




Code	Qty
BU-DPM060	10

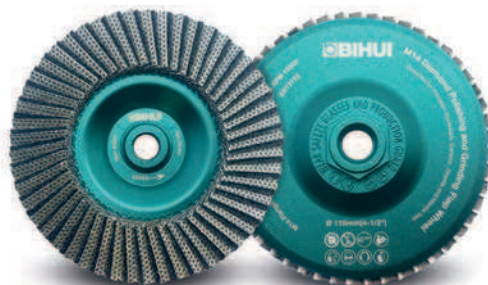

#120 Grit



Code	Qty
BU-DPM120	10

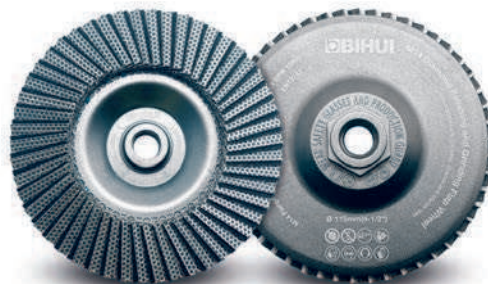

#200 Grit



Code	Qty
BU-DPM200	10



115mm



M14



Polishing



BIHUI



Ergonomic Hand Pads

For smoothing the edges of any type of marble, granite, porcelain, stoneware and ceramics.

- Electroplated finishing

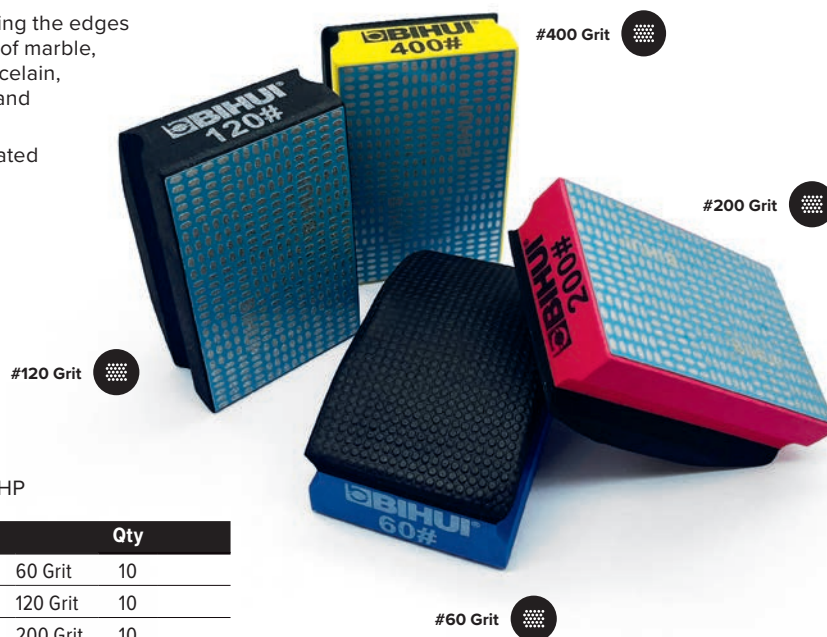

Replaces DHP

Code		Qty
BU-DMP060	60 Grit	10
BU-DMP120	120 Grit	10
BU-DMP200	200 Grit	10
BU-DMP400	400 Grit	10

95mm



55mm



Foam Grip



Polishing




BIHUI

Rectangular Hand Pads

Extra-long rectangular design for easy polishing in tight areas.

Soft EVA backing for comfortable Grip

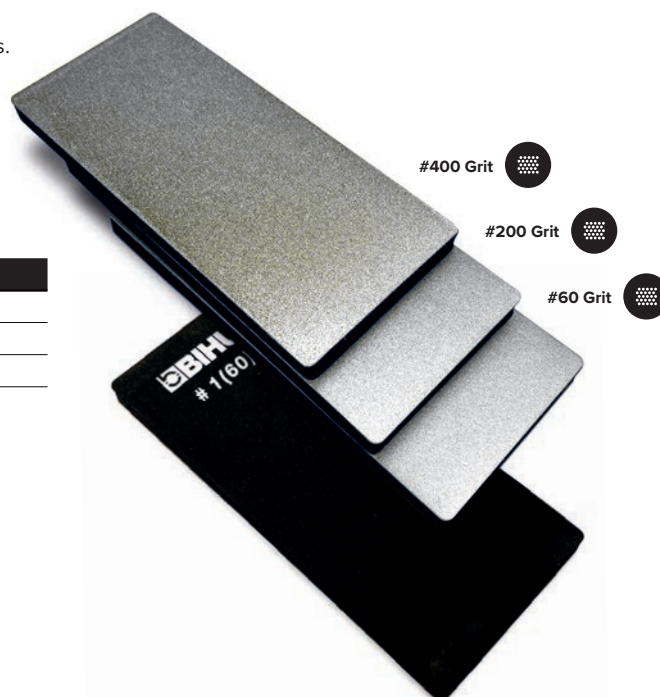

Code		Qty
BU-DHPS1	60 Grit	20
BU-DHPS2	200 Grit	20
BU-DHPS3	400 Grit	20

170mm



75mm



11mm



EVA Backing




Polishing



BIHUI




Polishing Pads

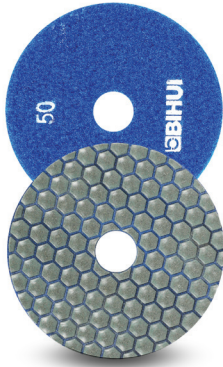


#50 Grit

Code	Qty
BU-DPP405	25

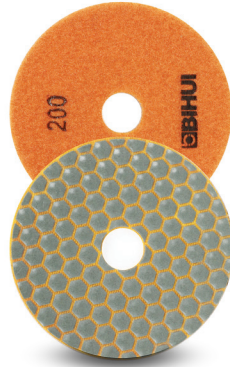


#200 Grit

Code	Qty
BU-DPP420	25

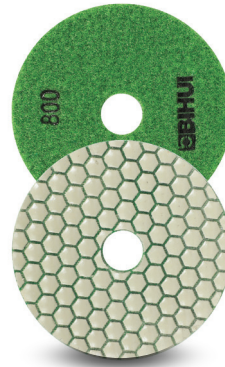

#800 Grit

Code	Qty
BU-DPP480	25

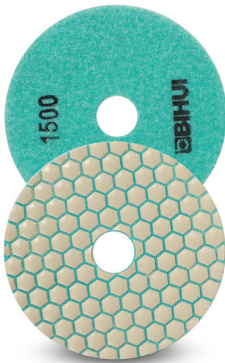

#1500 Grit

Code	Qty
BU-DPP415	25



#50 Grit

Code	Qty
BU-DPV405	10



#100 Grit

Code	Qty
BU-DPV410	10



Rubber

Packing Pad,
velcro back

M14

Code	Qty
BU-DPPH4	10



Polishing



100mm

**BIHUI**

**Mixers****Corded****NEW**

230 V

1800 W

160mm

615mm

M14

- 2 load speeds: 250-500rpm, 400-800rpm
- 5 speeds adjustable
- Max. mixture loading 65L
- Quick change adapter

Code	Qty
BU-MMB1800	1



230 V

1200 W

120mm

600mm

M14

- 2 load speeds: 150-300rpm, 300-650rpm
- Heavy Duty gear system with large torque

Code	Qty
BU-MME1200	1

Cordless**NEW**

BPTT

21 V

4.0Ah

120mm

600mm

M14

- 2 load speeds: 130-330rpm, 260-690rpm
- Quick assembly mixing paddle
- Mixing Volume: 20 litres
- Brushless motor
- Soft start
- Constant power
- Overload protection

Code	Qty
BU-MMFB12	1

BPTT Battery & Charger (not included)

Code	Qty
BU-BP21-CGK	Charger 1
BU-BP21-BAT4.0	Battery 1

Mixer Station with Timer

- Transport wheels
- Thermal protection prevents motor overload
- Three piece design for easy storage
- Maximum mixing capacity 50kg

Code	Qty
BU-MMWT65	1



230 V

900 W

65 L

1440 RPM





| Mixing Paddles

**BIHUI**

Suitable for mortar, adhesives, plaster and screed



Code	Qty
BU-MPGZ600	4

**BIHUI**

Suitable for compact and viscous materials - ready-mixed mortar, cementscreed and plaster.




Code	Qty
BU-MMB-MP01	8

**BIHUI**

Suitable for heavy and highly viscous materials - concrete, all mortars including epoxy, and resin screed.



Code	Qty
BU-MMB-MP02	8

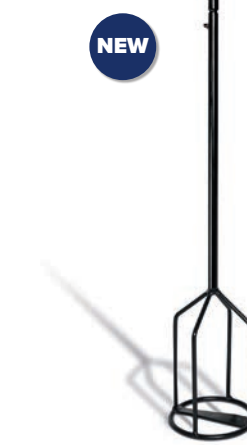**BIHUI**

Suitable for tile adhesive, adhesive mortars, and levelling compounds.



Code	Qty
BU-MMB-MP05	4

**BIHUI**

Suitable for soft and viscous grouts, levelling compounds, and thin-set Mortar.

Ø160mm



Code	Qty
BU-MMB-MP06	4

**ROMUS**

Polygonal Stirrer for Levelling Compounds



Code	Qty
R94414	1

**ROMUS**

Round Stirrer for Levelling Compounds



Code	Qty
R94418	1

**ROMUS**

Stirrer for Adhesives



Code	Qty
R94424	1

**ROMUS**

Stirrer for Paint



Code	Qty
R94435	1

**BIHUI**

Twisted mixer for mixing grout etc. - chrome plated.



Replaces 914

Code	Qty
BU-MPPS400	5

BIHUI

Quick change adapter



Code	Qty
BU-MMBADP	10

**NEW**

Extension Bar



Code	Qty
BU-MPEXT300	10

NEW



Transport Trolley

- Compatible with carry system for easy single-person operation
- Includes limit design to prevent tile tipping
- Adjustable height for different tile sizes

Code	Qty
BU-LFTRLY	10



NEW

100mm



114mm



200

Max.
1.2 x 0.6m

Max. 40mm



Carry System



NEW

Suction Cups x 6

Code	Qty
BU-LFCSE-6C	1

140
(single cup)

Main Frame

Code	Qty
BU-LFCSE-2R	1



Cross Frame

Code	Qty
BU-LFCSE-2F	1

1.65m



1.7 - 3.2m



6 x Battery



4 x Sliding

Max.
3.2 x 1.6m

200





Pro+ 170 Auto

- Compatible with almost any surface
- Double layer rubber suction pad for smooth surface usage
- Additional suction pad specifically for textured surface




Code	Qty
BU-LFBSL	1
BU-BP21-CGK	Charger for BP21-BAT2.0 1
BU-BP21-BAT2.0	Battery for BPTT Range 1

Silicone Pad

Rubber

Code	Qty
BU-LFBSL-TXP	For textured surfaces 1
BU-LFBSL-RUB	For smooth surfaces 1

Spare Parts

Rubber Button
(XBSCBC8-12)5 Pairs Cotton Pads (5 Large, 5 Small)
(XBLFBSL-FF)Motherboard
(XBLFBSL-21)

21 V



170



3 Hours



2.5 Hours

**BPTT**
Battery Powered Tool**BIHUI**

Pro 140 Vario

Featured with a manual and electric pump option, suitable for use with smooth and textured surfaces

Code	Qty
BU-SCBS8	10

110

Electric Battery Pump

- Working indicator button
- USB charger 30cm
- 3.7V - 1200mAh

Code	Qty
BU-SCBS8-PG	100

140



3.7 V



200mm




2-3 Hours



3 Hours

**BIHUI**

Spare Parts

Cotton Pad
(XBSCBS8-22)Circuit Board Cradle
(XBSCBS8-BH)Replacement Switch /
Circuit Board
(XBSCBS8-CP)Manual Pump
(XBSCBS8-MP)



Pro 140 Auto

- Automatic air replenishment mechanism
- Double monitoring system - digital display and pressure gauge
- Dual rubber and extra rubber ring guarantee superior sealing
- Large Lithium battery 26500, 5000Ah works longer
- Suitable for both smooth and texture surface
- Suction cup for handling large and heavy tiles



Code	Qty
BU-SCBC8	10

Spare Parts



Motherboard
(XBSCBC8-9)



5 Pairs Cotton Pads (5 Large, 5 Small)
(XBLFBSL-FF)



Rubber Button
(XBSCBC8-12)

3.7 V



140



200mm



2-3 Hours



3 Hours

**BIHUI**

Pro 120 Slim Auto

NEW

- Automatic air replenishment mechanism below 90kg
- Feature with digital display
- Steel plate design for gap adjustment and lifting
- Dual rubber pad guarantee superior sealing
- Suitable for smooth and textured surfaces



Code	Qty
BU-SCBLVT	1

3.7 V



120



2-3 Hours



3 Hours

**BIHUI**



HD 110 Slim Manual

NEW

- Manual Suction Cup
- For textured and smooth surfaces
- 245 x 165mm



150

**BIHUI**

Code	Qty
BU-SCVE9	1

SD 85 Twin

BIHUI

- Size: 125mm (5")
- Made of aluminium with rubber suction cup
- Ideal for carrying ceramic tiles, marble and glass
- Before use make sure the surface is clean and smooth

Code	Qty
BU-SCDB4	12



LD20 Mini

BIHUI

For easy positioning and repositioning of floor and wall tiles with varying lifting strengths to accommodate all types of installations.

Replaces B334210

Code	Qty
BU-SCSMN	24

85mm



20




2 in 1 Multi Angle Tile Fixer & Adjuster

BIHUI

- Work for 90°& 180°& 270° alignment and tile gap adjustment
- Two buttons for adjusting tile level
- Light duty and durable structure
- Ideal for handling with porcelain or stone tiles and glass

Code	Qty
BU-LFTFV6	10

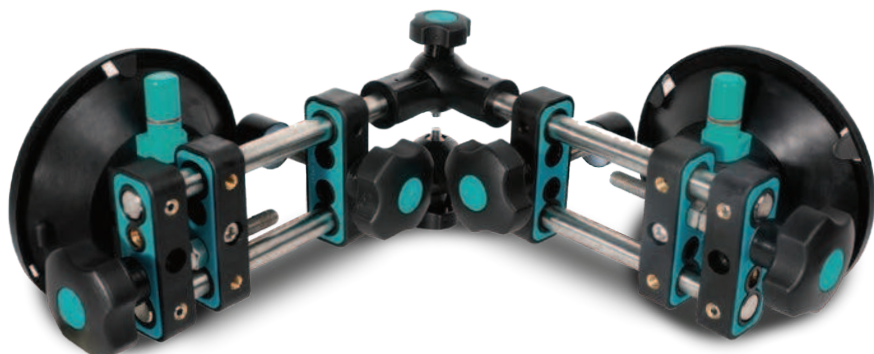



Vibration Tile Beater

Compact and lightweight, the vibration beater removes residual air bubbles trapped between the tile and adhesive, to give a solid bed finish.

The intensity of the vibration is adjustable via the trigger, other features include integral level and working light.

- Lithium Battery
- Charging Time: 2 Hours
- Battery Life Indicator



16.8 V



35


BIHUI

Code		Qty
BU-LFTBV	Vibration Tile Beater V2	1
BU-LFTBVbatt	Spare Battery for BU-LFTBV	1

Smart Vibration Tile Beater

- Continuously variable transmission speed
- 45kg lifting capacity suction cup
- Level bubble
- Anti-vibration auxiliary handle
- TPR grip for maximum comfort



21 V



45



10,000 RPM



BPTT
 Battery Powered Tiling Tools

BIHUI

Code		Qty
BU-LFTBS	Smart Vibration Tile Beater V2	1
BU-BP21-CGK	Charger for BP21-BAT2.0	1
BU-BP21-BAT2.0	Battery for BPTT Range	1

Square Beating Block


- With 130 x 7mm opening in the middle
- Suitable for most suction cups
- Spreads the vibration area across the tile
- 260 x 180 x 12mm

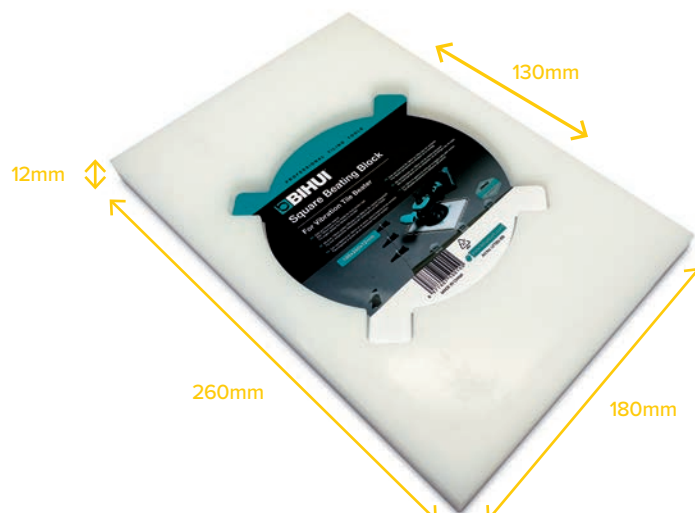

Code	Qty
BU-LFTBS-BB	20



Tile Magnets for Access Panels

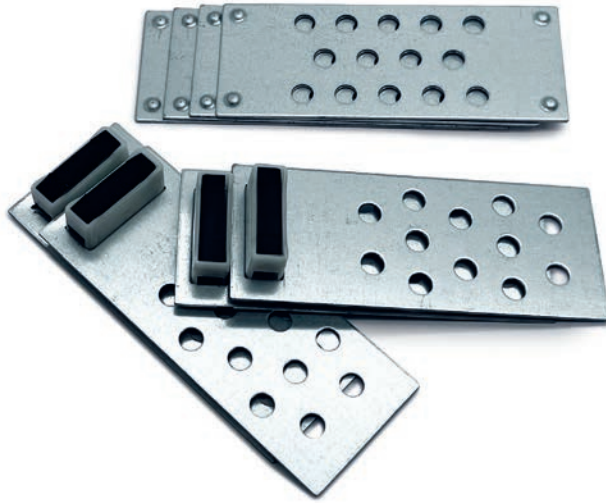

Code	Qty
912	10



Bucket Scoop



Code	Qty
BU-PTK165	12

Stainless Steel



Soft Grip



Grout Rake



Replaces 925G / 925B

Code	Qty
BU-TGRK2	12
BU-TGRKB2	2 x Spare Blades



Epoxy Grout Applicator Kit

NEW

Pieces

9

BIHUI



Includes

- 1 x ergonomic handle
- 2 x interchangeable paddles in 45° angle
- 1 x triangle scraper
- 5 x attachments for applicator
3.6/4.6/5.9/7.2/8.1mm
- Storage box



Code	Qty
BU-STAK9	10

Silicone Application Set

BIHUI

2 Piece Tile Support

BIHUI



Code	Qty
BU-STAK4	10

Pieces **4**



Code	Qty
BU-TAS25	10

80
1-20mm



Decoupling Membrane Roller

Simple but intuitive design to ensure optimal adhesion when laying membrane, the evenly distributed weight across the roller promotes strong bedding between surfaces.

- Front shelf for ballast
- Light and compact for portability

Code	Qty
BU-UMR330	1

Spare Parts

Large Bolt and Cap (XBUMR330-LB)

Small Bolt and Cap (XBUMR330-SB)

Small Cap (XBUMR330-SC)



Extendable




BIHUI

PROGRESS
PROFILES

Use with
PRODESSO
see page 62

TOOLS

Resin Spazzle

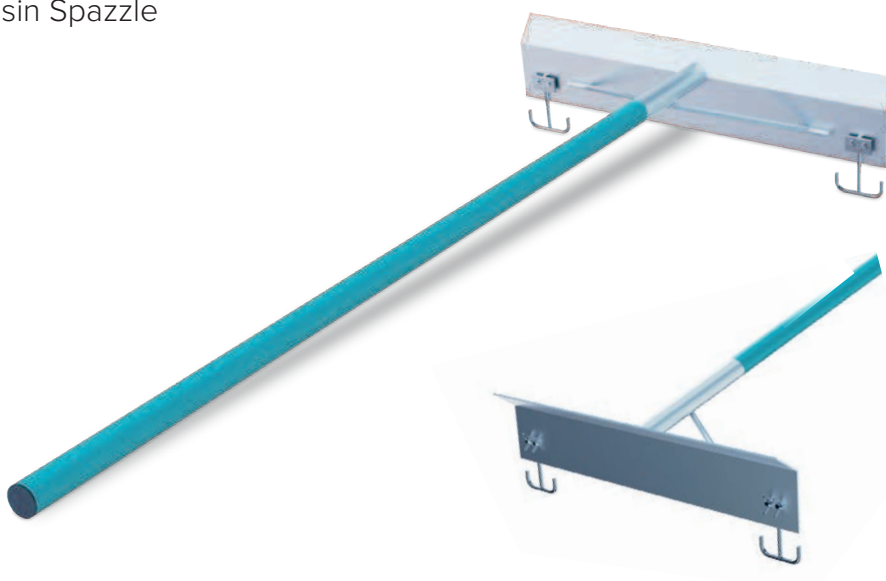

- Solid alloy blade
- Adjustable depth pegs

Code	Qty
BU-FTSP600	1

600mm



1.5m



3mm



35



BIHUI



Linoleum Roller

For flexible PVC, linoleum, rubber and dry-back LVT floors.

To be applied after having glued and smoothed a first time with a high density cork press Ref 93145 (opposite).

Code	Qty
R193160	1



520mm



135mm



50 KG



ROMUS®

Floor Roller

Code	Qty
BU-FTFREX	6



190mm



430-685mm



Extendable



38mm



Soft Grip



BIHUI®



Double Angle Roller

ROMUS®



Code	Qty
R93138	1

Roller Smoother

ROMUS®



Code	Qty
R93139	1

Steel Roller

ROMUS®



Code	Qty
R93170	1

Cork Press

ROMUS®



Code	Qty
R93145	1

Press Clic Roller

ROMUS®



Code	Qty
R93159	1

1.6 KG



Duo Pressure Roller

BIHUI



Code	Qty
BU-FTDPSR	5

1.53 KG





Magma Welding Gun

- Hot air blower for hot welding joints in PVC and linoleum flooring.
- Adjustable temperature and air flow depending on the speed of the hot welding process.

**NEW**

Code	Qty
R95060	1
R197980 Nozzle	1

Important: after using the hot air welding gun, never switch off the device directly. Set the temperature to 0 until the air comes out cold, this will preserve the life of the heater. The heater is considered a consumable and is not covered by the warranty.

230 V



1600 W



40-700



Internal / External



3m



1.90 KG

**ROMUS®**

Magma Welding Gun Starter Kit

PVC case including six parts:

- 1 x Romus MAGMA welding gun (R95060)
- 1 x Push-fit nozzle holder nozzle (R197980)
- 1 x Nozzle brush (R95198)
- 1 x Anti-glaze rapid nozzle (R95027)
- 1 x Mozart trimmer (R95130)
- 1 x Hand groover (R95175)

Code	Qty
R95055	1

**NEW**

Pieces

6**ROMUS®**

Code	Qty
R95027	1



Code	Qty
R95175	1



Code	Qty
R95130	1



Anti-Glaze Rapid Nozzle

Narrow (0.9 mm) hot airflow directed right into the groove.

For welding surface-treated PVC:

It prevents groove edges from damage.

Faster rod melting allows also faster welding.

Code	Qty
R95027	1



4-5mm

**ROMUS**®

Coving Anti-Glaze Rapid Nozzle

Narrow (0.9 mm) hot airflow directed right into the groove.

For welding surface-treated PVC:

It prevents groove edges from damage.

Faster rod melting allows also faster welding.

Curved spout especially for hot welding covings.

Code	Qty
R95028	1



4-5mm


**ROMUS**®

Swan Neck Nozzle

For finishing angles.

For melting the rod in angles by applying pressure.

Code	Qty
R95044	1

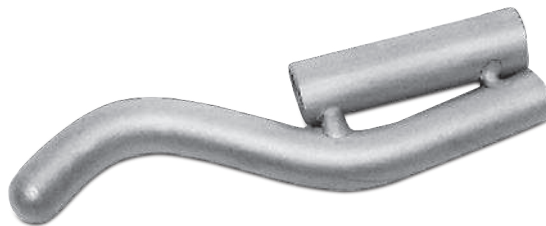**ROMUS**®

Fine Angle Finishing Nozzle

For hot welding of PVC floorings in inner and outer corners.

For melting the rod in angles by applying pressure.

The external diameter of 7 mm allows to apply the welding rod in narrower angles without risking to damage the flooring.

Code	Qty
R195039	1



7mm

**ROMUS**®



Mozart 2 In 1 Trimming Knife

ROMUS®

Revolutionary tool that combines a trimming blade, a trimming guide that easily retracts for final trim.

Allows the weld seam to be levelled safely without the risk of penetrating the floor covering.

Code	Qty
R95130	1



Trimming Guides

Code	Qty
R95128	0.5mm 10
R95127	0.7mm 10

Blades

Code	Qty
R95129	5

Convex Rulers

ROMUS®


T Square

Code	Qty
R94964	1

4m


NEW

Tempered Steel

Code	Qty
R91536	1

0.6m

Carpet Tools

NEW
ROMUS®



Seam Roller

Code	Qty
R93916	1



Stair Tool

Code	Qty
R93841	1

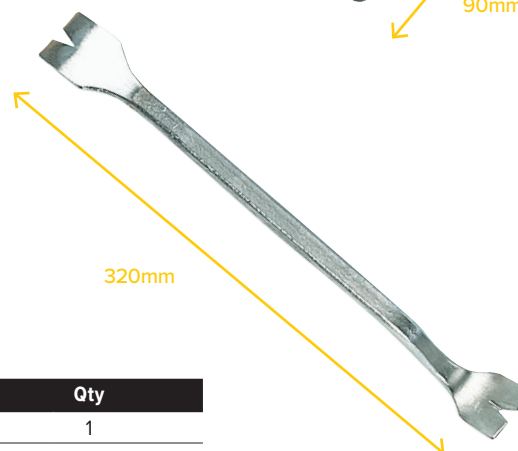

Clawbar

Code	Qty
R93860	1



Knee Kicker

Code	Qty
R93800	1




Dual Edge Rubber Float



Replaces 946G

Code	Qty
BU-CFHRL Epoxy	10

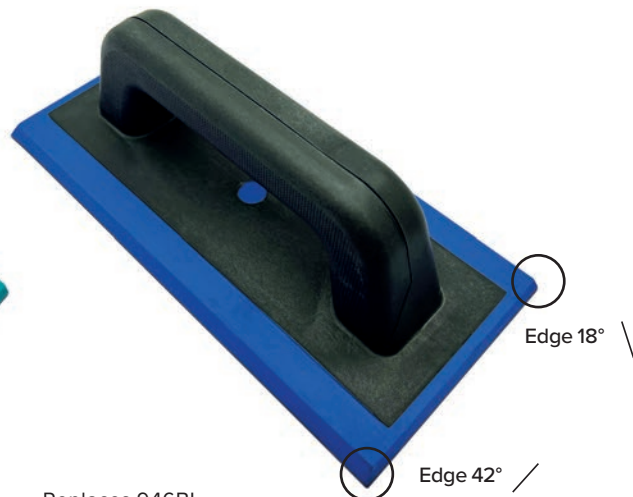

Replaces 946BL

Code	Qty
BU-CFHSL Cementitious	10

Professional Grout Float



Replaces 995

Code	Qty
BU-CFERS	12



Premium Grout Float



NEW



Code	Qty
BU-CFERB	12



Bucket Liner

- 25L Liner for 20L adhesive bucket
- Scale inside
- Reusable and long lasting

Code	Qty
BU-MPBL20	10



25L





Ceramic Trowel Set

Comes complete with 6 blades, an interchangeable handle and carry case which is ventilated at the bottom, making the cleaning process a whole lot easier and convenient. The interchangeable handle enables this trowel to be used by left or right handed professionals with ease.




Code	Qty
965SET	5




Code	Qty
965HDL	10

4mm Notch



Code	Qty
965BS4	10

6mm Notch



Code	Qty
965BS6	10

8mm Notch




Code	Qty
965BS8	10

10mm Notch



Code	Qty
965BS10	10

Tiger



Code	Qty
965BTG	10

Diagonal



Code	Qty
965BAN	10

Stainless Steel



115mm




280mm



Blades




Blades Included




4mm Square




6mm Square



8mm Square



10mm Square



Tiger



Diagonal



XL Ceramic Trowel Set

Comes complete with 6 blades, 2 x interchangeable handles and carry case which is ventilated at the bottom, making the cleaning process a whole lot easier and convenient. The interchangeable handle enables this trowel to be used by left or right handed professionals with ease.



Code	Qty
965XLS	5



Code	Qty
965HDL	10



6mm Notch



Code	Qty
965BS6XL	10

8mm Notch



Code	Qty
965BS8XL	10

10mm Notch



Code	Qty
965BS10XL	10

12mm Notch



Code	Qty
965BS12XL	10

Tiger



Code	Qty
965BTGXL	10

Diagonal



Code	Qty
965BANXL	10

Stainless Steel



130mm




480mm




Blades




Blades Included




6mm Square




8mm Square



10mm Square



12mm Square



Tiger



Diagonal



Flooring Trowel Set

Comes complete with 6 blades, an interchangeable handle and carry case which is ventilated at the bottom, making the cleaning process a whole lot easier and convenient. The interchangeable handle enables this trowel to be used by left or right handed professionals with ease.



Code	Qty
965FTS	5



Code	Qty
965HDL	10



Screed



Code	Qty
965BSC	10

1.5 x 5mm Notch



Code	Qty
965BV155	10

2 x 6mm Notch




Code	Qty
965BV206	10

A2 Notch




Code	Qty
965BVA2	10

B2 Notch



Code	Qty
965BVB2	10

B3 Notch



Code	Qty
965BVB3	10

Stainless Steel

280mm

115mm

Blades



Blades Included
4 sided notch




Screeding




1.5mm x 5mm V



2mm x 6mm V



A2 V



B2 V



B3 V



| Spreaders

Blade & Handle


Code	Qty
BU-FTSCB2	12

Code	Qty
BU-FTSCA1	12

Code	Qty
BU-FTSCA2	12

Code	Qty
BU-FTSCB3	12

Code	Qty
BU-FTSCB11	12

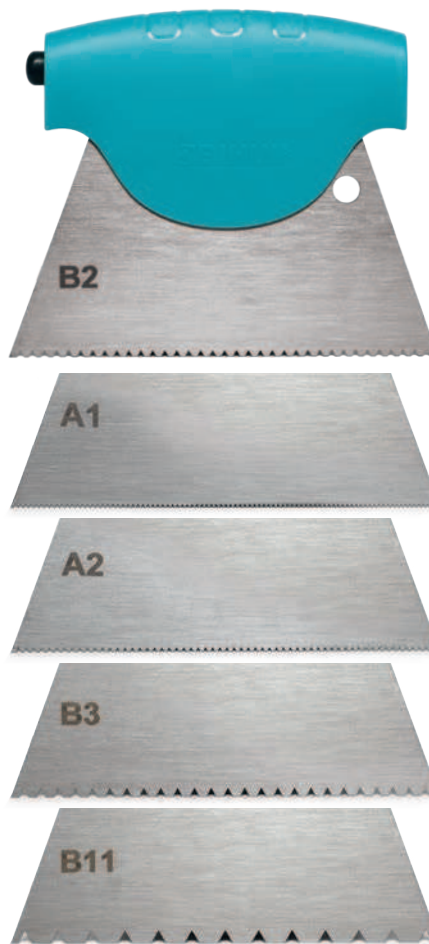

A1 Notch



Code	Qty
BU-FTSBA1	12

A2 Notch



Code	Qty
BU-FTSBA2	12

B2 Notch



Code	Qty
BU-FTSBB2	12

B3 Notch



Code	Qty
BU-FTSBB3	12

B11 Notch



Code	Qty
BU-FTSBB11	12

Plastic

180mm



Code	Qty
BU-FTSHDL	12

Carbon Steel



120mm



130mm



Changeable




Blades


5

BIHUI


Blades Available



A1 V



A2 V



B2 V



B3 V



B11 V





Quick Switch Extras

Stainless Steel




Note: Handle not included

A1 Notch 
 115mm 
 280mm 

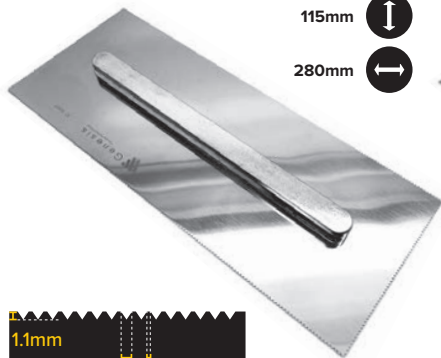



Code	Qty
965BVA1	10

12mm Notch 
 115mm 
 280mm 




Code	Qty
965BS12	10

10 x 20mm Notch 
 115mm 
 280mm 

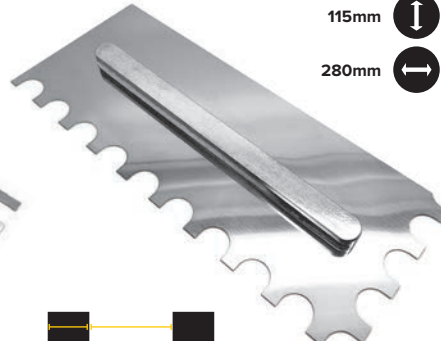


Code	Qty
965BR20	10

Screed 
 130mm 
 480mm 

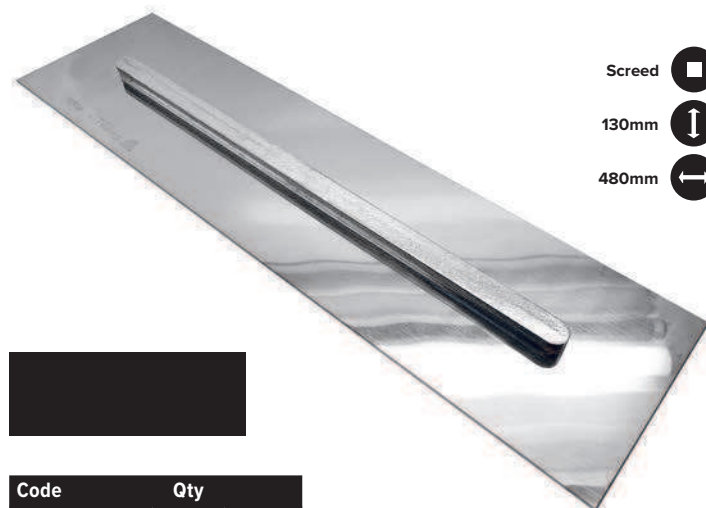

Code	Qty
965BSCXL	6

100mm 
 240mm 

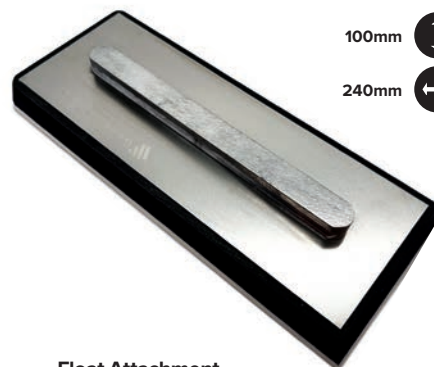

Float Attachment

Code	Qty
965FLT	6





Jumbo Trowel Set

Fifteen piece Stainless Steel trowel set in storage case.

Set Includes:

Plastic storage box with drainage holes for cleaning

2 x changeable TPR handle

6 x 280 x 115mm blades

6mm Square

8mm Square

10mm Square

10x20mm Round

Tiger

Diagonal

6 x 480 x 130mm blades

6mm Square

8mm Square

10mm Square


12mm Square

Tiger

Diagonal



Code	Qty
BU-PTSJK15	1

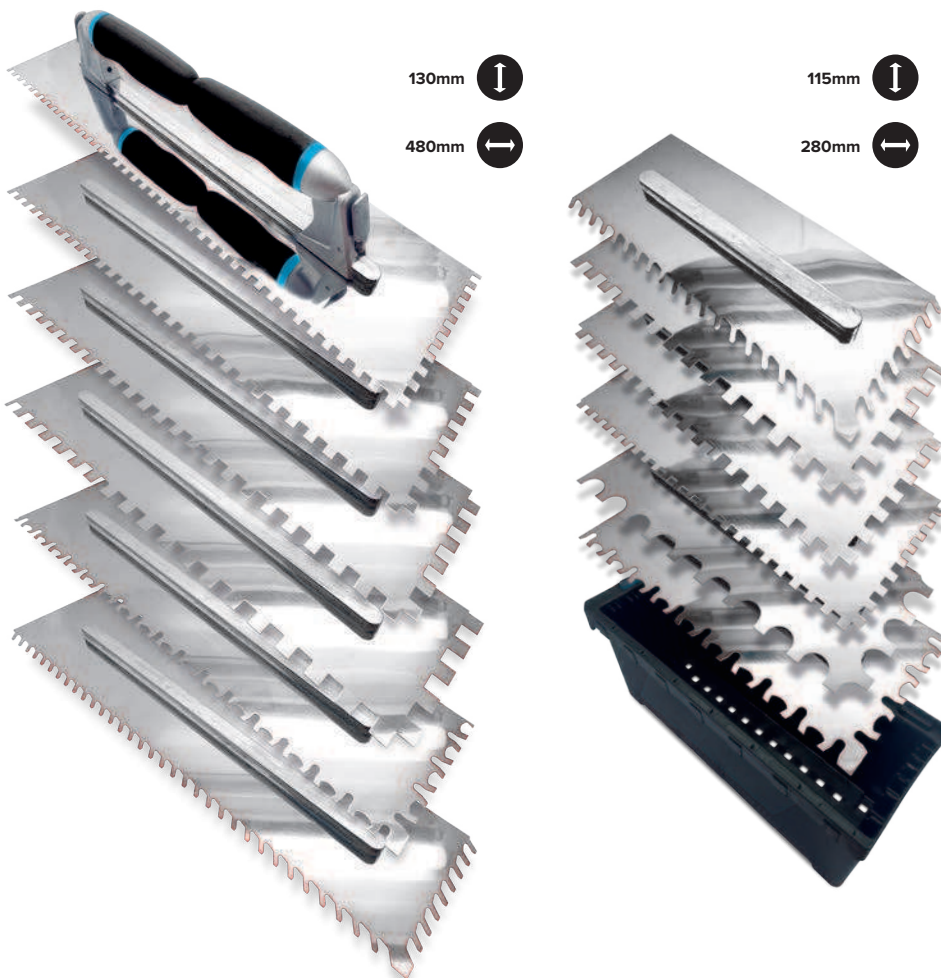

Stainless Steel



Blades


12

BIHUI


Blades Included




6mm Square




8mm Square



10mm Square




12mm Square



Tiger



Diagonal




10x20mm Round



Mini Trowel

Perfect for small and awkward areas such as niches, window reveals and confined spaces.

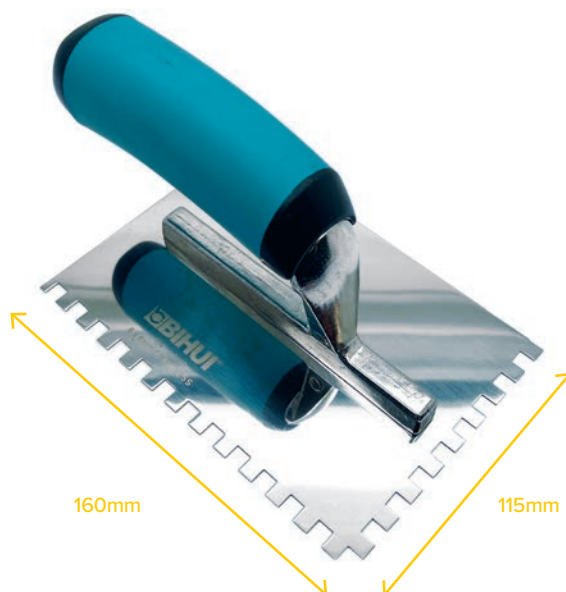

Code	Qty
BU-PTMN06	12

Stainless Steel



Soft Grip



BIHUI




6mm Square

Trowels

Extensive range of soft-comfort handle trowels with carbon steel blade.

Handle support held to blade with 6 welded rivets for durability.

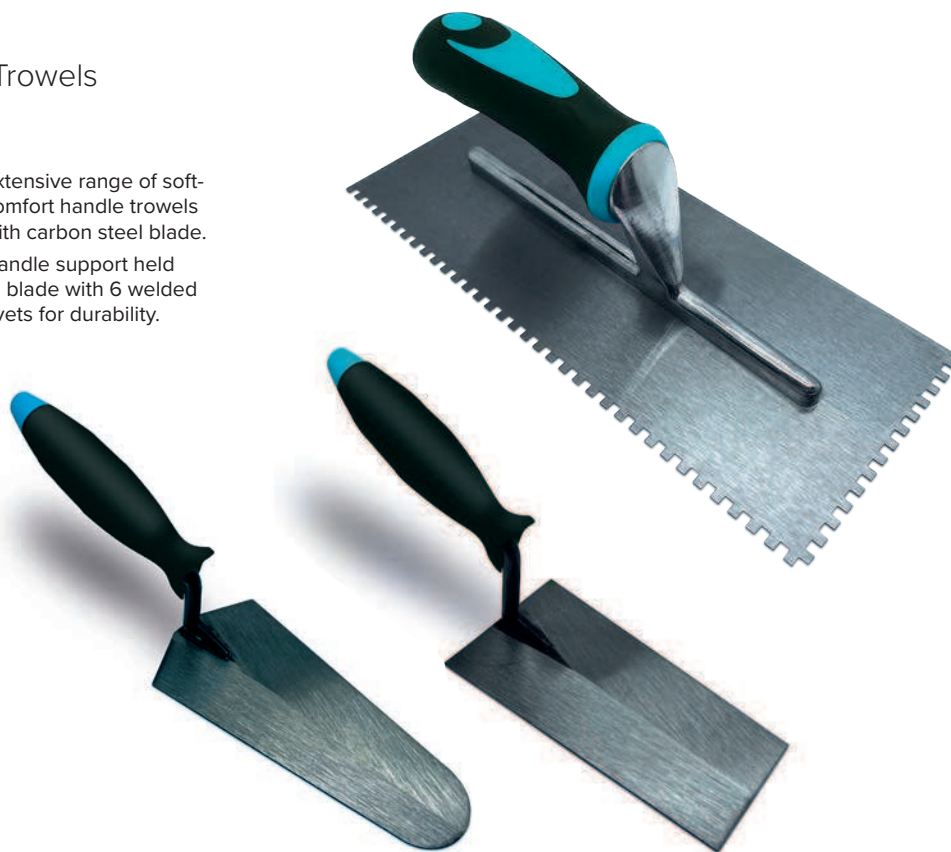

Steel



Soft Grip



0.6mm




BIHUI

Code	Replaces	Qty	Usage
BU-PTCB2V	910 2mm V Notch	6	Vinyl adhesives
BU-PTCB03	903 3.5mm Square Notch	6	Mosaics, small wall tiles, membranes
BU-PTCB04	904 4mm Square Notch	6	Mosaics, small wall tiles, membranes
BU-PTCB06	906 6mm Square Notch	6	Wall tiles
BU-PTCB08	908 8mm Square Notch	6	Larger wall and smaller floor tiles
BU-PTCB10	909 10mm Square Notch	6	Floor tiles
BU-PTCB12	907 12mm Square Notch	6	Floor tiles and slabs
BU-PTCB20	902 10 x 20mm Round Notch	6	Solid bed large format
BU-BTCHG6	952 Gauging Trowel	12	Pointing, mixing and scooping
BU-BTCHB6	953 Bucket Trowel	12	Scooping, mixing and transferring



Resin Trowels

- For compacting and evenly spreading resinbound aggregates
- Stainless steel blades reduces sticking
- Corrosion resistant
- 300mm option for smaller areas and edge work
- 450mm option for driveways and larger areas with ergonomic double handle design

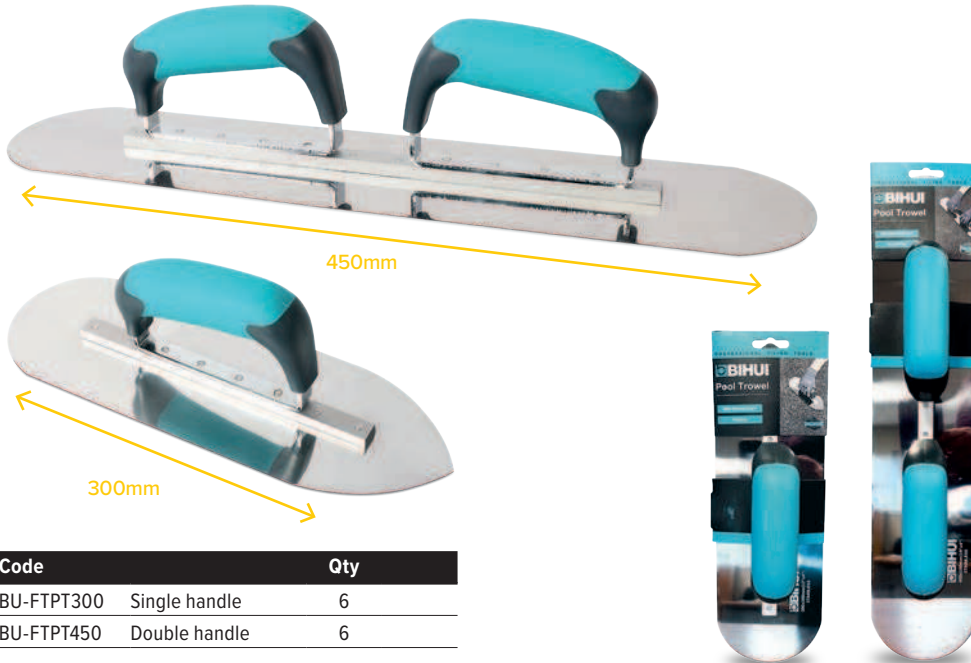

Code		Qty
BU-FTPT300	Single handle	6
BU-FTPT450	Double handle	6

Stainless Steel**0.7mm****Resinbound****BIHUI**

Flemish Trowel



To apply and spread the levelling compound even in the corners
Most commonly used for application of levelling compound in hard-to-reach areas

Stainless Steel



Code		Qty
R94201	450 x 120 mm	1
R94199	700 x 120 mm	1

Tempered Steel



Code		Qty
R94200	450 x 120 mm	1
R94202	700 x 120 mm	1

120mm**ROMUS**

Combination Spreader

BIHUI

Replaces 954

Code	Qty
BU-TGSP125	50

125mm



Multi-Purpose Grooving Tool

Multi-purpose grooving tool for finishing of welding rod on floor coverings, corners and covings.

Select a type of blade according to the desired application.



Code	Qty
R95160	1



6mm Ø



12mm Ø



Code	Pack
R95161	2

Code	Pack
R95162	2

Code	Pack
R95163	2

Code	Pack
R95164	2

Inc. 95161

**ROMUS®**


Linea Groover

ROMUS®

Code	Qty
R95101	1

Code	Pack
R95176	10

Rounded Groover

ROMUS®

Code	Qty
R5175	1

Code	Pack
R95176	10

Groov'in Tool

ROMUS®

- Mounted on four casters
- A metal guide at the front ensures optimal stability and facilitates tool movement, thus allowing precise and effortless chamfering.
- Front and rear blades: The beveler is equipped with a blade at the front, it is located just after the guide so that the chamfer is well-centered and perfectly made, and a rear blade to make the last centimetres of the chamfer against the wall.
- Adjustment dials allow you to adjust the depth of the front blades and rear according to specific needs.



Code	Qty
R95115	1

Code	Pack
R95116	5



Spacers

Our spacer range covers different shape and size formats for all your needs. Available in either small bags or bucket containers.

All spacers are injection moulded for precision and are individually separated during production to allow for faster use when tiling.

Code	Size	Type	Pack Qty	Pack	Packs per Box
507	0-5mm	Wedges	100	Bag	10
505	1mm	Cross	500	Bag	50
515	2mm	Cross	250	Bag	25
510	2mm	T Shape	250	Bag	25
555	2mm	Cross	500	Bag	15
625	2mm	Cross	2500	Bag	2
557	2mm	Cross	5000	Bucket	1
535	3mm	Cross	250	Bag	25
536	3mm	Cross	500	Bag	15
538	3mm	Cross	5000	Bucket	1
570	5mm	Cross	100	Bag	50



Rotera Wedge

The clever design of Rotera Wedge allows the installer to achieve accuracy by simply rotating to the exact space needed. They are the perfect choice when looking to support the bottom course when wall tiling on uneven surfaces.

Code	Pack Qty	Packs per Box
508	50	10



1-13mm



Horseshoe Shims

- High impact reusable plastic shim
- For both horizontal and vertical tile installation
- Easy to install & easy to remove
- For aligning marble, granite, porcelain and large format tiles

Display Stand available (BU-HS30-DSP)

Code	Shim Size	Pack Qty	Packs per Box
BU-HSB400	1.5mm	400	6
BU-HSP350	2mm	350	6
BU-HSR300	3mm	300	6
BU-HSY220	5mm	220	6


**BIHUI**

GLS Wedge



- Improved accuracy and installation speed
- Traction adjustable Applicator
- Perfect for all types of tiles
- Maximum working depth 12mm (standard base)
- XL Base for 12-20mm Tiles
- Consistent grout lines (1, 2 or 3mm)
- Ideal for Walls and Floors

Code	Description	Pack Qty	Qty
639	1mm Base	100	10
640	2mm Base	100	10
640BLK	2mm Base	500	6
641	3mm Base	100	10
641BLK	3mm Base	500	6
641XL	3mm Base for 12 - 20mm tiles	100	10
644	Wedge	100	5
644BLK	Wedge	500	4
646	Application Tool	1	6

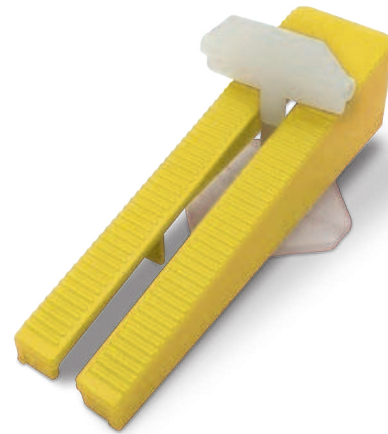

GLS Spin



- Flat base system
- Consistent grout line (2, 3 or 5mm)
- Maximum working depth 20mm (with 3 & 5mm bases)
18mm (with 2mm bases)
- Optional anti-scuff plate
- Ideal for walls and floors
- No installation tools required

Code	Description	Pack Qty	Qty
618	Caps	50	10
618BLK	Caps	250	10
622	2mm base	100	10
622BLK	2mm base	250	10
623	3mm base	100	10
623BLK	3mm base	250	10
624	5mm base	10	10
624BLK	5mm base	250	10
610	Anti scuff plates	100	10



T Spin



- Eliminates Lippage
- Anti-scratching large cap and fast spin down handle
- Stainless Steel 1.5mm T pin
- Suitable for 2-17mm tiles with 1.5-6mm tile clearance
- Maximum working depth 17mm (with BU-TSL50-SN)
20mm (with BU-TSL50XL-SN)
- Fully washable and re-usable

Code	Description	Pack Qty	Qty
BU-TSL50	T spin 1.5mm	50	12
BU-TSL250	T spin	250	4
BU-TSL50-SN	Nails	50	100
BU-TSL50XL-SN	XL Nails	50	100



Display Stand Available
Contact the Sales Team for more information



Laser Levels



- 360° self-levelling green beam
- 5, 12 and 16 line laser level
- Equipped with TFT color screen display
- Accurate reset function and self-levelling automatically
- Supports tilting at any angle
- Three levels of brightness adjustable
- Wall and floor Tile fixing, wall decoration, stair handrails, furred ceilings, plastering etc.
- Operating Time (all lasers on)
BU-LLG16 - 5 hrs
BU-LLG12 - 5 hrs
BU-LLG05 - 4 hrs
- Levelling accuracy +/- 3mm 10m
- Charging time minimum 6 hrs (but no more than 24 hrs)

BU-LLG16 Only

- Charging time 4 hrs
- Built-in memory function
- Professional grade waterproof and dustproof
- Remote control adjustment

Accessories include:

- USB charging
- Lithium-ion Battery
- Laser target plate
- Green glasses
- Adjustable bracket and level spirit
- Magnetic bracket PV9 & PV6+ (BU-LLG12 & BU-LLG16 only)



Code	Qty
BU-LLG-TRP 1.5m Tripod	1



Code	Qty
BU-LLG16 16 Lines Green Beams Laser Level	1



Code	Qty
BU-LLG12 12 Lines Green Beams Laser Level	1



Code	Qty
BU-LLG05 5 Lines Green Beams Laser Level	1

Spirit Levels



Code		Qty
BU-TSL060	600mm	8
BU-TSL120	1200mm	8
BU-TSL180	1800mm	8
BU-TSL240	2400mm	8

Spirit Level Display Stand (BU-TSL-DSP)

Contact the Sales Team for more information



3 x 90° & 180°



Rubber

**BIHUI**

Digital Spirit Level

NEW

- Shock absorbing end caps
- Magnetic side panels
- MEMS precision measurement
- LCD display with LED backlight
- Built-in 9V lithium battery
- Varies measuring modes
- Memory storage and recall function
- Low battery indicator light
- Automatically shuts down
- IP54 protection class

Code	Qty
BU-TSLD60	8

3 x 90° & 180°



8+ Hours

**BIHUI**



Switchable Float System

A single ergonomic handle that quickly attaches to four interchangeable float bases, enhancing efficiency and comfort.



Handle

Code	Qty
BU-CFSSHDL	10


**NEW**

140mm

280mm


30mm

Soft Grip

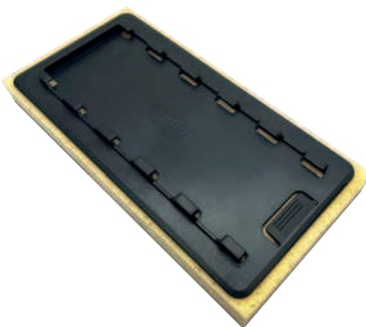


Hydro Sponge

Code	Qty
BU-CFSST11	10

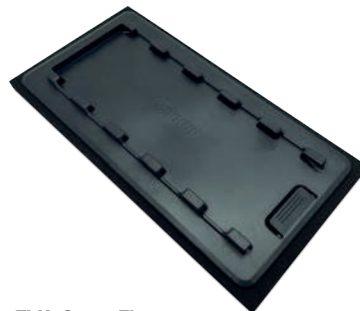


EVA Grout Float

Code	Qty
BU-CFSSE11	10

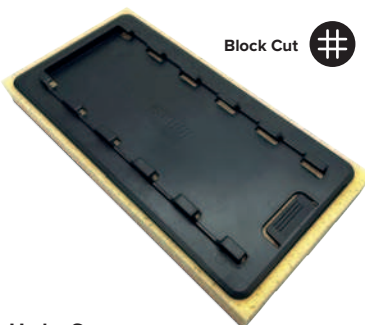

Hydro Sponge

Code	Qty
BU-CFSSS11	10

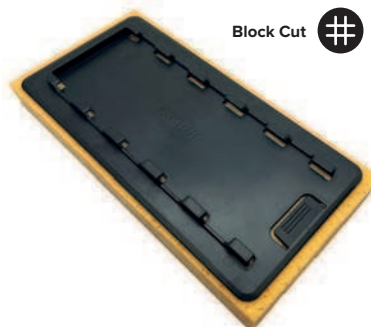

Cellulose Sponge


Code	Qty
BU-FSCS11	10



Float with Hydro Sponge




Epoxy Cellulose Sponge Float

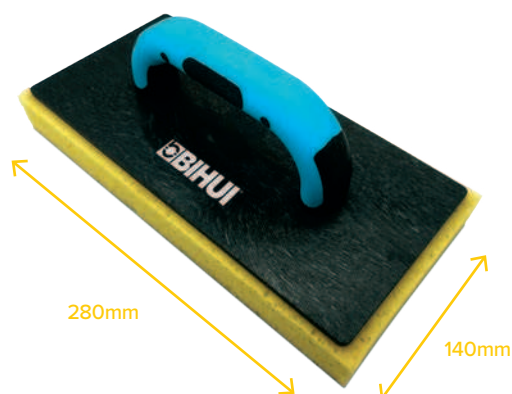

Replaces 998

Code	Description	Qty
BU-CFHSS11	Float with Block Cut Sponge	10
BU-CFHSSW11	Float with Sponge	10

Block Cut

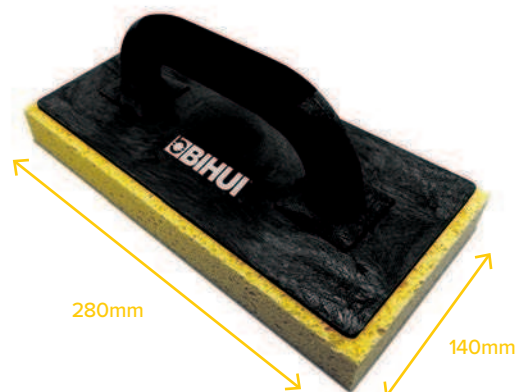

Replaces 998EXP


Code	Qty
BU-CFCSP11	24

Block Cut

Sponges




Cleaning Pads

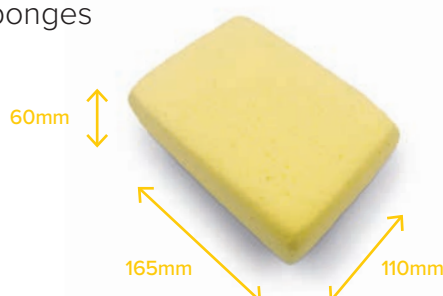


Replaces 916

Code	Qty
BU-CFHS165	36

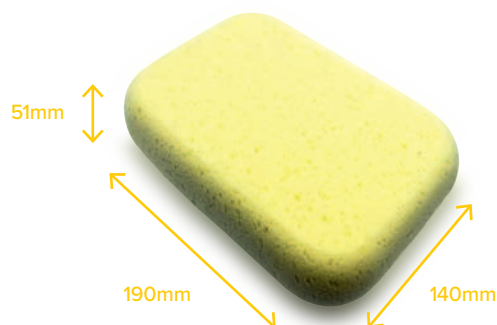

Replaces 996

Code	Qty
BU-CFHS190	50

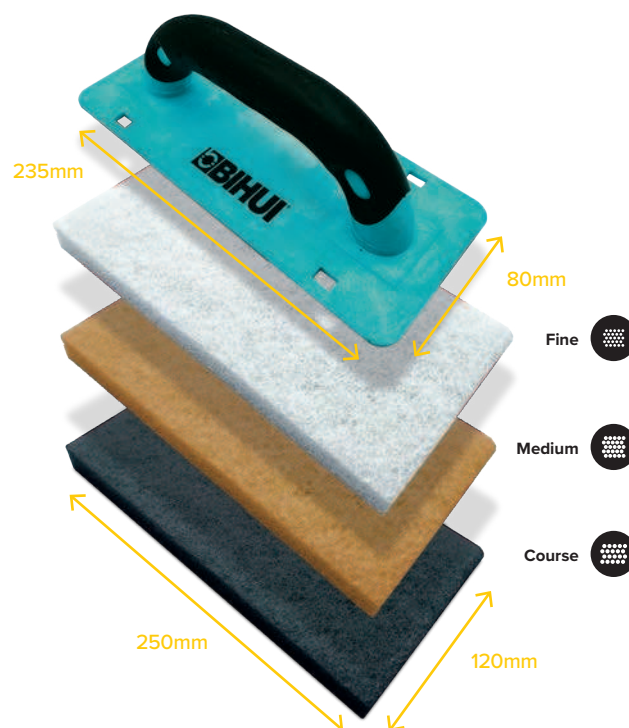

Code	Replaces	Description	Qty
BU-CSPK4-HDL	725-H	80 x 235mm Handle	12
BU-CSPB	725-BC	Coarse Pad (Black)	100
BU-CSPR	725-GM	Medium Pad (Orange)	100
BU-CSPW	725-WF	Fine Pad (White)	100
BU-CSPK4	725SET	Set including all the above	25



Washboy Set

23L

**BIHUI**

- Slanted base
- Ergonomic handle
- Easy to read measurements inside the bucket
- Spout / lowered lip for easy pouring
- Perforated twin rollers
- Plastic float with hydro sponge
- Plastic grate
- 4 x sturdy plastic wheels


Replaces 993

Code	Qty
BU-TWS24	1

Code		Qty
BU-TWS24-W	4 x Wheels	10
BU-TWS24-G	Plastic Grate	10
BU-TWS24-R	Rollers	10



Pro Floor Squeegee

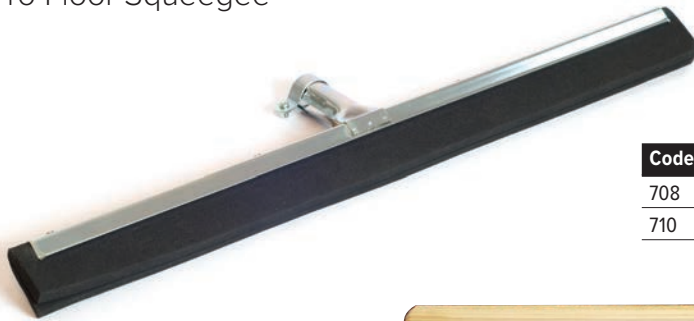

Code		Qty
708	Floor Squeegee	1
710	Wooden Shaft 1200 x 25mm	1

450mm



Super Power Turbofan

Speed 52 m/s
Pressure 180g
Motor 29MM Brushless
Motor bearing life 3 to 5 years
Battery 2 x 21700 3000MAH
Fast Charge 20W
Charging Type-C
Hood Magnetic and detachable

Code	Qty
BU-BPG22	1

**NEW**

7.4 V



180 W



130000 RPM



2.5 Hours

**BIHUI**



Work Light

NEW

Batteries / Chargers / Adapters all sold separately

Lumen: 5000LM

CCT: 4000K

IP65

IK07

RA>80

5 Level Dimming

Waterproof

Impact Resistance

Colour Index Function

Code	Qty
BU-BPLT40	1

Light only, tripod/charger/battery/adaptor not included.

**Tripod (not included)**

Code	Qty
BPLT-TRP	1


Mains Plug, BPTT Batteries & BPTT Charger (not included)

Code		Qty
BU-BPLT-CG	Mains Adapter	1
BU-BPLT-ADPP4	4 in 1 Multi Function Adapter	1
BU-BP21-CGK	BPTT Charger	1
BU-BP21-BAT2.0	2.0 Battery	1
BU-BP21-BAT4.0	4.0 Battery	1

40 W

BPTT
Battery Powered Tool Tech

BIHUI®

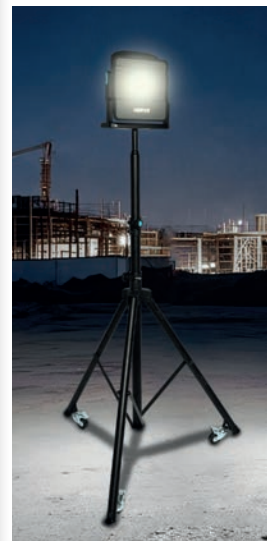**Battery Requirements****Multi Adapter**
BU-BPLT-ADP4

+

**Battery**
BU-BP21-BAT2.0 or BU-BP21-BAT4.0

+

Charger
BU-BP21-CGK**Mains Requirements**

BU-BPLT-CG



Tool Bags



260mm



510mm



300mm



Pockets

16

BIHUI

Code	Qty
BU-TBD20	10

Tool Bag with EVA Foam Inlay

Lightweight carry case with protective EVA foam inlay to make your own kit bag.

Code	Qty
BU-BPG24	10


**NEW****BIHUI**

Tile & Floor Repairing Kit

Perfect for repairing cracked tile, marble, ceramic walls and floor surfaces


- 1 x hot melt wax application tool
- 16 x hard wax sticks of different colours
- 1 x cleaning scraper
- 1 x textured scraper
- 1 x PU high-density sponge
- 1 x cleaning cloth
- 1 x Type-C charging cable

Code	Qty
BU-TPRK	20

**NEW****BIHUI**



Triangular Set Square

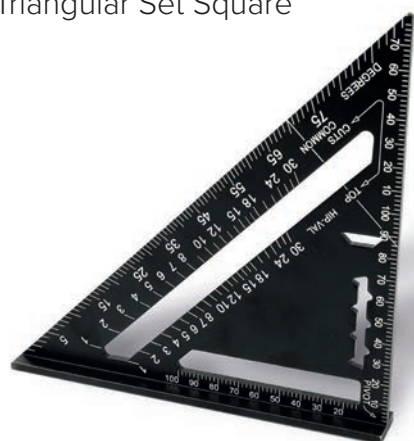

Code	Qty
BU-TMRT7	12

178mm



Tape Measure



Code	Qty
BU-TMR5M	10



5m



Rubber Mallet



Code	Qty
BU-RMW024	6

TPR



680g



Anti-Bounce Mallet



Code	Qty
R94964	1

Multifunction Trim Puller

NEW



Code	Qty
BU-FTPFT4	1

Stainless Steel



Plastic



Pencil Marker



Code		Qty
BU-TCM7	Automatic Pencil Maker with 6 black leads	12
BU-TCM7-SL	Spare Leads: 2 black, 2 red, 2 yellow	100

Commercial Nosings & Step Edges



Genesis
The Perfect Finish



Templates/Curves

For assistance with any aspect of measuring or making templates please speak to our sales team.

Not available for NXF/S, NTC, ATC, NTS, PVC or Vision


Please contact us for radiuses under 250mm



Step 1

Place the card or felt on top of the curve that requires a template and draw a line underneath with a felt pen or marker (see Figure 1) following the edge of the curve to create a smooth line.


Figure 1

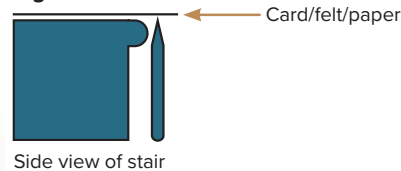

Step 2

Cut the shape along the felt pen mark (Figure 2) and clearly indicate the top and front edge of the template.



Figure 2

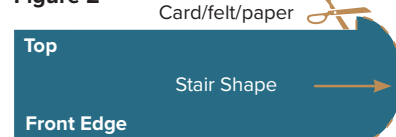

Step 3

Clearly mark on the template, the customer name and reference, the profile required, the colour insert required and finally whether your curve is required drilled or undrilled (Figure 3).

Figure 3

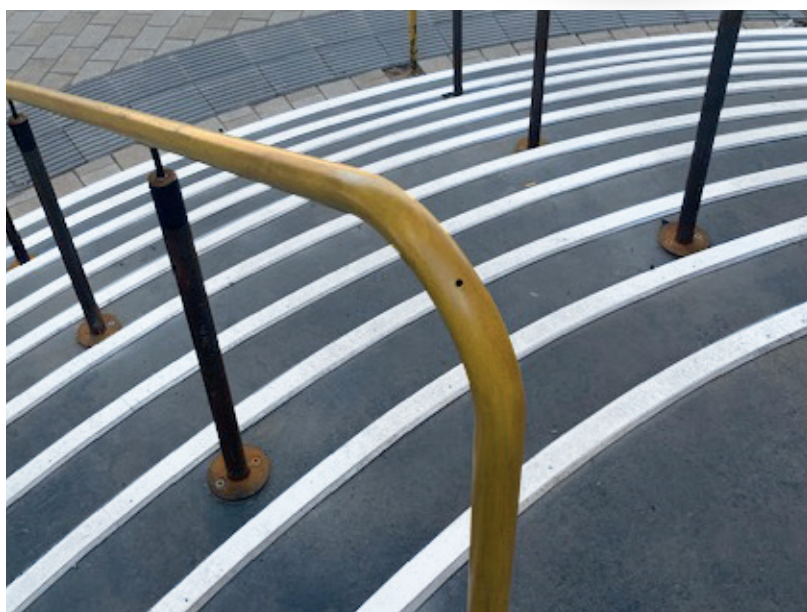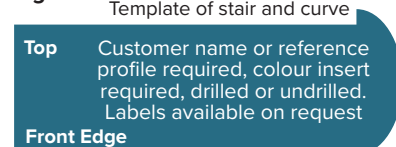


Drilling Guide


Start 75mm from each end and set all holes equally as indicated for single and double channel.

Length	No. of Holes
600 - 699	2
700 - 1049	3
1050 - 1399	4
1400 - 1749	5
1750 - 2099	6
2100 - 2449	7
2450 - 2799	8
2800 - 3220	9

Single Channel

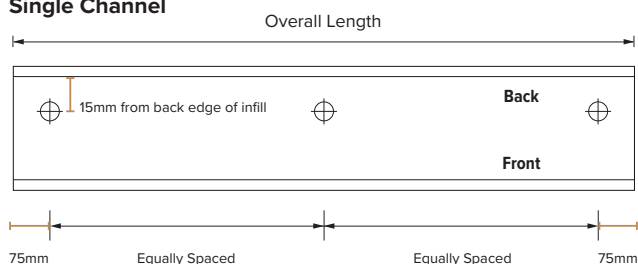

Double Channel - drill back channel only

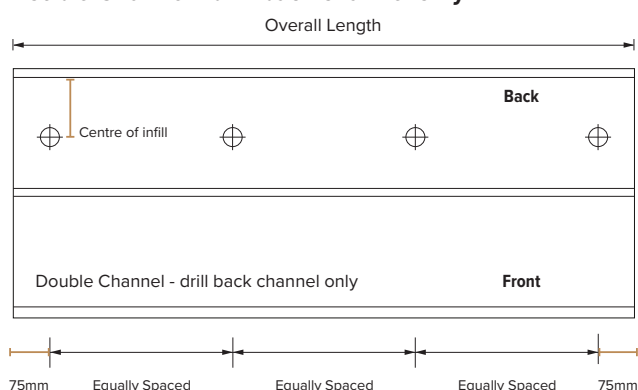



Installation - Mechanical Fix

If fixing inserts separate follow steps 1 – 6, remove release paper from channel and position insert ends flush applying pressure towards the centre finishing with hand roller to ensure adhesion.

**1**

Prepare surface, it must be clean, smooth and free of debris.

**2**

Position the profile, check the fit and mark the drill holes.

**3**

Drill and Plug to suit the screw size.

**4**

Apply adhesive as per manufacturer's instructions.

**5**

Position onto step.

**6**

Mechanically fix.

**7**

Insert plug.

**8**

Remove protective film when applicable.

Installation - Adhesive

Installer must follow individual manufacturers guidelines.

**1**

Prepare surface, it must be clean, smooth and free of debris.

**2**

Apply 5mm bead to the underside of the profile, 2 lines for Single and 3 for double channel.

**3**

Position, press and slide to ensure full bond.

**4**

Allow min. 1 hour after fixing. It is the contractor's responsibility to ensure the bond is secure before opening the area.

Installation - Easi-Lay Tape

For a simple installation solution try our Easi-Lay Tape

See page 186 for details





Slip Resistance

Slip-resistance tests have been independently undertaken by Lucideon Ltd using the pendulum and inclined platform test.

Inclined Platform Test DIN 51130:2010

The critical angle at which a test person reaches the limit of safe walking on an inclined plane is used as a measure of slip resistance.

International testing houses consider the following guidelines;

Ramp	Slip Potential
R9	High
R10	Normal
R11	Low
R12	Very Low

Pendulum Test BS 7976-2:2002

The energy absorbed by contact with the pre-set distance is read from a physical scale by a pointer that follows the overswing of the pendulum arm. 12 results are averaged to give the final pendulum number which is used to categorise the tile surface.

The UK slip resistance group recommends the following guidelines;

PTV	Slip Potential
0-24	High
25-35	Moderate
36+	Low

LRV's Clarification

In order to achieve a suitable contrast between different surfaces, ADM 2004 recommend at least a 30 point difference in the LRV's of the two contrasting surfaces.

RAL Clarification

Please note the RAL numbers stated are a guide only and cannot guarantee an exact match due to variables within the manufacturing process.

Tredsafe® Inserts

External



Slip Resistance Results

Inclined Platform Test DIN 51130:2010*

Incline 24.7°

Category R11

Pendulum Test BS 7976-2:2002#

Dry 57

Wet 47



Insert Colour	LRV	RAL
601 White	49.9	9003
616 Black	4.6	9004
621 Safety Blue	10.8	5015
643 Dolphin Grey	11.5	7000
647 Yellow	48.1	1012



Code
NITR38

Channel



Code
NITR50

Channel

*Average of Six Shod Results (Corrected). #PTV Average Value.

**Standard inserts not recommended for external use - contact Genesis for PTV result.



Standard Inserts

Slip Resistance Results

Inclined Platform Test
DIN 51130:2010*






Incline 22.9°

Category R11

Pendulum Test
BS 7976-2:2002#

Dry 66

Wet N/A**

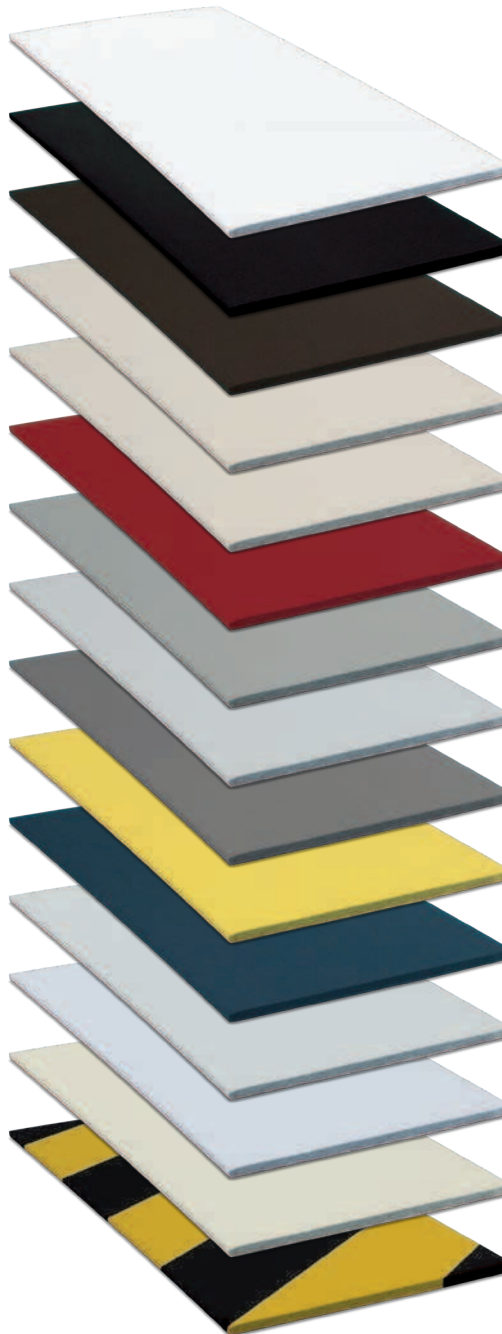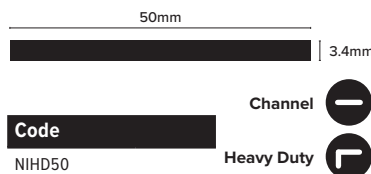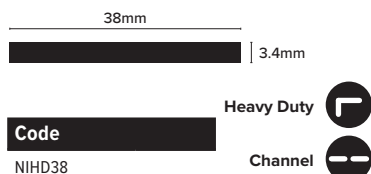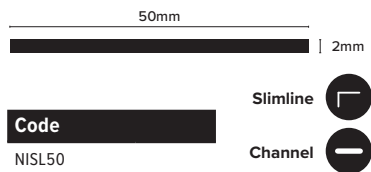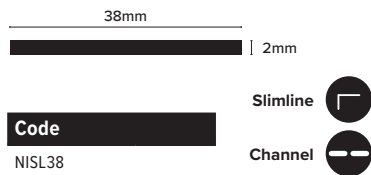

Insert Colour	LRV	RAL
01 White	79.9	9003
16 Black	4.5	9004
20 Brown	9.1	8014
25 Beige	41.1	1001
27 Canvas	53.21	7044
30 Red	10.6	3031
43 Dolphin Grey	27.6	7042
44 Ice Grey	42.1	7001
46 Midnight Grey	12.8	7024
47 Yellow	55.7	1018
48 Cobalt Blue	9.2	5000
58 Cloud	59	7047
68 Haze	66.2	860-2†
78 Sand	70.3	1013
120 Hazard	4.5 / 55.7	



*Average of Six Shod Results (Corrected). †PTV Average Value.

**Standard inserts not recommended for external use - contact Genesis for PTV result.

†RAL Effect.

All other RALs stated taken from RAL K7 Classic

Castellated Inserts

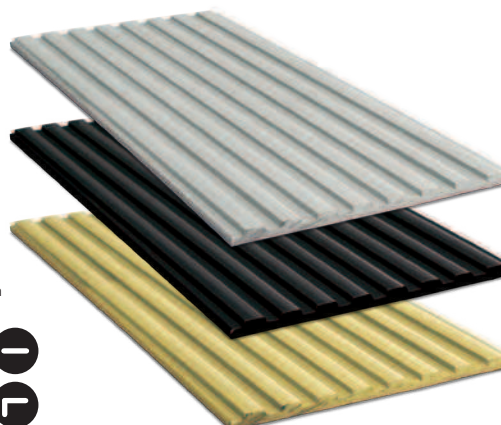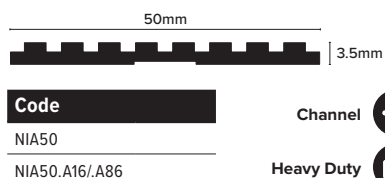

Insert Colour	LRV	RAL
80 Mill	78.9	
A16 Black	1	9005 Gloss
A86 Bright Brass	7	





External





This high-performance bonding tape from Genesis is manufactured from pressure sensitive adhesive which exhibits high levels of adhesion. Unlike many other rubber resin adhesive tapes, Easi-Lay Adhesive Tape is solvent free and has good UV resistance coupled with good peel strength. It is easy to use with a finger lift liner offering an instant high bond to most common materials from plastic, ceramics, metals, wood, and glass, and will bond to most common substrates including difficult to bond materials such as polyethylene and polypropylene.

NEZ50 is a fixing solution which increases the overall speed of installation, negates screw fixing, overcoming problematic substrates, and facilitates 'The Perfect Finish'.

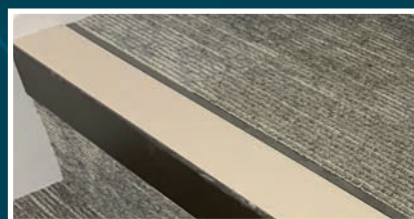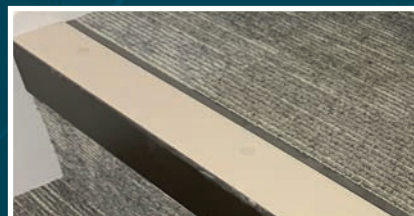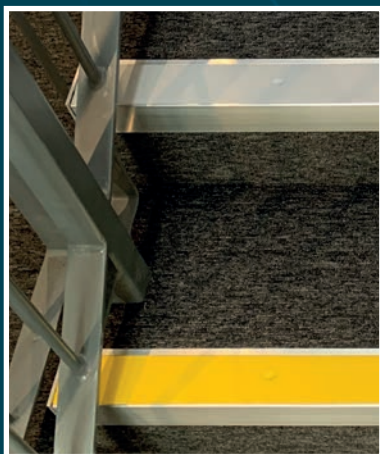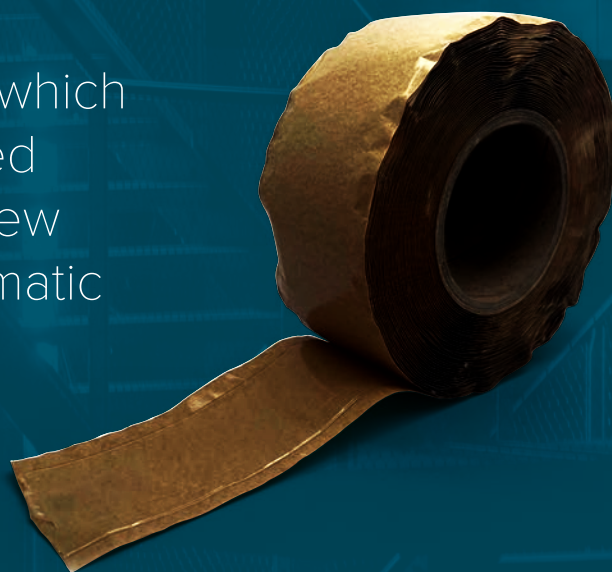

Book a stair measure today



**NEZ50** Easi-Lay Adhesive Tape

- Pressure sensitive adhesive
- Suitable for indoor and outdoor use
- Forms a strong waterproof bond
- Good UV resistance
- Indirect Food Approved FDA 21 CFR 175.105
- Easy to apply with finger lift liner
- Instant bonds with high levels of adhesion and cohesion
- Supplied in roll form for application by hand
- Solvent free
- UV resistant

Code

NEZ50

46mm



50m



Use



Self-Adhesive



INSTALLATION GUIDE

NSA Stair Edge Trim Pre-Formed / Landing Strip

Code	Qty
NSA290.16	10
NSA290.80	10

Code	Qty
NSA283.16	10
NSA283.80	10

350mm




350mm



350mm



350mm

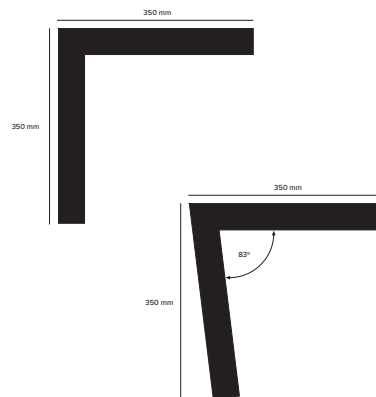

Aluminium



16

Black

80

Mill

NTL Side Profile

Code	Qty
NTL1.16	10
NTL1.80	10



2500mm



42mm




Side Profile Front Face

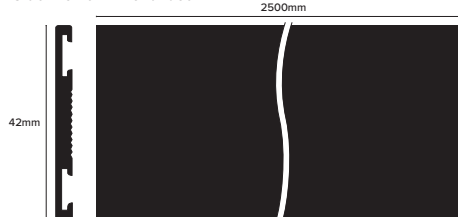**NTAB** Stair Edge Trim Clips

Code	Qty
NTAB1	20

Side Profile of NSA/NTL with NTAB1

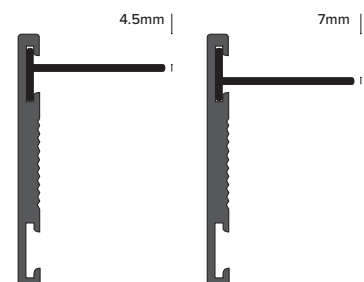



NXF/S Frontier



Aluminium



2.77m



Channel



Black

LRV: 4.7



Mill

LRV: 78.9



Bright
Brass

LRV: 64.3

Standard Insert



Black

LRV: 4.5




Ice Grey

LRV: 42.1



Yellow


LRV: 55.7

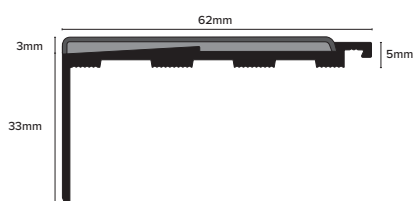

Code

NXF05.80


NXF05.A16/A86

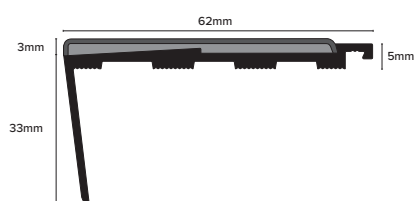

Code

NXF06.80


NXF06.A16/A86

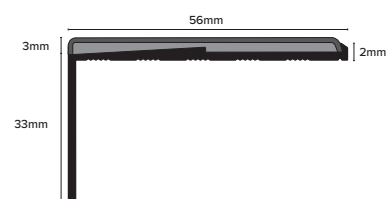

Code

NXFS01.80

NXFS01.A16/A86

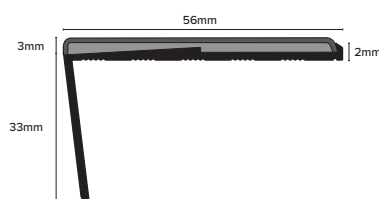

Code

NXFS02.80

NXFS02.A16/A86



Frontier Range



Straight & Rakeback Designs



Three Insert Options



Unique mechanism to secure the insert



Reduced dirt and minimal maintenance



Increased Foot Contact

to the slip resistant insert reducing the risk of slips, trips and falls on stairs. Designed to meet the guidance in Approved Document M and BS 8300-2:2018

Standard Range



Straight, Rakeback & Bullnose Designs



Over 20 Insert Options




Single or Double Channel
for light / heavy foot traffic



Available with **Aluminator®**




NSL Straight



Code

NSL01.80


NSL01.A16/A86

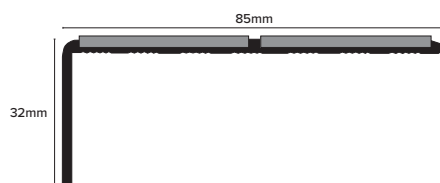

Code

NSL09.80


NSL09.A16/A86

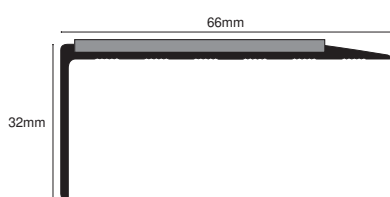

Code

NSL15.80


NSL15.A16/A86

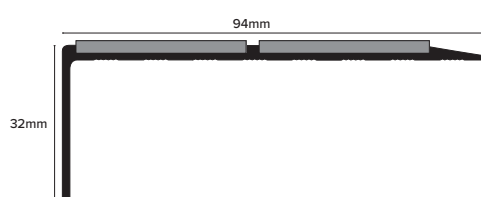

Code

NSL30.80


NSL30.A16/A86



Code

NSL19.80


NSL19.A16/A86

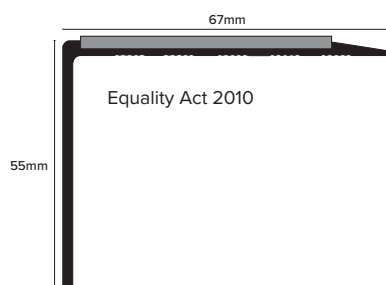

Code

NSL21.80

NSL21.A16/A86

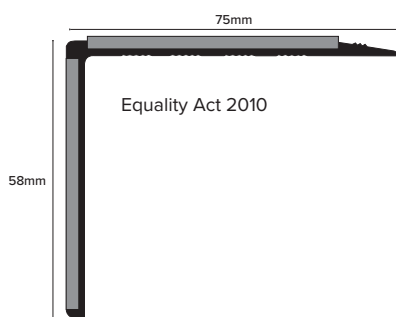

Code

NSL27.80

NSL27.A16/A86



Code

NSL23.80

NSL23.A16/A86

3m 16 47

Aluminium



Slimline


2.46m, 2.77m
& 3.22m*


On Request



*Excludes NSL23 (3m only)

Channel



A16

Black

LRV: 4.7



80

Mill

LRV: 78.9



A86

Bright Brass*

LRV: 64.3

*2.4m Max. Lengths

Standard Insert



01

White

LRV: 79.9



16

Black

LRV: 4.5



20

Brown

LRV: 9.1



25

Beige

LRV: 41.1



27

Canvas

LRV: 53.2



30

Red

LRV: 10.6



43

Dolphin Grey

LRV: 27.6



44

Ice Grey

LRV: 42.1



46

Midnight Grey

LRV: 12.8



47

Yellow

LRV: 55.7



48

Cobalt Blue

LRV: 9.2



58

Cloud

LRV: 59



68

Haze

LRV: 66.2



78

Sand

LRV: 70.3










120

Hazard




LRV: 4.5




NSL Rakeback

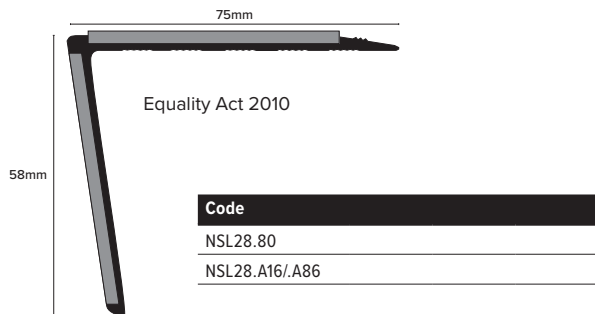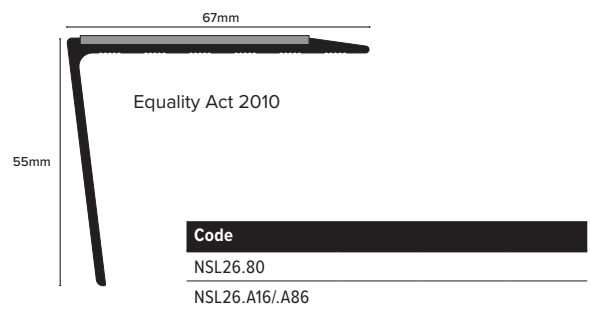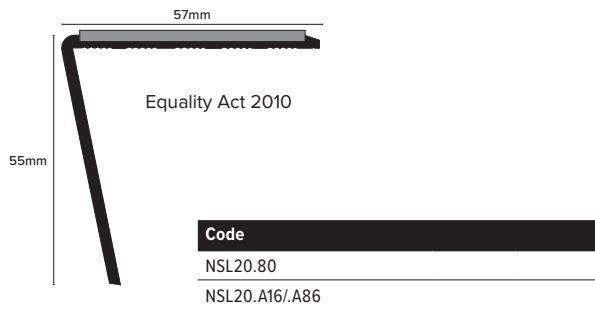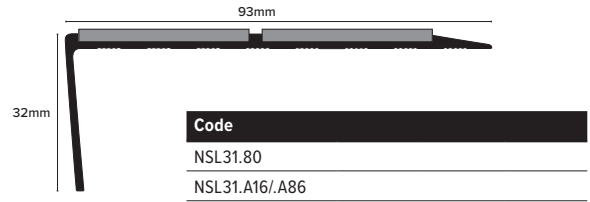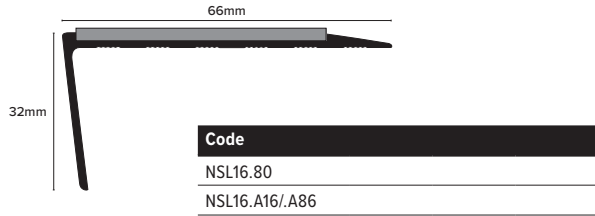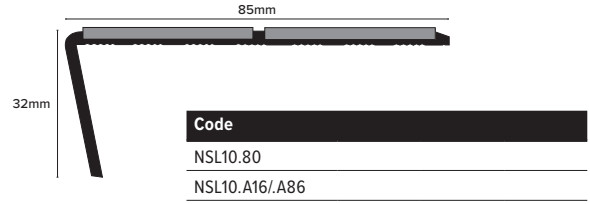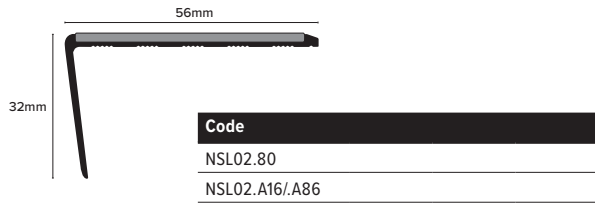


NSL Bullnose

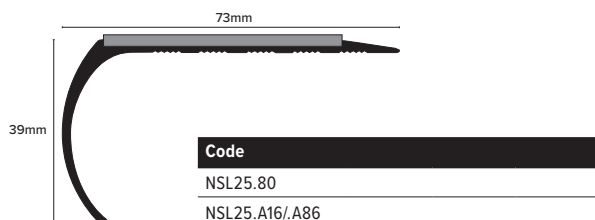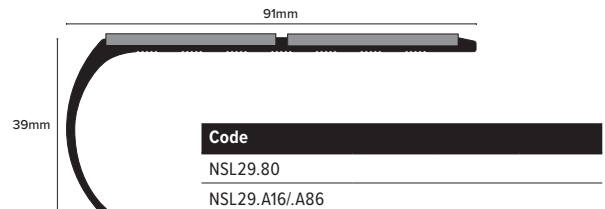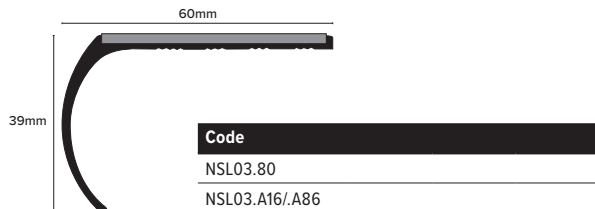

**NHD Straight****Code**


NHD05.80

NHD05.A16/.A86

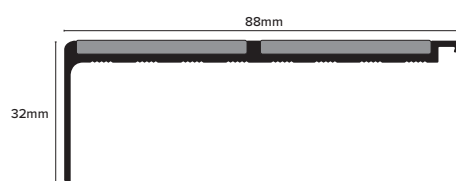**Code**


NHD11.80

NHD11.A16/.A86

**Code**


NHD17.80

NHD17.A16/.A86

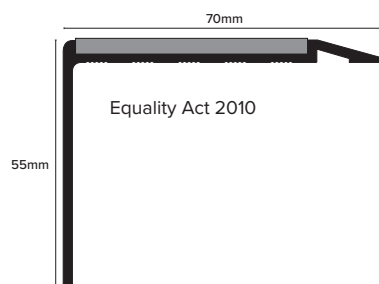**Code**


NHD22.80

NHD22.A16/.A86

NHD Rakeback**Code**


NHD06.80

NHD06.A16/.A86

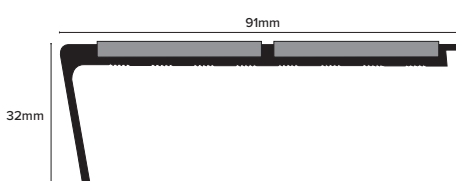**Code**

NHD12.80

NHD12.A16/.A86

**Code**

NHD24.80

NHD24.A16/.A86

Aluminium**Heavy Duty****2.46m, 2.77m
& 3.22m****On Request****Channel**

Black

LRV: 4.7



Mill

LRV: 78.9



Bright Brass*

LRV: 64.3

*2.4m Max. Lengths

Standard Insert

White

LRV: 79.9



Black

LRV: 4.5



Brown

LRV: 9.1



Beige

LRV: 41.1



Canvas

LRV: 53.2



Red

LRV: 10.6



Dolphin Grey

LRV: 27.6



Ice Grey

LRV: 42.1



Midnight Grey

LRV: 12.8



Yellow

LRV: 55.7



Cobalt Blue

LRV: 9.2



Cloud

LRV: 59



Haze

LRV: 66.2



Sand

LRV: 70.3



Hazard

LRV: 4.5

LRV: 55.7

Tredsafe® Insert

White

LRV: 49.9



Safety Blue

LRV: 10.8



Black

LRV: 4.6



Dolphin Grey

LRV: 11.5



Yellow


LRV: 48.1

NIA Insert

Mill


LRV: 78.9

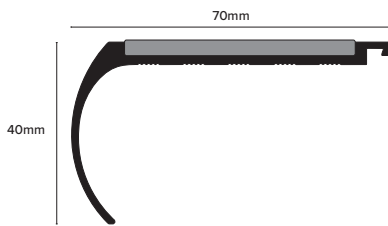

**NHD Bullnose****Code**


NHD07.80

NHD07.A16/.A86

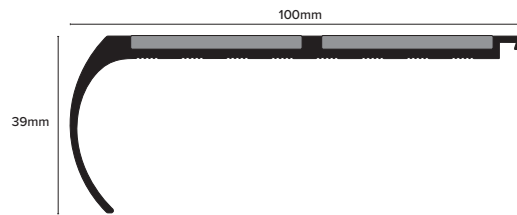**Code**


NHD13.80

NHD13.A16/.A86

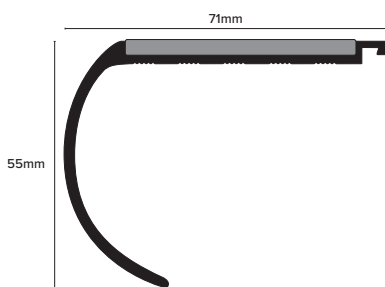**Code**

NHD08.80

NHD08.A16/.A86

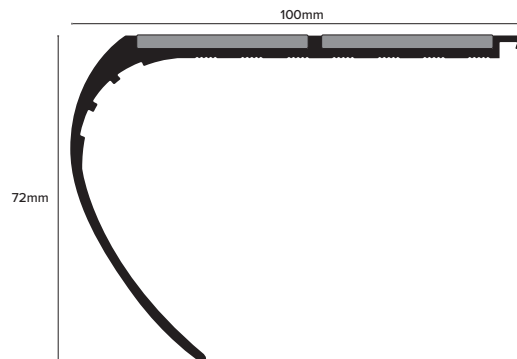**Code**

NHD33.80

NHD33.A16/.A86


NHD Accessories & Connectors

3.22m

Extender**Code**


NHDEXT.80

NHDEXT.A16/.A86

**Carpet Connector****Code**

NNL01.80

NNL01.A16/.A86

**Ramp Connector****Code**

NNL02.80

NNL02.A16/.A86

**Castellated Inserts**

External

**Code**


NIA50

NIA50.A16/.A86






ASL Straight



Code

ASL01.80


ASL01.A16/A86

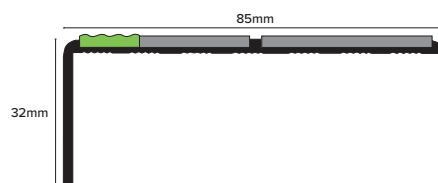

Code

ASL09.80


ASL09.A16/A86

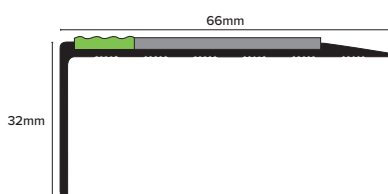

Code

ASL15.80


ASL15.A16/A86

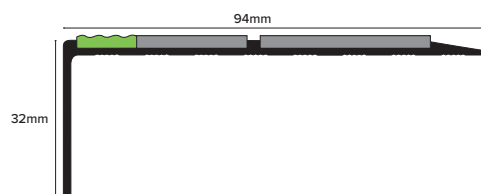

Code

ASL30.80


ASL30.A16/A86



Code

ASL19.80

ASL19.A16/A86

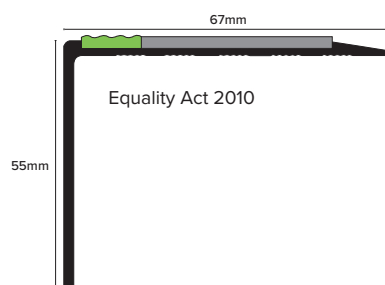

Code

ASL21.80


ASL21.A16/A86



Code

ASL27.80

ASL27.A16/A86

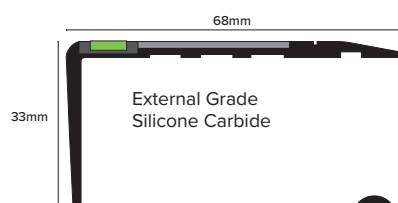

Code

AHD23.80

AHD23.A16/A86



Aluminium



Slimline



Aluminator®


2.46m, 2.77m
& 3.22m*


On Request



*Excludes AHD23 (3m only)

Channel



A16

Black

LRV: 4.7



80

Mill

LRV: 78.9



A86

Bright Brass*

LRV: 64.3

*2.4m Max. Lengths

Standard Insert



01

White

LRV: 79.9



16

Black

LRV: 4.5



20

Brown

LRV: 9.1



25

Beige

LRV: 41.1



27

Canvas

LRV: 53.2



30

Red

LRV: 10.6



43

Dolphin Grey

LRV: 27.6



44

Ice Grey

LRV: 42.1



46

Midnight Grey

LRV: 12.8



47

Yellow

LRV: 55.7



48

Cobalt Blue

LRV: 9.2



58

Cloud

LRV: 59



68

Haze

LRV: 66.2



78

Sand

LRV: 70.3



120

Hazard

LRV: 4.5

LRV: 55.7

Tredsafe® Insert



601

White

LRV: 49.9



621

Safety Blue

LRV: 10.8



616

Black

LRV: 4.6



643

Dolphin Grey

LRV: 11.5









647

Yellow




LRV: 48.1



ASL Rakeback

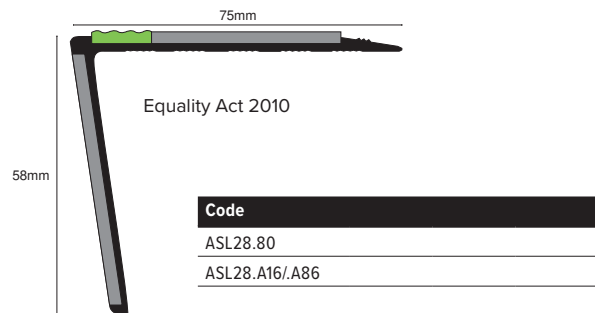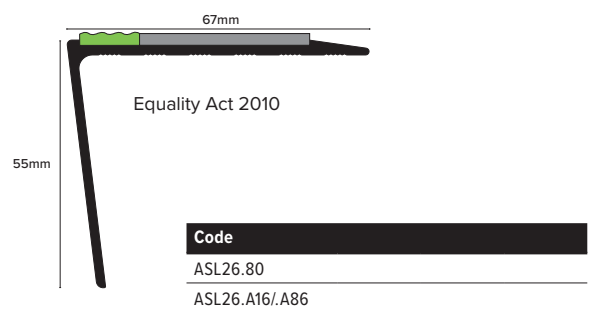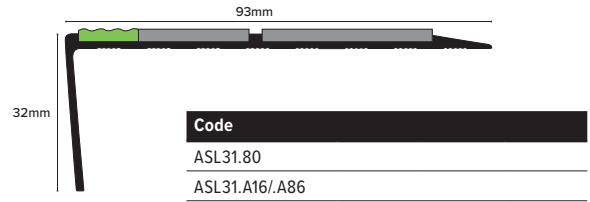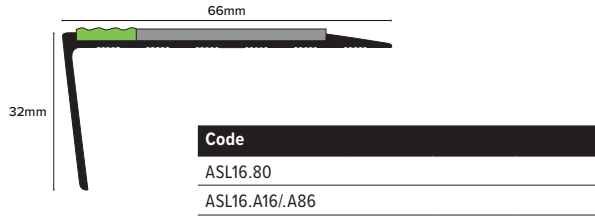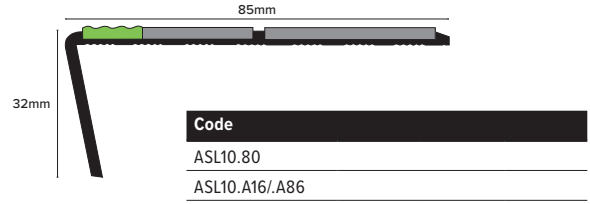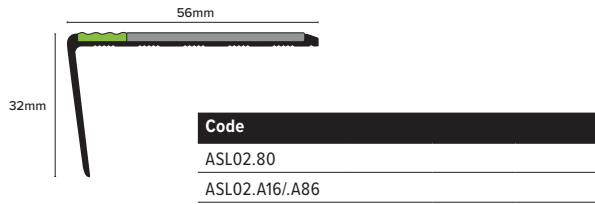


ASL Bullnose

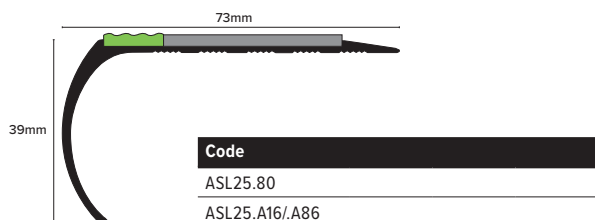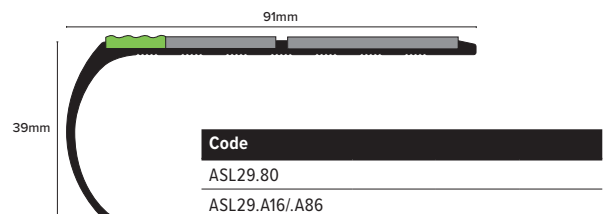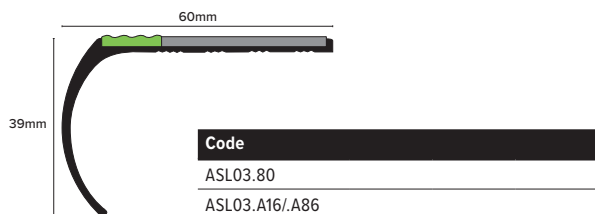




AHD Straight



Code

AHD05.80


AHD05.A16/A86

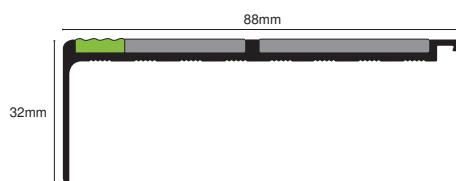

Code

AHD11.80


AHD11.A16/A86



Code

AHD17.80

AHD17.A16/A86

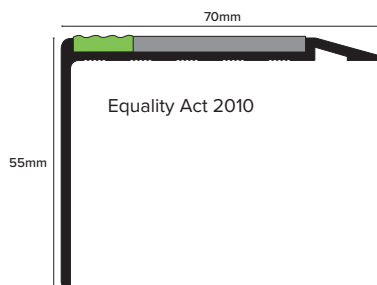


Code

AHD22.80

AHD22.A16/A86


AHD Rakeback



Code

AHD06.80


AHD06.A16/A86

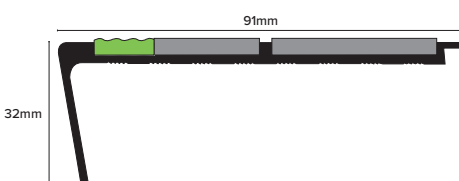

Code

AHD12.80

AHD12.A16/A86



Code

AHD24.80

AHD24.A16/A86

Aluminium



Heavy Duty



Aluminator®


2.46m, 2.77m
& 3.22m


On Request



Channel



Black

LRV: 4.7



Mill

LRV: 78.9



Bright Brass*

LRV: 64.3

*2.4m Max. Lengths

Standard Insert



White

LRV: 79.9



Black

LRV: 4.5



Brown

LRV: 9.1



Beige

LRV: 41.1



Canvas

LRV: 53.2



Red

LRV: 10.6



Dolphin Grey

LRV: 27.6



Ice Grey

LRV: 42.1



Midnight Grey

LRV: 12.8



Yellow

LRV: 55.7



Cobalt Blue

LRV: 9.2



Cloud

LRV: 59



Haze

LRV: 66.2



Sand

LRV: 70.3



Hazard

LRV: 4.5

LRV: 55.7

Tredsafe® Insert



White

LRV: 49.9



Safety Blue

LRV: 10.8



Black

LRV: 4.6



Dolphin Grey


LRV: 11.5



Yellow


LRV: 48.1

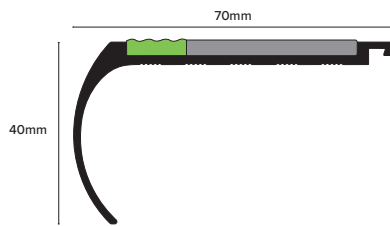

**AHD Bullnose****Code**


AHD07.80

AHD07.A16/.A86

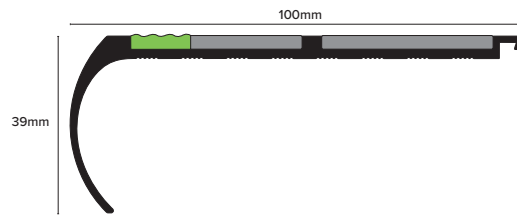**Code**


AHD13.80

AHD13.A16/.A86

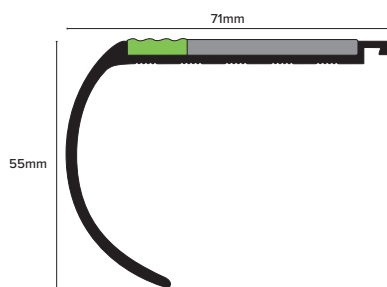**Code**

AHD08.80

AHD08.A16/.A86

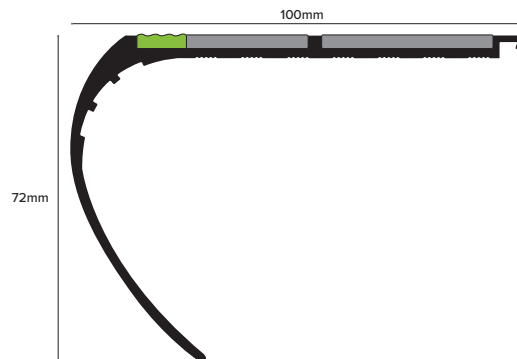**Code**

AHD33.80

AHD33.A16/.A86

AHD Accessories & Connectors

3.22m

**Extender****Code**


NHDEXT.80

NHDEXT.A16/.A86

**Carpet Connector****Code**

NNL01.80

NNL01.A16/.A86

**Ramp Connector****Code**


NNL02.80

NNL02.A16/.A86






Hard Nose P.V.C


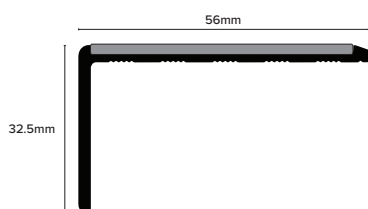


Code
NSP16

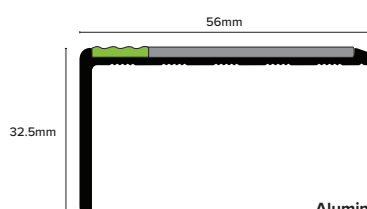


Code
ASP16

Aluminator®

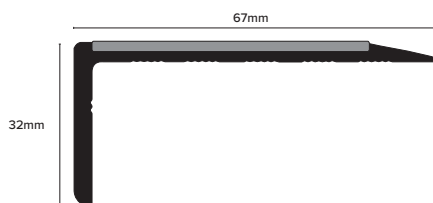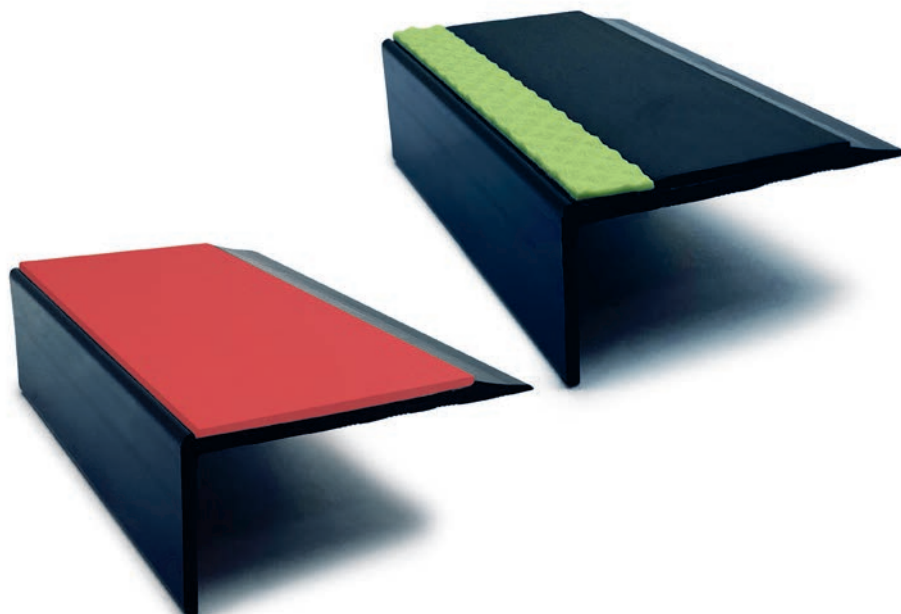

Code
NRP16

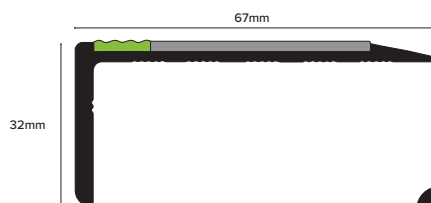

Code
ARP16

Aluminator®

PVC



Slimline



3.22m



Channel

16

Black
LRV: 4.7

Standard Insert

01

White
LRV: 79.9

16

Black
LRV: 4.5

20

Brown
LRV: 9.1

25

Beige
LRV: 41.1

27

Canvas
LRV: 53.2

30

Red
LRV: 10.6

43

Dolphin Grey
LRV: 27.6

44

Ice Grey
LRV: 42.1

46

Midnight Grey
LRV: 12.8

47

Yellow
LRV: 55.7

48

Cobalt Blue
LRV: 9.2

58

Cloud
LRV: 59

68

Haze
LRV: 66.2

78

Sand
LRV: 70.3

120

Hazard
LRV: 4.5
LRV: 55.7

Tredsafe® Insert

601

White
LRV: 49.9

621

Safety Blue
LRV: 10.8

616

Black
LRV: 4.6



643

Dolphin Grey
LRV: 11.5

647


Yellow
LRV: 48.1

Hard Nose P.V.C

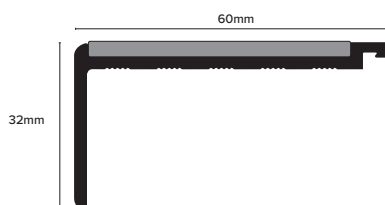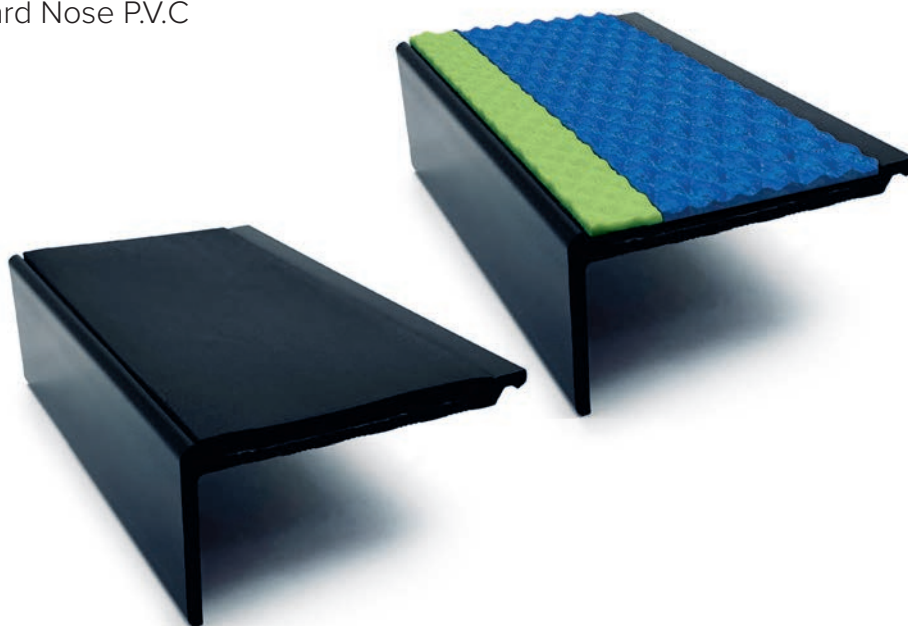

Code

NHP16

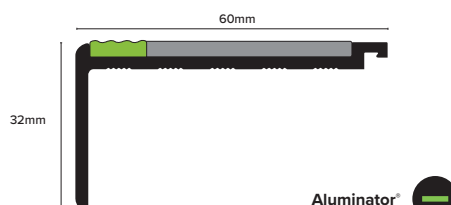

Code

AHP16

PVC



Heavy Duty



3.22m



Channel

16

Black
LRV: 4.7

Standard Insert

01

White
LRV: 79.9

16

Black
LRV: 4.5

20

Brown
LRV: 9.1

25

Beige
LRV: 41.1

27

Canvas
LRV: 53.2

30

Red
LRV: 10.6

43

Dolphin Grey
LRV: 27.6

44

Ice Grey
LRV: 42.1

46

Midnight Grey
LRV: 12.8

47

Yellow
LRV: 55.7

48

Cobalt Blue
LRV: 9.2

58

Cloud
LRV: 59

68

Haze
LRV: 66.2

78

Sand
LRV: 70.3

120

Hazard
LRV: 4.5
LRV: 55.7

Tredsafe® Insert

601

White
LRV: 49.9

621

Safety Blue
LRV: 10.8

616

Black
LRV: 4.6

643


Dolphin Grey
LRV: 11.5

647

Yellow
LRV: 48.1



NFL Flexible

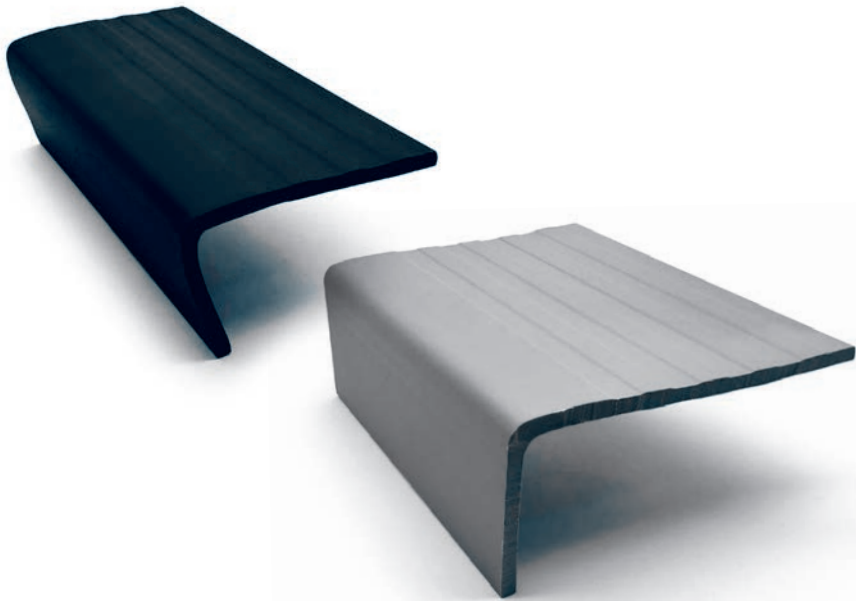

PVC



2.75m



16





Black

LRV: 4.5



43


Dolphin Grey

LRV: 26.99

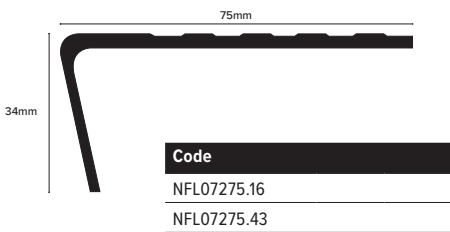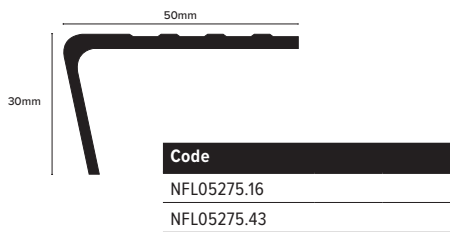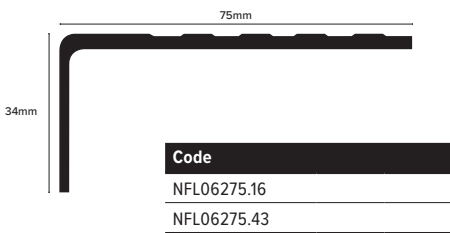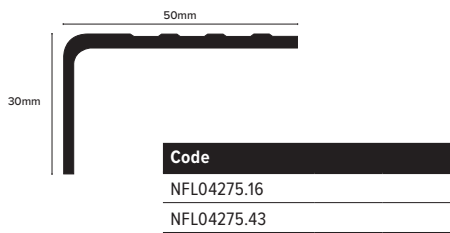


NFL Ramp Back

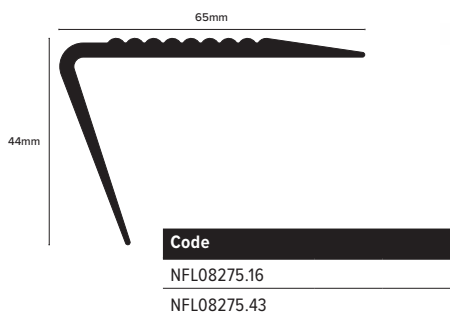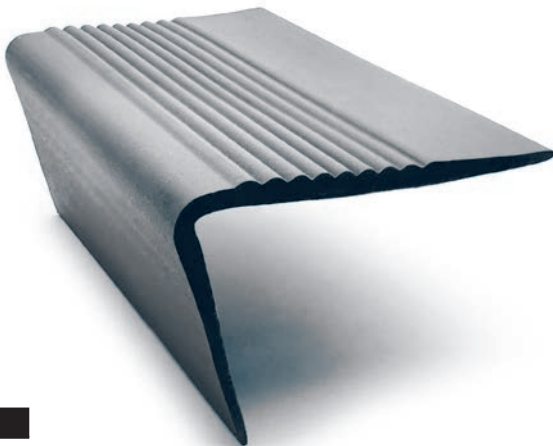

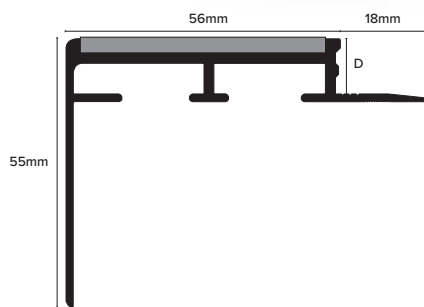**NTC & ATC Ceramic Tile-In Edges**

Code	D (mm)
NTC10	10
NTC12	12

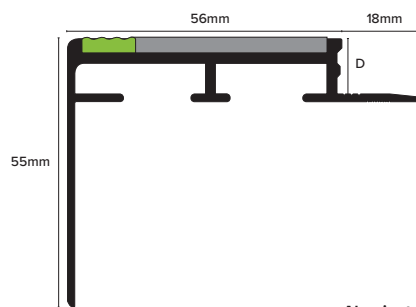

Code	D (mm)
ATC10	10
ATC12	12

Aluminator®

Castellated Inserts

External

Code
NIA50
NIA50.A16/A86



Aluminium



Heavy Duty



3.22m



Tile-In

**Channel**

81

Matt
Silver**Standard Insert**

01

White
LRV: 79.9

16

Black
LRV: 4.5

20

Brown
LRV: 9.1

25

Beige
LRV: 41.1

27

Canvas
LRV: 53.2

30

Red
LRV: 10.6

43

Dolphin
Grey
LRV: 27.6

44

Ice Grey
LRV: 42.1

46

Midnight
Grey
LRV: 12.8

47

Yellow
LRV: 55.7

48

Cobalt
Blue
LRV: 9.2

58

Cloud
LRV: 59

68

Haze
LRV: 66.2

78

Sand
LRV: 70.3

120

Hazard
LRV: 4.5
LRV: 55.7**Tredsafe® Insert**

601

White
LRV: 49.9

621

Safety
Blue
LRV: 10.8

616

Black
LRV: 4.6

643

Dolphin
Grey
LRV: 11.5

647



Yellow
LRV: 48.1**NIA Insert**

80

Mill
LRV: 78.9



NTS & ATS Ceramic Tile-In Edges

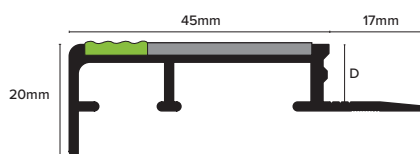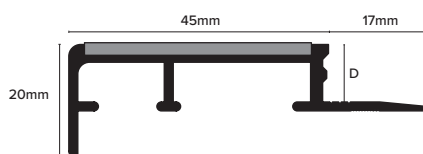

Aluminator®

Code	D (mm)	Qty
NTS108	10	5
NTS10	10	5
NTS128	12.5	5
NTS12	12.5	5

Code	D (mm)	Qty
ATS108	10	5
ATS10	10	5
ATS128	12.5	5
ATS12	12.5	5

When ordering, please advise code using the following guide
Code + .Insert Colour

E.g. NTS108.01 = 10mm NTS Nosing in 2.8m length with White Insert
NTS10.16 = 10mm NTS Nosing in bespoke length with Black Insert

Aluminium



Slimline



2.8m



Channel

81

Matt Silver

Standard Insert

01

White
LRV: 79.9

16

Black
LRV: 4.5

20

Brown
LRV: 9.1

25

Beige
LRV: 41.1

27

Canvas
LRV: 53.2

30

Red
LRV: 10.6

43

Dolphin Grey
LRV: 27.6

44

Ice Grey
LRV: 42.1

46

Midnight Grey
LRV: 12.8

47

Yellow
LRV: 55.7

48

Cobalt Blue
LRV: 9.2

58

Cloud
LRV: 59

68

Haze
LRV: 66.2

78

Sand
LRV: 70.3

120

Hazard
LRV: 4.5
LRV: 55.7

Tredsafe® Insert

601

White
LRV: 49.9

621

Safety Blue
LRV: 10.8

616

Black
LRV: 4.6


643

Dolphin Grey
LRV: 11.5

647

Yellow
LRV: 48.1

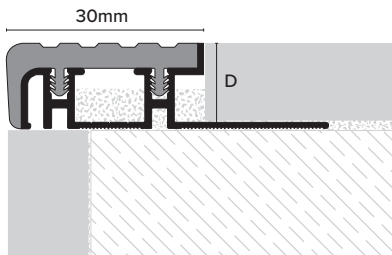

**NIB** PVC Edge

Code	D (mm)	Qty
NIB106.16	10	10
NIB106.35	10	10
NIB126.16	12.5	10
NIB126.35	12.5	10

End Caps

Code	Pack
NUC102.16	2
NUC102.35	2



Aluminium



2.5m




16

Black

35

Dark Grey

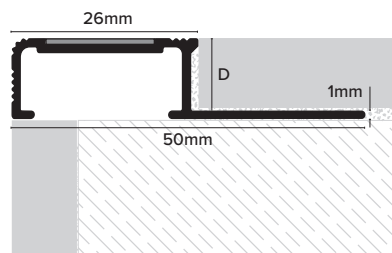NLC Carbide Edge


Code	D (mm)	Qty
NLC106.81	10	10
NLC126.81	12.5	10



Aluminium



2.6m

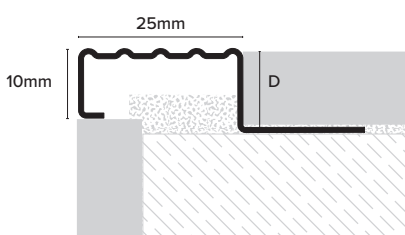**NSS** Superior

Code	D (mm)	Qty
NSS106.84	10	10
NSS126.84	12	10



Stainless Steel




2.5m






NLT Eco Edge



Code	D (mm)	Qty
NLT108.81	10	10
NLT128.81	12.5	10

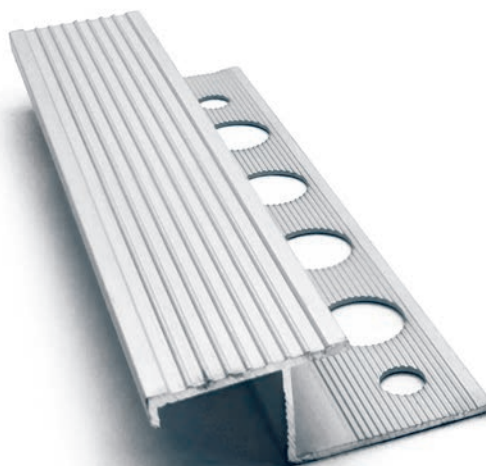


Aluminium



2.8m



NAT Bullnose

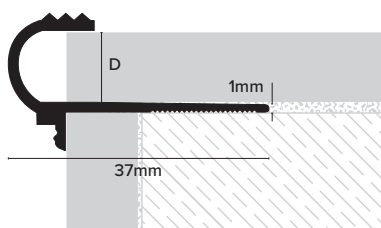

Code	D (mm)	Qty
NAT105.81	10	20
NAT125.81	12	20




Aluminium



2.6m



NFA Aluminium Formable 2 in 1

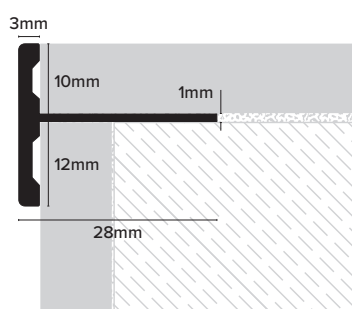

Code	Qty
NFA125.91	20




Aluminium




2.6m

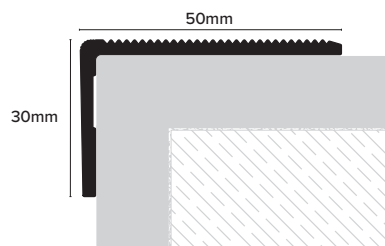

**NRA Retro**


Code	Qty
NRA50277.80	10

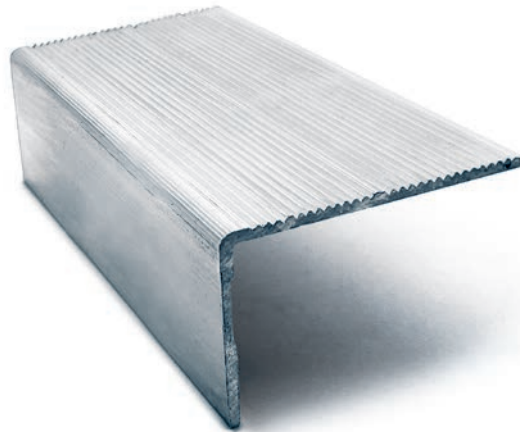


Aluminium



2.77m

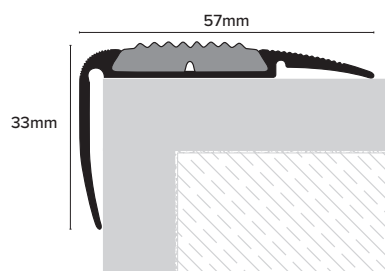**NRE Retro with Black Rubber Insert**

Code	Qty
NRE05277.16	10

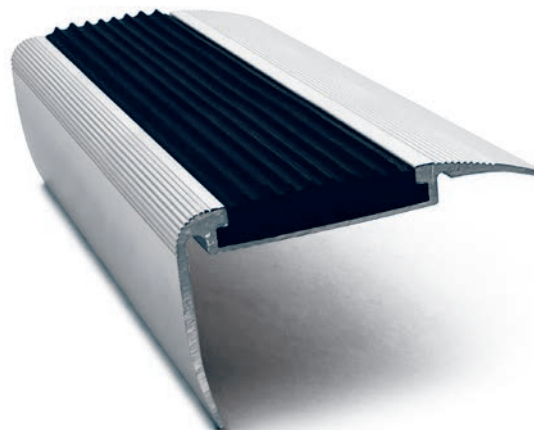

Aluminium



2.7m





Leading Tech Company, Singapore

Project Specifications

Products Specified: KAA607

Colours: 81 Matt Silver


Sector: Commercial

Project Description

As part of planned investment to expand its operations, the regional campus of this Leading Tech Company in Singapore underwent a major transformation.

Genesis KAA was supplied as an anodised Aluminium Skirting solution, ideal for use where a modern, hi-tech finish is required and accompanied by end caps, junctions and internal/external corners, the perfect finish has been achieved with this installation.

The profile is designed to sit on top of the floor covering in order to provide a neat finish, it can be used with most types of floor covering including carpets, resilient flooring, stone, wood, wood laminate and ceramic tiles.

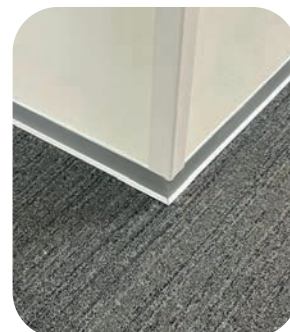


Floor Trims & Transitions



Genesis
The Perfect Finish



TVN Step Edge

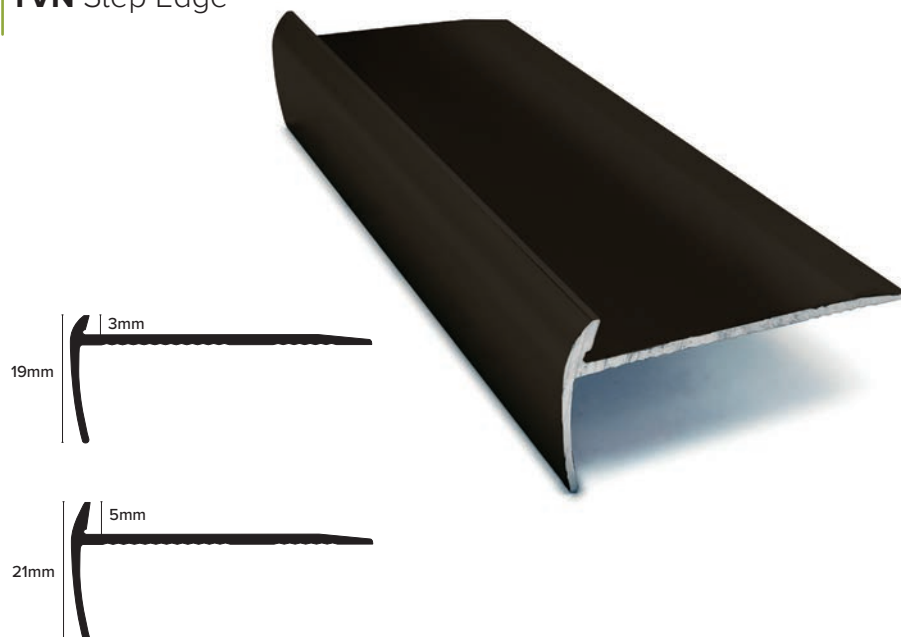

Code	D (mm)	Qty
TVN037.17	3	10
TVN037.81	3	10
TVN037.89	3	10
TVN037.91	3	10
TVN037.94	3	10

Code	D (mm)	Qty
TVN057.17	5	10
TVN057.81	5	10
TVN057.89	5	10
TVN057.91	5	10
TVN057.94	5	10

Aluminium



2.7m



Step Edge



17

Matt
Black

81

Matt
Silver


89

Bronze


91

Bright
Silver

94

Brushed
Silver


TVB Vinyl Bullnose

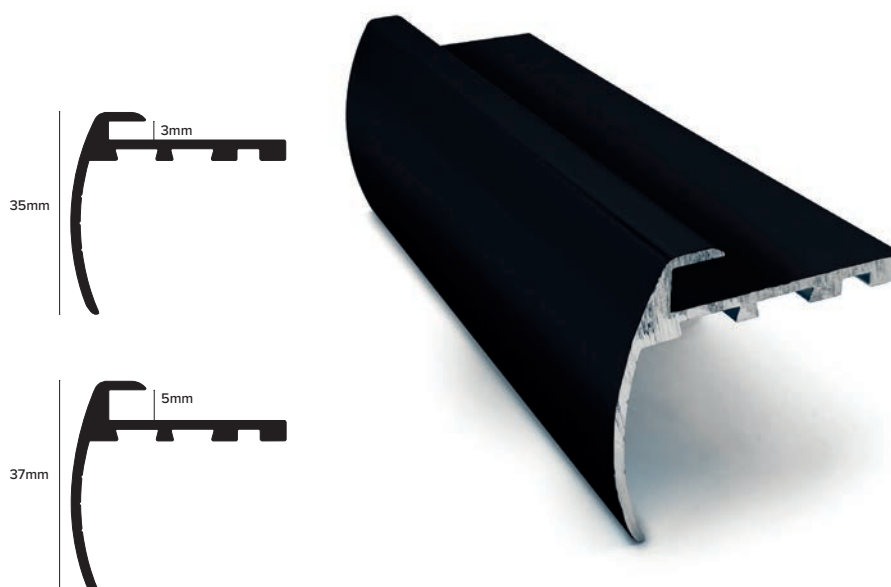

Code	D (mm)	Qty
TVB037.17	3	10
TVB037.81	3	10
TVB037.89	3	10
TVB037.91	3	10
TVB037.94	3	10

Code	D (mm)	Qty
TVB057.17	5	10
TVB057.81	5	10
TVB057.89	5	10
TVB057.91	5	10
TVB057.94	5	10

Aluminium



2.7m



Nosing



17

Matt
Black

81

Matt
Silver


89




Bronze

91

Bright
Silver

94

Brushed
Silver

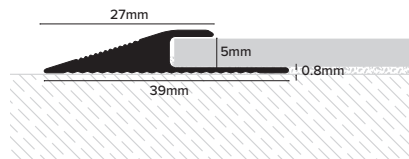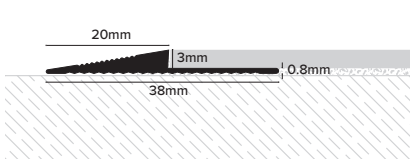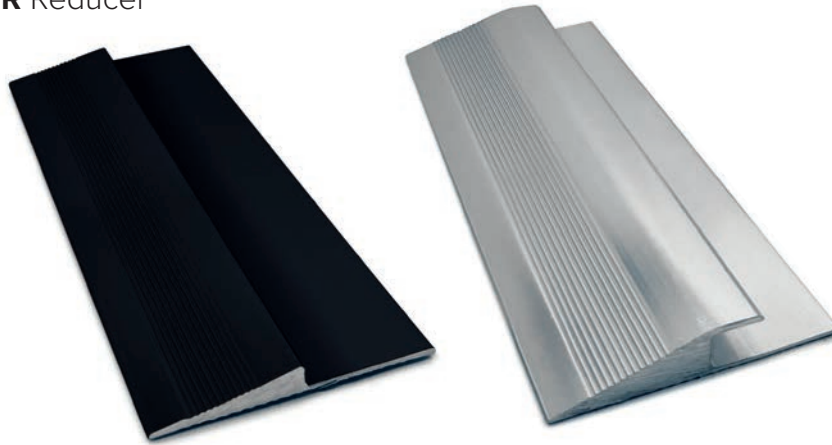
**TVR Reducer**

Code	D (mm)	Qty
TVR037.17	3	10
TVR037.81	3	10
TVR037.89	3	10
TVR037.91	3	10
TVR037.94	3	10

Code	D (mm)	Qty
TVR057.17	5	10
TVR057.81	5	10
TVR057.89	5	10
TVR057.91	5	10
TVR057.94	5	10

Aluminium**2.7m****Reducer****17**Matt
Black**81**Matt
Silver**89**

Bronze


91Bright
Silver**94**Brushed
Silver**TVE End Profile**

Code	D (mm)	Qty
TVE037.17	3	10
TVE037.81	3	10
TVE037.89	3	10
TVE037.91	3	10
TVE037.94	3	10

Code	D (mm)	Qty
TVE057.17	5	10
TVE057.81	5	10
TVE057.89	5	10
TVE057.91	5	10
TVE057.94	5	10

Aluminium**2.7m****17**Matt
Black**81**Matt
Silver**89**

Bronze

91Bright
Silver**94**Brushed
Silver



TVC External Corner



Code	Qty
TVC037.17	10
TVC037.81	10
TVC037.89	10
TVC037.91	10
TVC037.94	10

Aluminium



2.7m



3mm



Corner



17

Matt
Black

81

Matt
Silver

89

Bronze


91

Bright
Silver

94

Brushed
Silver

TVI Internal Corner

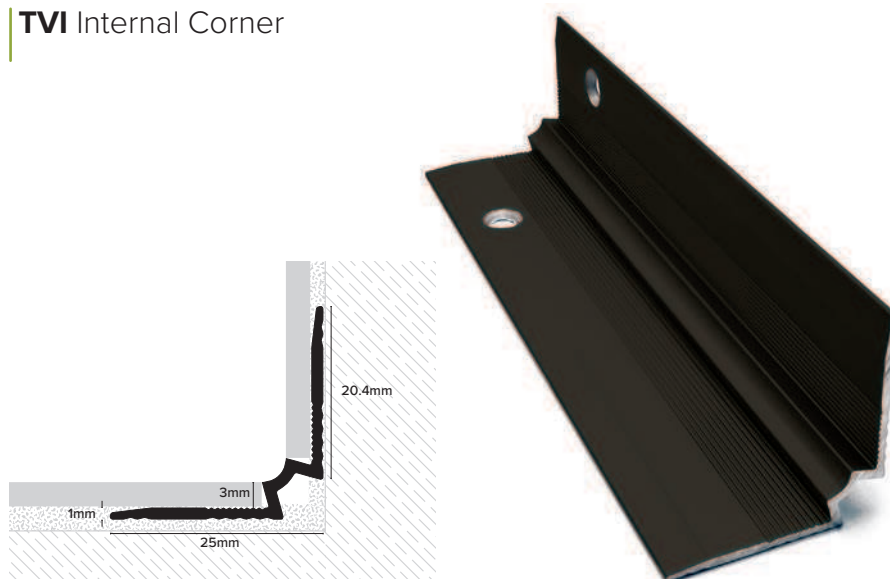

Code	Qty
TVI037.81	10
TVI037.89	10
TVI037.91	10

Aluminium



2.7m



3mm



Internal



81



Matt
Silver

89

Bronze

91

Bright
Silver

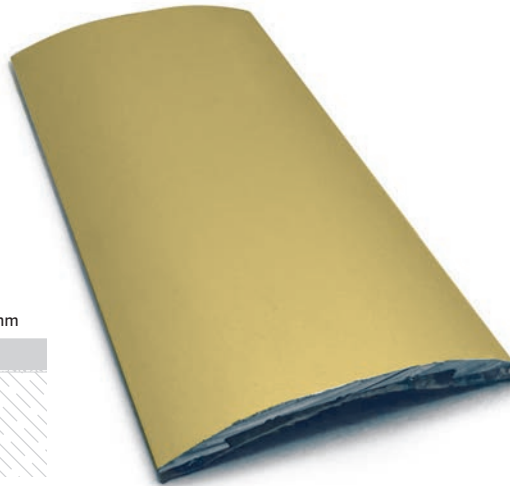
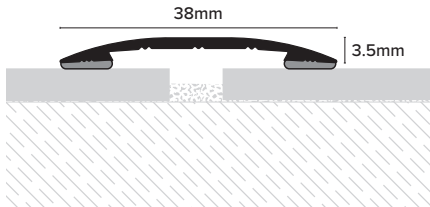
**CAS Eurocover Strip**

Code	Qty
CAS407.17	20
CAS407.40	20
CAS407.81	20
CAS407.83	20
CAS407.89	20
CAS407.91	20
CAS407.94	20

2.7m

Code	Qty
CAS409.17	20
CAS409.40	20
CAS409.81	20
CAS409.83	20
CAS409.89	20
CAS409.91	20
CAS409.94	20
CAS409.401	20
CAS409.411	20
CAS409.414	20
CAS409.425	20

0.9m

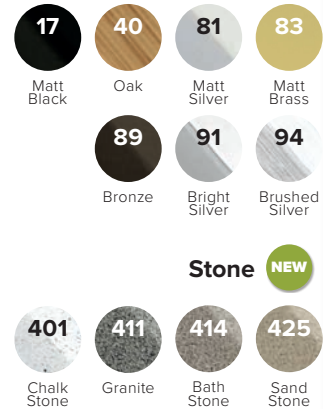
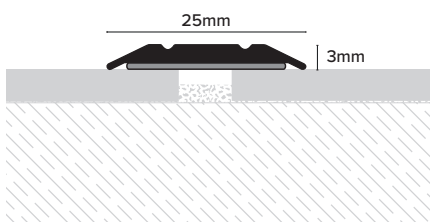
Aluminium **3mm** **Cover** **CAS Cover**

Code	Qty
CAS257.81	20

Aluminium **2.7m** **3mm** **Cover** 



TAS Ramp

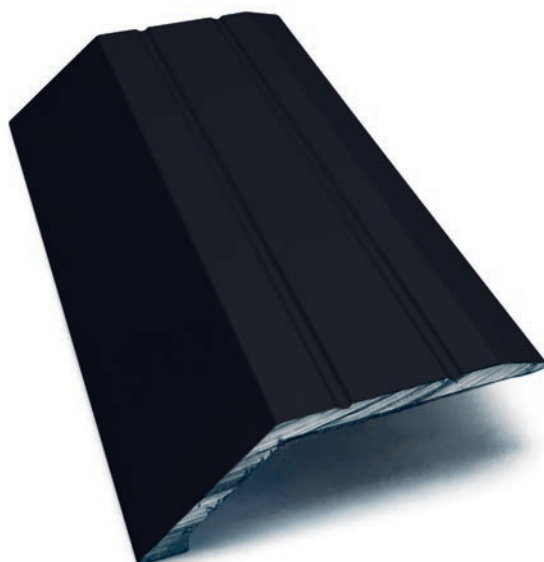


Code	Qty
TAS087.17	10
TAS087.81	10
TAS087.83	10

2.7m

Code	Qty
TAS089.17	10
TAS089.81	10
TAS089.83	10

0.9m




Code	Qty
TAS107.17	10
TAS107.40	10
TAS107.81	10
TAS107.83	10

2.7m

Code	Qty
TAS109.17	10
TAS109.40	10
TAS109.81	10
TAS109.83	10

0.9m

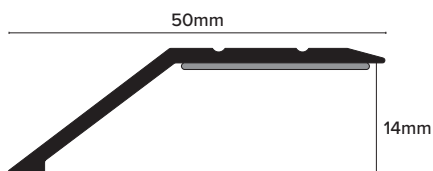

Code	Qty
TAS147.81	10
TAS147.83	10

2.7m

Code	Qty
TAS149.40	10
TAS149.81	10
TAS149.83	10

0.9m

Aluminium



Ramp



17

Matt
Black


40

Oak

81




Matt
Silver

83

Matt
Brass




NAS Nosing

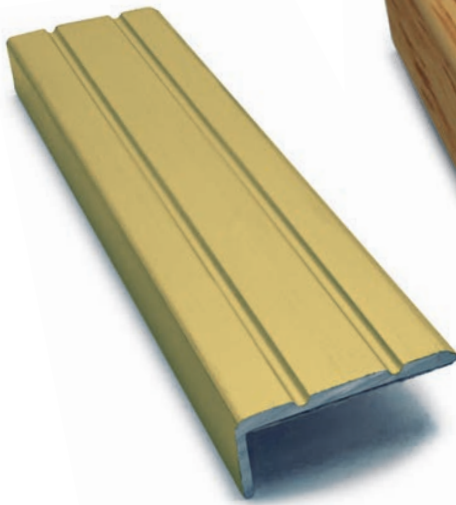

Code	Qty
NAS107.40	10
NAS107.81	10
NAS107.83	10

2.7m

Code	Qty
NAS109.40	10
NAS109.81	10
NAS109.83	10

0.9m

Code	Qty
NAS207.17	10
NAS207.40	10
NAS207.81	10
NAS207.83	10

2.7m

Code	Qty
NAS209.17	10
NAS209.40	10
NAS209.81	10
NAS209.83	10

0.9m

Aluminium

Nosing

17

Matt Black

40


Oak

81

Matt Silver



83

Matt Brass





TVS Reducer

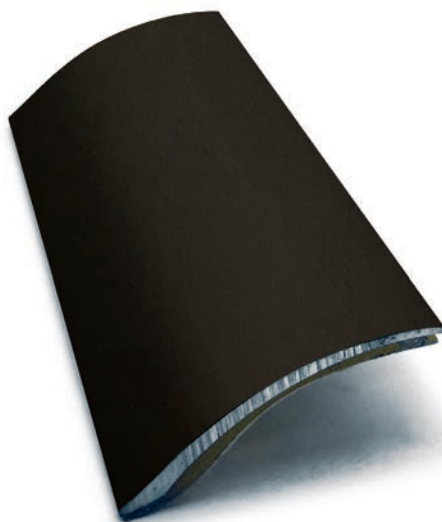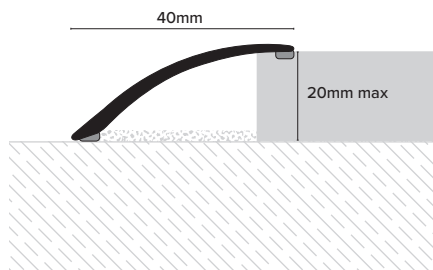

Code	Qty	2.7m
TVS257.17	10	
TVS257.40	10	
TVS257.81	10	
TVS257.83	10	
TVS257.89	10	
TVS257.91	10	
TVS257.94	10	

Code	Qty	0.9m
TVS259.17	10	
TVS259.40	10	
TVS259.81	10	
TVS259.83	10	
TVS259.89	10	
TVS259.91	10	
TVS259.94	10	

Aluminium



Max. 20mm



Reducer



17

Matt Black

40

Oak

81

Matt Silver

83

Matt Brass

89

Bronze



91

Bright Silver

94

Brushed Silver

TAV Vinyl / LVT Ramp

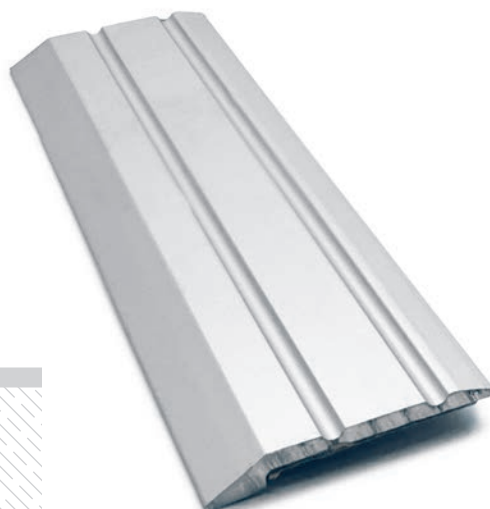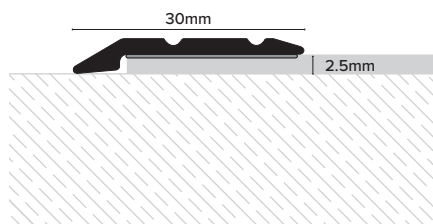

Code	Qty	2.7m
TAV257.81	10	
TAV257.83	10	

Code	Qty	0.9m
TAV259.81	10	
TAV259.83	10	

Aluminium



2.5mm



Ramp





81


Matt Silver

83


Matt Brass

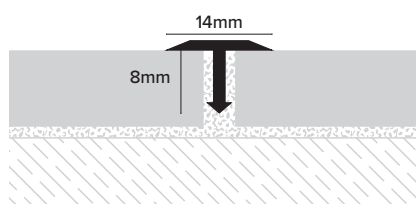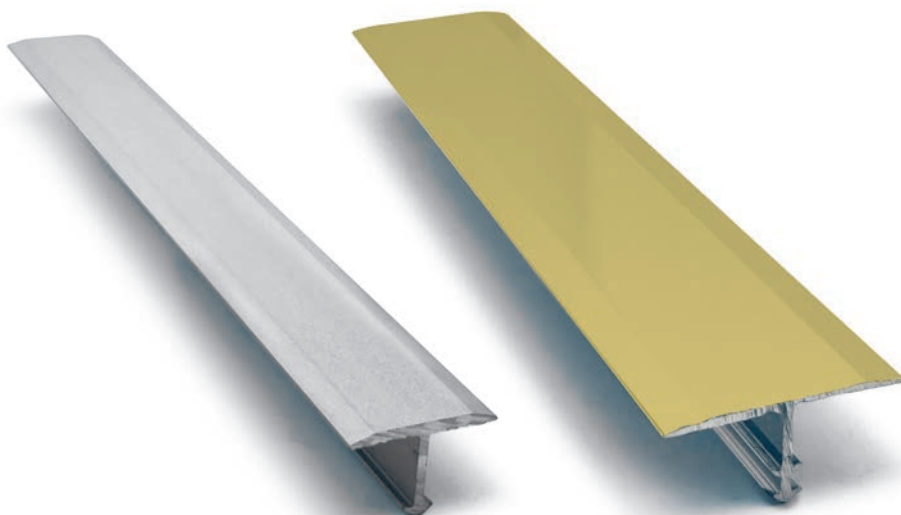**EDA** Dividing Strips

Code	Qty
EDA147.81	20

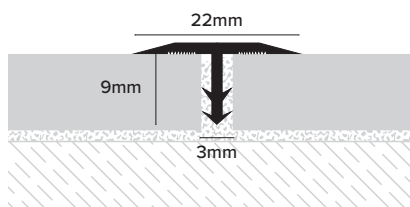

Code	Qty
EDA408.81	20
EDA408.83	20
EDA408.91	20

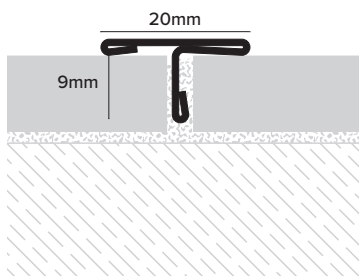Aluminium**2.7m****81**Matt
Silver**83**Matt
Brass**91**Bright
Silver**EDS** Stainless Steel Dividing Strips

Code	Qty
EDS209.84	10
EDS209.102	10

Stainless Steel**2.5m****84**




Steel

102

Brushed



RSA & RUA Ramp

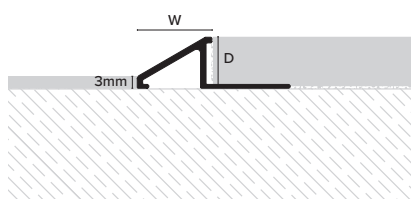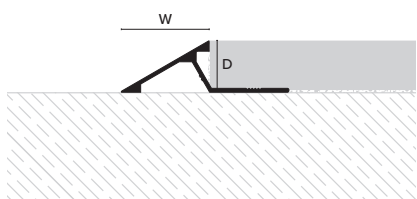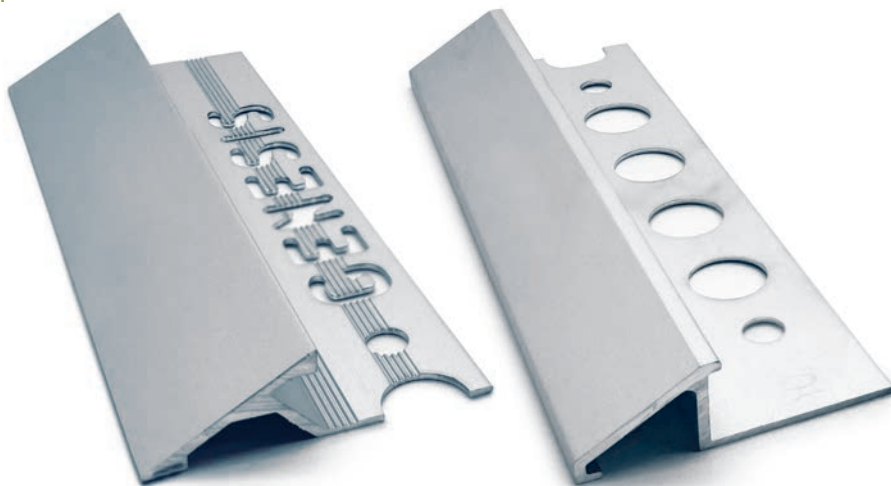

Code	W x D (mm)	Qty
RSA104.81	20 x 10	20
RSA124.81	23 x 12	20

Code	W x D (mm)	Qty
RUA104.81	16 x 10	20
RUA124.81	19 x 12	20

Aluminium




2.5m



Tile-In



RSS Ramp

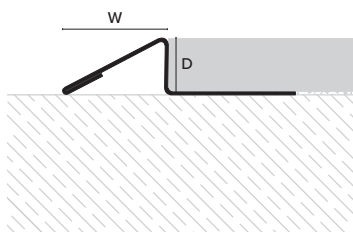

Code	W x D (mm)	Qty
RSS104.84	20 x 10	10
RSS124.84	25 x 12.5	10

Stainless Steel





2.5m



Tile-In

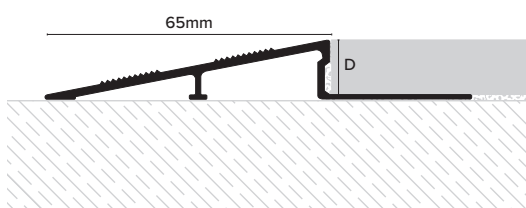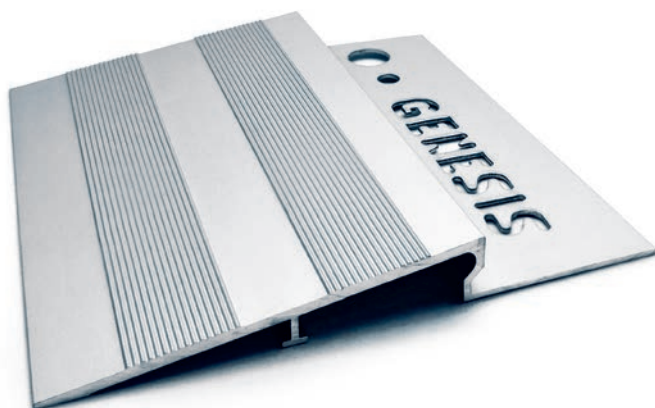

**RAA** Access Ramp

Code	D (mm)	Qty
RAA104.81	10	10
RAA124.81	12.5	10


Aluminium



2.5m



Tile-In

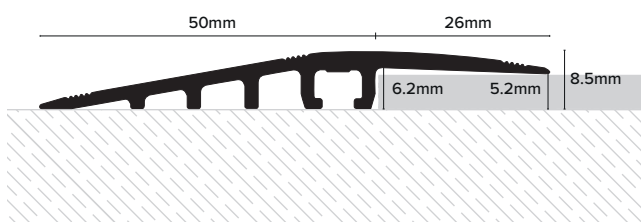**RAW** Heavy Duty Reducer

Code	Qty
RAW057.81	10

Aluminium



2.7m





Retro-Fit





TVA Vinyl Reducer

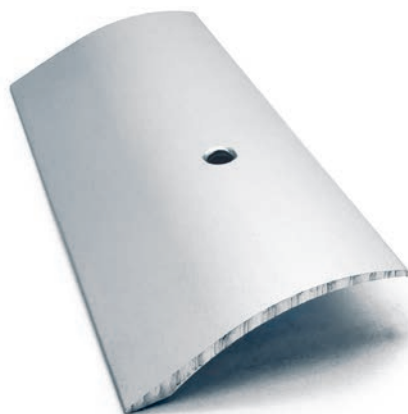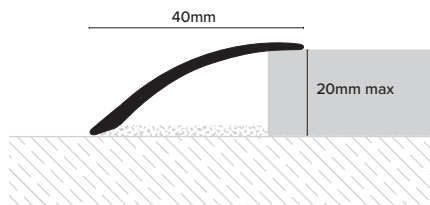

Code	Qty
TVA258.81	10

Aluminium



Max. 20mm



2.8m




Retro-Fit



RAR Reducer

For carpet tiles, loose lay PVC tiles etc.

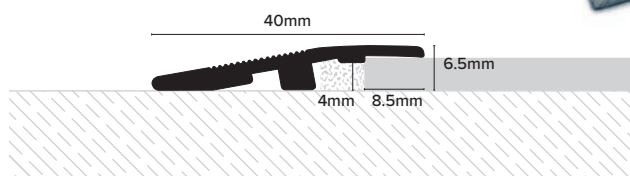

Code	Qty
RAR077.81	10

Aluminium




2.7m



Retro-Fit



For easy access with pallet trucks, trolleys and wheelchairs.

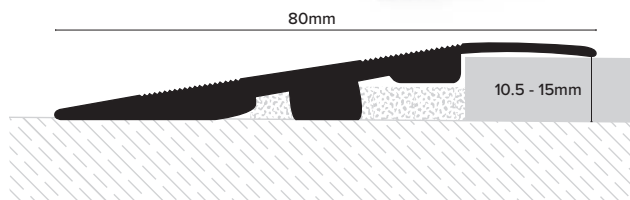


Use with
TrakMat[®]

See page 231-238

Code	Qty
RAR157.81	10



RAR Heavy Duty Reducer

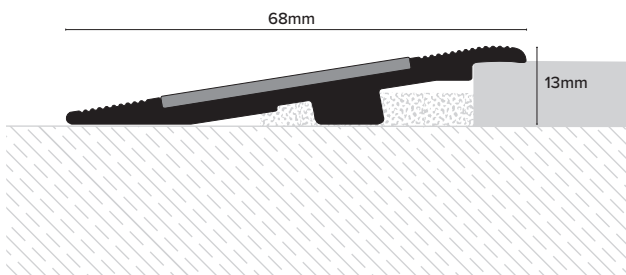

Code	Qty
RAR107	10

When ordering, please advise code using the following guide
Code + .Insert Colour

E.g. RAR107.01 = Ramp with White Insert



Aluminium



2.7m



Retro-Fit



Standard Insert

01

White
LRV: 79.9

16

Black
LRV: 4.5

20

Brown
LRV: 9.1

25

Beige
LRV: 41.1

27

Canvas
LRV: 53.2

30

Red
LRV: 10.6

43

Dolphin
Grey
LRV: 27.6

44

Ice Grey
LRV: 42.1

46

Midnight
Grey
LRV: 12.8

47

Yellow
LRV: 55.7

48

Cobalt
Blue
LRV: 9.2

58

Cloud
LRV: 59

68

Haze
LRV: 66.2

78

Sand
LRV: 70.3

120

Hazard
LRV: 32.8

Tredsafe® Insert

601

White
LRV: 49.9

621

Safety
Blue
LRV: 10.8

616

Black
LRV: 4.6

643

Dolphin
Grey
LRV: 11.5

647

Yellow
LRV: 48.1

Use with
TrakMat®
See page 231-238



RDIM Diminishing Strip

PVC




16

Black


43

Dolphin
Grey



Code	Qty
RDIM20.16	10




Code	Qty
RDIM25.16	10




Code	Qty
RDIM45.16	20



Code	Qty
RDIM60.16	20



Code	Qty
RDIM64.16	10
RDIM64.43	10

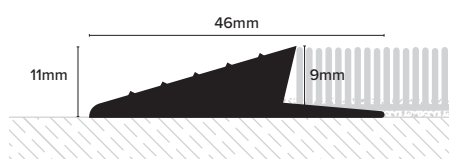

Code	Qty
RDIM90.16	10
RDIM90.43	10





Leading Crafters of Quality Spirits, Singapore

Project Specifications

Products Specified: KAA107

Colours: Bespoke Powder Coating - Black

Sector: Commercial

Project Description




A leading crafter of quality spirits embarked on a comprehensive renovation project to modernize its existing office space located in Singapore.

The primary objective was to create a sleek, contemporary aesthetic that would enhance the work environment, improve employee satisfaction, and align the office design with the company's innovative brand image. A key element of this renovation was the installation of bespoke powder coated aluminium skirting profiles.

A product which is ideal for use where a modern, hi-tech finish is required it was accompanied by end caps, junctions and internal/external corners and was turned around in a more than sufficient lead-time.

The design team selected bespoke powder coated aluminium skirting profiles for their modern appeal, durability, and customization options. These profiles were provided by Floorspec, a specialist contractor providing supply and installation service for resilient flooring. With strategic product expansion and business association, Floorspec has become one of the leading suppliers within the flooring industry.



This case study highlights the importance of selecting the right materials and partners for successful office renovation projects.

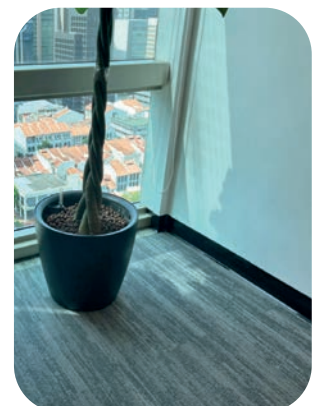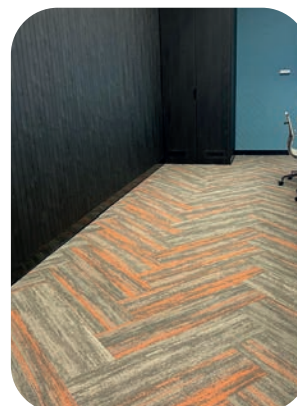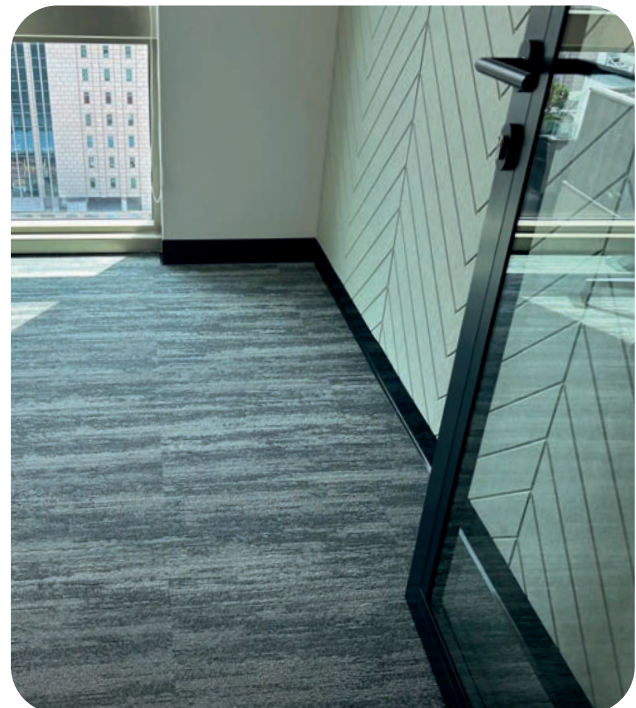



TCR Fast Fit Ramp

- TCR: Cover and drill fitting
- TCG: Multiflex Gripper Base for carpet installation
- TCC: Multiflex Universal Base for all other floor coverings
- TTG: Multiflex Set Cover and Gripper Base
- TTC: Multiflex Set Cover and Universal Base

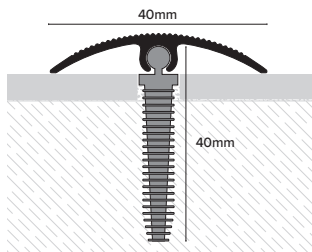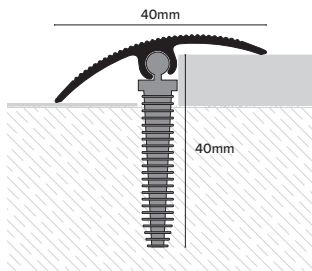

Pegs included with TCR



Code	Qty
TCR409.81	20
TCR409.83	20
TCR409.85	20
TCR409.87	20
TCR409.91	20

Code	Qty
TCR405.81	20

1.85m

Aluminium



0.92m



Max. 20mm



Fast Fit System



81

Matt Silver

83

Matt Brass

85

Pewter







87

Bright Brass

91

Bright Silver

Multiflex Set





Code	Qty
TTG409.91	20





Code	Qty
TTC409.91	20

Bases



Code	Qty
TCG109.80	20




Code	Qty
TCC109.80	20



**TCS Fast Fit Slimline**

- Covers a gap of up to 30mm
- TCS: Cover and drill fitting
- TCG: Multiflex Gripper Base for carpet installation
- TCC: Multiflex Universal Base for all other floor coverings



Code	Qty
TCS409.81	20
TCS409.83	20

Code	Qty
TCR405.81	20

1.85m

Aluminium


0.92m

**Fast Fit System****81**


Matt Silver

83



Matt Brass

Bases

Code	Qty
TCG109.80	20



Code	Qty
TCC109.80	20

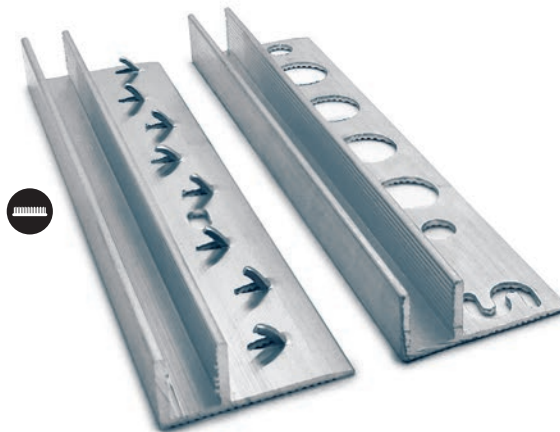**TSC Cover**

Code	W (mm)	Qty
TSC307.102	30	40
TSC407.102	40	40

**Stainless Steel**

2.7m





KAA Skirting



Aluminium



2.7m



17

Matt
Black

81

Matt
Silver

Skirting

60mm



Code	Qty
KAA607.17	10
KAA607.81	10

External Corners

Code	Qty
KPE600.11 PVC	10
KPE600.17 PVC	10
KEA600.81 ALU NEW	10

Internal Corners

Code	Qty
KPI600.11 PVC	10
KPI600.17 PVC	10
KIA600.81 ALU NEW	10

End Caps (L/R pair)

Code	Qty
KPC600.11 PVC	10
KPC600.17 PVC	10
KCA600.81 ALU NEW	10

80mm



Code	Qty
KAA807.81	10

Code	Qty
KPE800.11 PVC	10
KEA800.81 ALU NEW	10

Code	Qty
KPI800.11 PVC	10
KIA800.81 ALU NEW	10

Code	Qty
KPC800.11 PVC	10
KCA800.81 ALU NEW	10

100mm




Code	Qty
KAA107.81	10

Code	Qty
KPE100.11 PVC	10
KEA100.81 ALU NEW	10

Code	Qty
KPI100.11 PVC	10
KIA100.81 ALU NEW	10

Code	Qty
KPC100.11 PVC	10
KCA100.81 ALU NEW	10

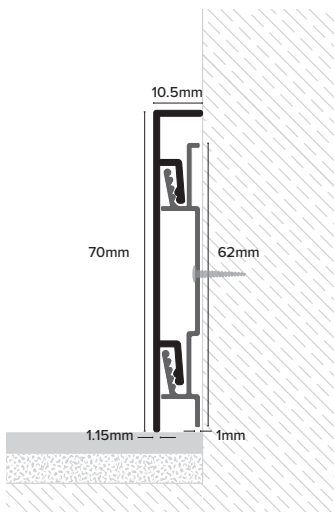

**KSC Clip On****NEW****Aluminium****2.7m****70mm**

Code	Qty
KSC710.81	10

External Corners




Code	Qty
KES710.81	10

Internal Corners

Code	Qty
KIS710.81	10

End Caps

Code	Qty
KSR710.81 Right	10
KSL710.81 Left	10

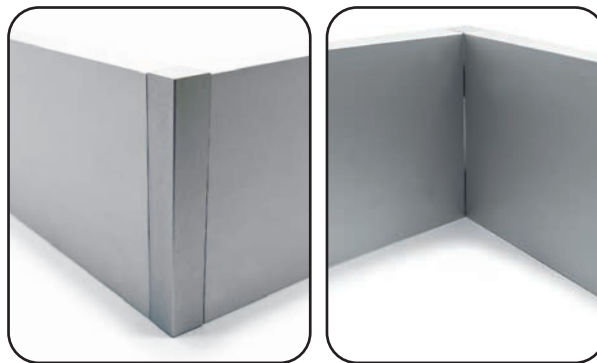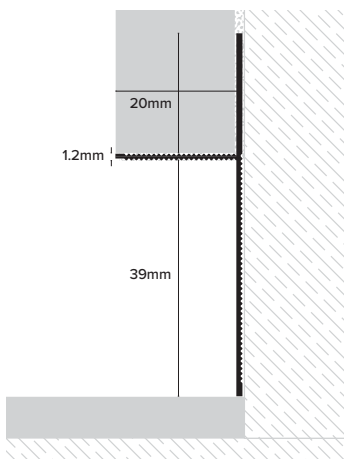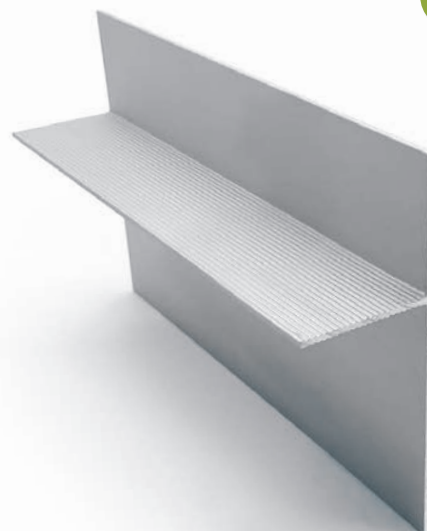**KSH Recess****NEW****Aluminium****2m****17**

Matt Black

81

Matt Silver


Code	Qty
KSH602.17	10
KSH602.81	10





Flexible Skirting

Sit On

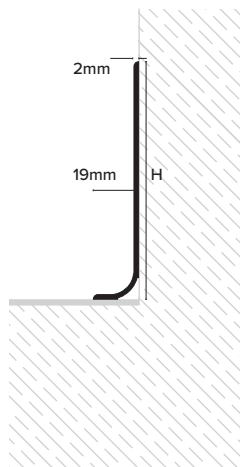

100mm 2m

Code	Qty
KS0100.16	30
KS0100.43	30

100mm 15m

Code	Qty
KS01015.16	2
KS01015.43	2

150mm 2m

Code	Qty
KS0150.16	20
KS0150.43	20



PVC




16

Black

43

Dolphin Grey



Set In

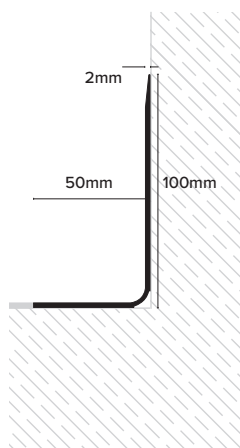

100mm 2m

Code	Qty
KSI100.16	20
KSI100.43	20

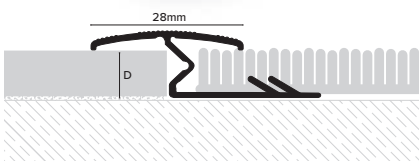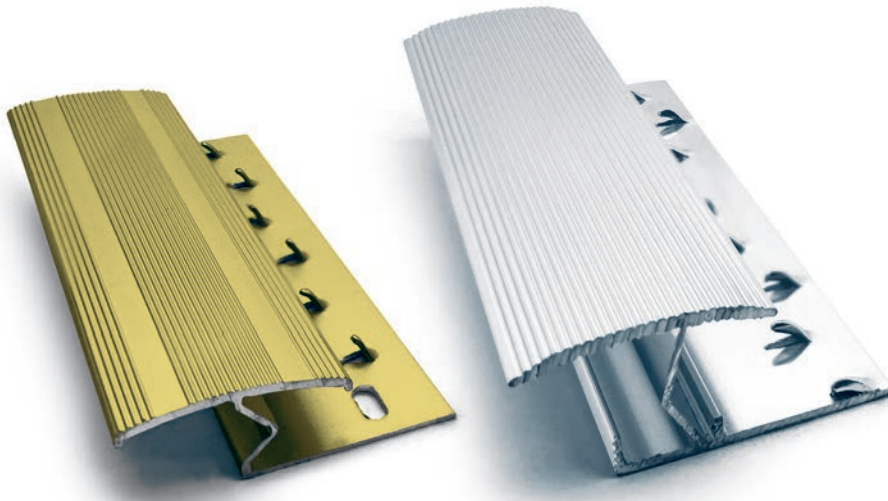

**TGA Z-Bar Carpet Lock & TGS Z-Bar Pro**

Code	Qty
TGA909.81	15
TGA909.83	15
TGA909.87	15
TGA909.91	15

9mm

0.9m

Code	Qty
TGA907.81	15
TGA907.91	15


9mm

2.7m

Code	Qty
TGA149.81	15
TGA149.83	15

14mm

0.9m

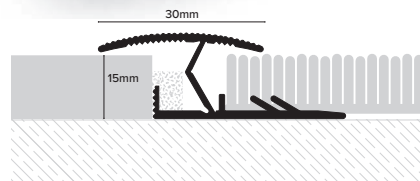

Code	Qty
TGS159.87	15
TGS159.91	15

15mm

0.9m

Aluminium**81**

Matt Silver

83


Matt Brass

87

Bright Brass

91

Bright Silver

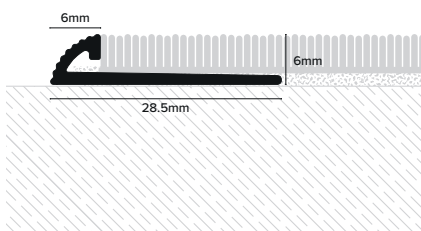CAR Carpet Tile Edge


Code	Qty
CAR060.80	20

Aluminium


2.5m




Vinyl to Tile



Code	D (mm)	Qty
EVC080.01	8	50
EVC080.11	8	50
EVC080.16	8	50
EVC100.01	10	50



Code	W x D (mm)	Qty
EVT080.01	15 x 8	25
EVT120.01	19 x 12	25



Code	Qty
EFU080.01	50



PVC



2.5m



01

White

11


Grey

16

Black



1

KCS Capping Strip


2m



Qty: 54



Code	Qty
KCS01.01	40
KCS01.16	40
KCS01.43	40

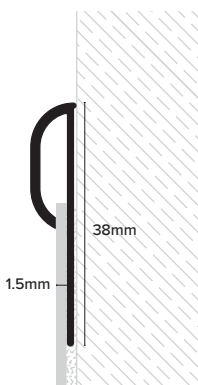

2m



Qty: 54



Code	Qty
KCS02.01	40
KCS02.16	40

25m



Qty: 16



Code	Qty
KCS0225.01	5
KCS0225.16	5
KCS0225.43	5

PVC




01

White

16


Black

43

Dolphin
Grey**KCOV** Flexible Cove Former

Code	Qty
KCOV2.16	30

Qty: 36



Code	Qty
KCOV1.16	30

Qty: 54



PVC



2m





Anytime Fitness, London

Project Specifications

Products Specified: **TrakMat® STOCKHOLM** and **RSA Aluminum Ramp**

Colours: **Anthracite**

Sector: **Leisure**

Project Description

Aluminium matting systems were required for two doorway entrances of busy gyms that endured high levels of foot traffic, on behalf of Anytime Fitness, Torsion Building Services approached their chosen distributor, DMS in Collingdale requesting advice for this project.


DMS recommended Luke Boorer of Genesis to the contractor, he guided the client through multiple product solutions along with the process from the templating service, right the way through to installation. With a strict time constraint of job completion required before Christmas, Luke advised that the quickest solution was the newly introduced interlocking aluminium Entrance Matting product **TrakMat® STOCKHOLM**. Luke calculated the required quantity of materials and advised on how to install the entrance matting, plus quoting the suitable ramp profiles which resulted in something both aesthetically pleasing and functional.

Further advice was necessary regarding the installation process, as one of the mats was over two meters wide, exceeding the channel length for this product, the recommendation was to install the mat in three sections with an even split either side, using Genesis trim to create the mat areas.

The installation process has been described as very easy as the interlocking system was simple to use and did not require for any joints to be forced together. "We simply used a jigsaw for the small cuts and a chop saw to cut the sides down. This was also added by the expert advice that Luke gave us".

All of the materials were delivered to site within a few days of ordering facilitating installation to meet this project deadline.

"The project has been a wonderful success from Luke offering us all the information that we needed, right up to the installation process. The managers of the branches are delighted with the outcomes and things could not have gone any smoother"

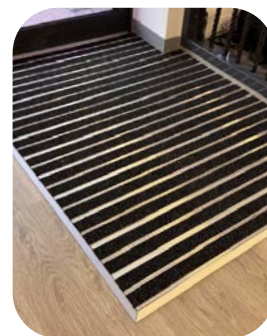


TrakMat®
STOCKHOLM

Entrance Systems



Genesis
The Perfect Finish

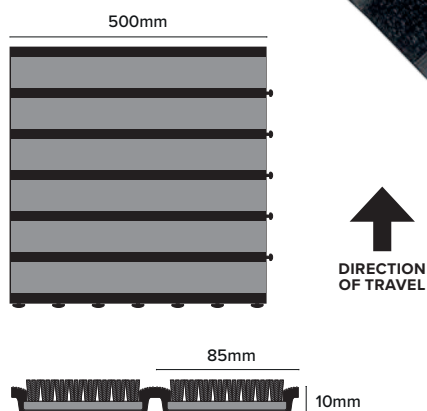**TrakMat®****BARCELONA****Code**
EM9200

Interlocking

Closed
Construction

Internal

Medium-Heavy &
Light WheeledOffices / Schools
Apartments2.5 kg/m²

PVC



500mm




500mm



D: 10mm

8 Tiles
2m²

Anthracite

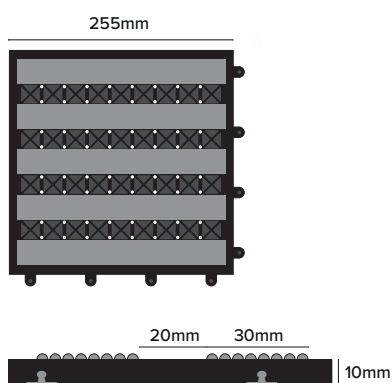TrakMat®**NEW****OSLO****Code**
EM5200

Interlocking

Closed
ConstructionInternal /
ExternalMedium-Heavy &
Light WheeledOffices / Schools
Apartments2.5 kg/m²

PVC



250mm



250mm






D: 10mm

16 Tiles
1m²

Anthracite



TrakMat® STOCKHOLM

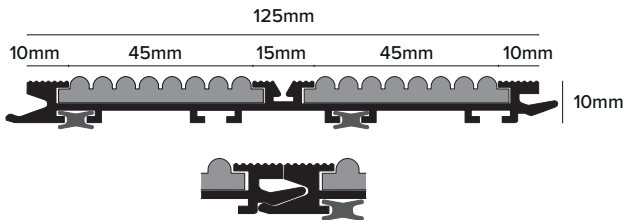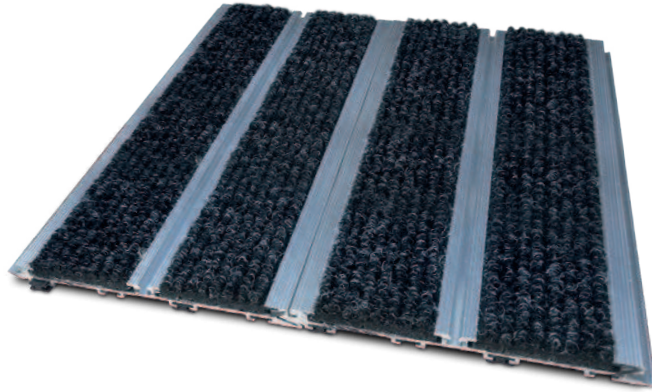

Code	
EM1200	Anthracite
EM1201	Grey
EM1202	Natural
EM1203	Red

Interlocking



Closed Construction



Internal



Heavy & all wheeled traffic



Apartments / Offices Infrastructure



10 kg/m²



Aluminium



2m



125mm



D: 10mm



8 Pieces
2m²



Anthracite



Grey




Natural



Red

TrakMat® LYON



Code	
EM8550	

Self-Adhesive



Open Modular Construction



Internal



Medium & Light Wheeled



Schools / Offices / Supermarkets



5.7 kg/m²



Polyamide



750mm



235mm




D: 14mm



6 Tiles
1m²



Anthracite


TrakMat®
LONDON


*Cut to required width, up to 39mm.

End Cap

Code

EMCAP12 Rubber

Max. length 4 metres

Loop Pile

Code

EM8900 Anthracite

EM8901 Grey

EM8902 Natural

EM8903 Red

Internal

D: 10mm

Code

EM8910 Anthracite

EM8911 Grey

EM8912 Natural

EM8913 Red

Internal

D: 12mm

Code

EM8920 Anthracite

EM8921 Grey

EM8922 Natural

EM8923 Red

Internal

D: 17mm

Rubber

Code

EM8950

External

D: 10mm

Code

EM8951

External

D: 12mm

Code

EM8952

External

D: 17mm

Open Rollable
Construction



Medium-Heavy &
Light Wheeled



Offices / Schools
Apartments



Aluminium



Made to
Measure



Black
Rubber



Anthracite



Grey




Natural



Red



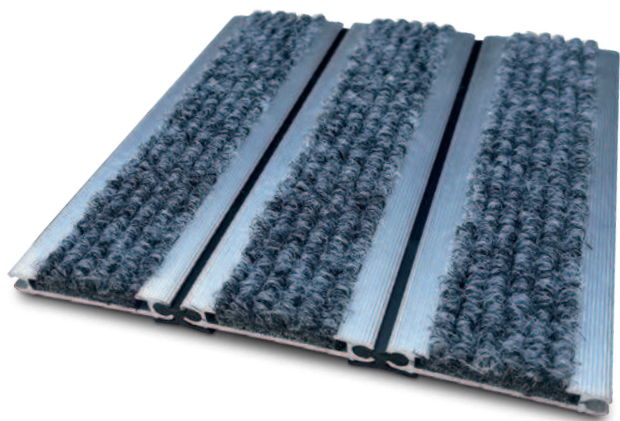

Code	
EM2410	Anthracite
EM2411	Grey
EM2412	Natural
EM2413	Red

Supply & Fit



Aluminium



Closed Rollable
Construction



D: 12mm



Internal



Made to
Measure



Medium-Heavy &
Light Wheeled



Apartments / Offices
Infrastructure



12 kg/m²



Anthracite





Grey



Natural




Red

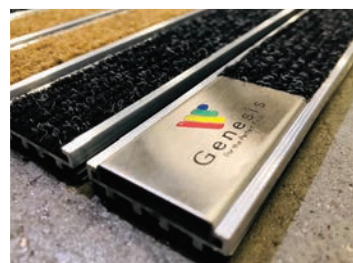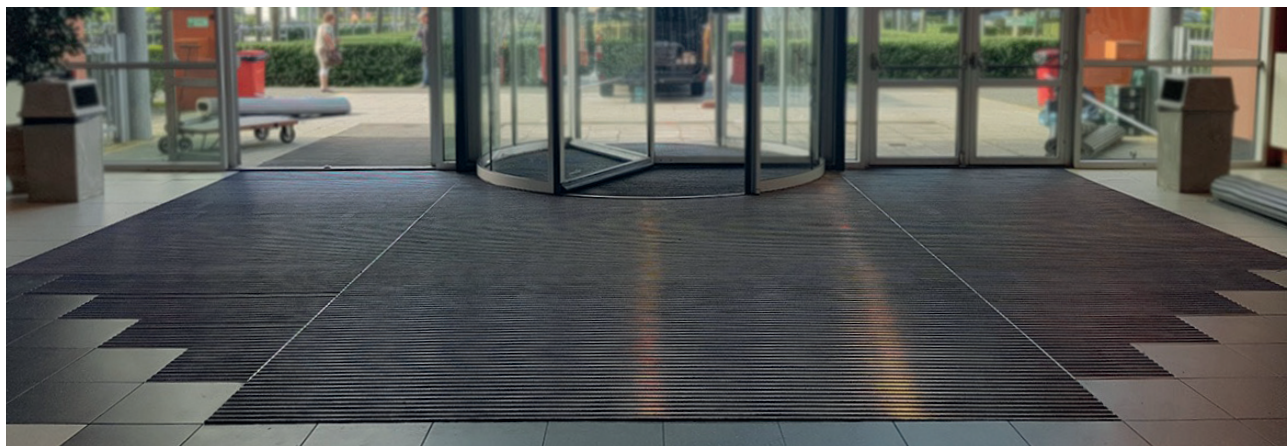



TrakMat® TOKYO



D: 17mm

D: 22mm

Code	
EM2030	Anthracite
EM2031	Grey

Code	
EM2250	Anthracite
EM2251	Grey

Supply & Fit



Closed Construction



Internal



Heavy & light wheeled traffic



Offices / Schools
Apartments
Supermarkets



Aluminium



Made to Measure





Anthracite



Grey

TrakMat® NEW YORK

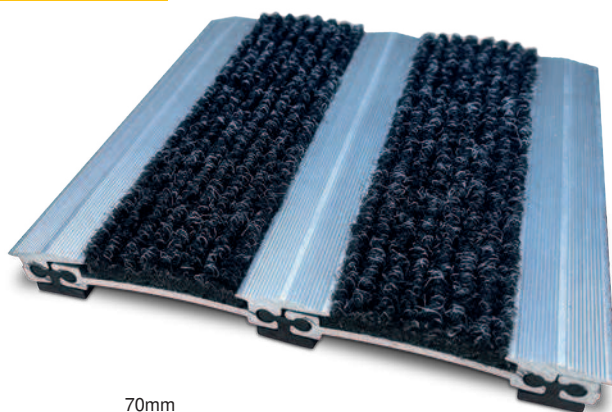

D: 15mm

D: 19mm

Code	
EM8020	Anthracite
EM8021	Grey
EM8022	Natural
EM8023	Red

Code	
EM8240	Anthracite
EM8241	Grey
EM8242	Natural
EM8243	Red

Supply & Fit



Closed Construction



Internal



Extreme & all wheeled traffic



Supermarkets
Shopping Centres
Infrastructure / Schools



Aluminium



Made to Measure



Anthracite



Grey



Natural





Red



TrakMat®

AMSTERDAM

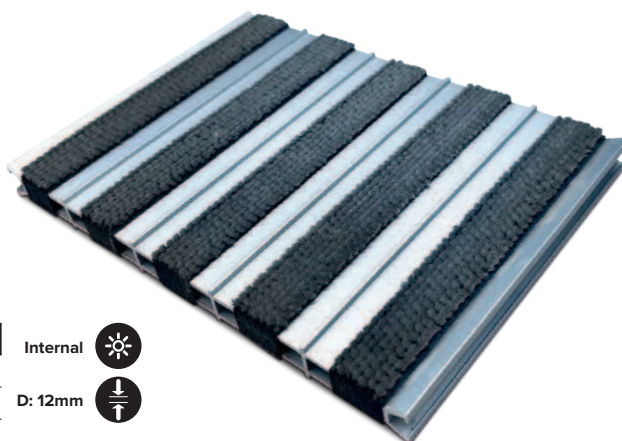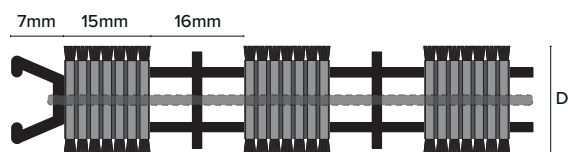

Superior Buffed

Code		Internal	
EMR8002	Grey		
EMR8003	Black	D: 12mm	

Code		Internal	
EMR8000	Grey		
EMR8016	Black	D: 18mm	



Rubber

Code		External	
EMR8030		D: 18mm	

Closed Construction



Heavy Traffic



Shopping Centres
Infrastructure / Schools



Aluminium



Made to Measure



Black Rubber



Black




Grey

TrakMat®

ROTTERDAM

NEW

Superior



Code

EMBS2820M 785 x 475

EMBS2820L 900 x 475

EMBS2820C Custom*

*State size when ordering



Open Construction



External



Heavy & light wheeled traffic



Offices / Schools
Apartments
Supermarkets



PVC



Made to Measure*



Customise



22mm




TrakMat®

ROTTERDAM

NEW

Domestic

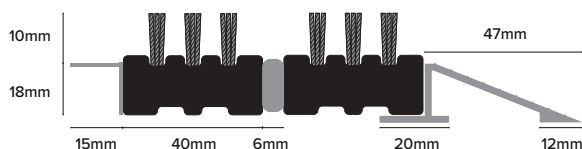

Code

EMBD2830 750 x 400 mm

EMBD2831 750 x 400 mm

Open Construction



External



Heavy & light wheeled traffic



Offices / Schools
Apartments
Supermarkets




PVC




Qty: 80



28mm



Wayfinding & Guidance

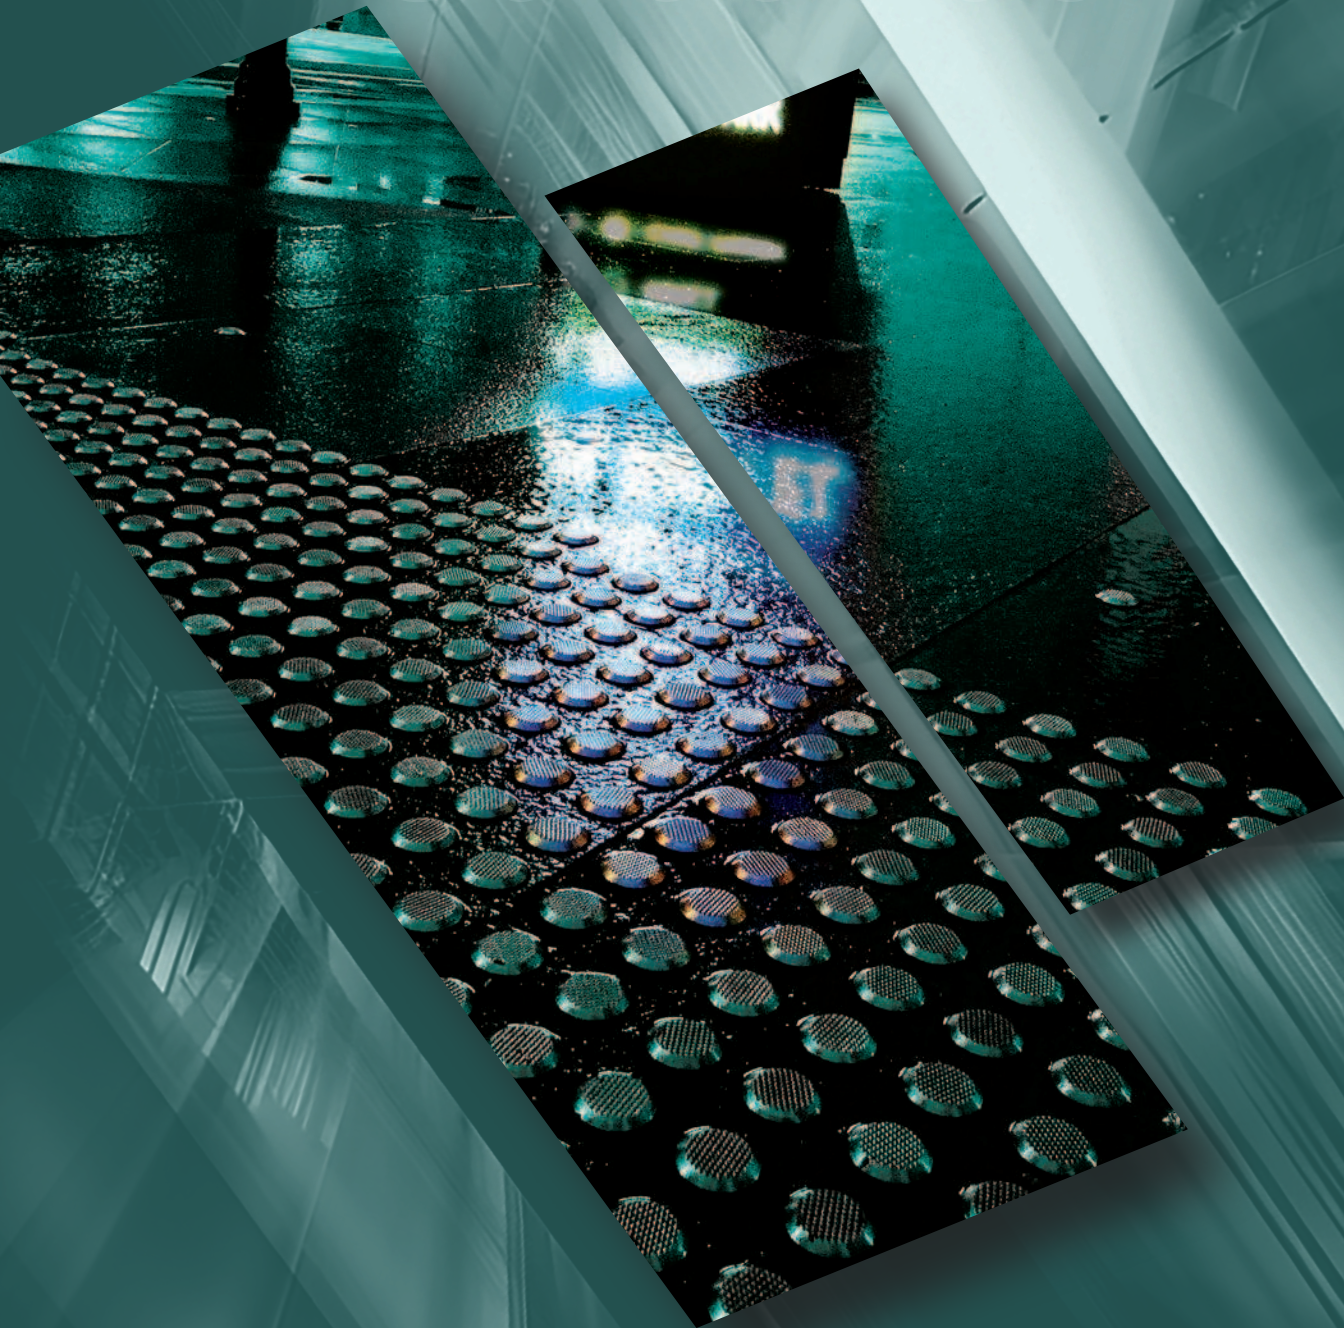


Genesis
The Perfect Finish




3M Discs



Code	Qty
FTSAS25.01	500



Code	Qty
FTSAS25.16	500



Code	Qty
FTSAS25.47	500



Code	Qty
FTSSA25.17	500



Code	Qty
FTSSA25.84	500



Code	Qty
FTSCA25.84	500



35mm

Code	Qty
FTSSA35.84	500

35mm

Code	Qty
FTSCA35.84	500

Mandatory preparation for 3M Discs

Stainless Steel

25mm

3M


Internal

PATHWAY
GUIDANCE SYSTEM



Shanked Discs



Code	Qty
FTSSD25.01	250



Code	Qty
FTSSD25.16	250



Code	Qty
FTSSD25.47	250



Code	Qty
FTSCD25.84	250



Code	Qty
FTCHD25.84	250

35mm

Code	Qty
FTSCD35.84	250


35mm

Code	Qty
FTCHD35.84	250

Stainless Steel

25mm

Internal / External

PATHWAY
GUIDANCE SYSTEM




3M Corduroys



Mandatory preparation for 3M Corduroys

Code	Qty
FTCA280.01	100
FTCA280.16	100
FTCA280.47	100

Code	Qty
FTGA280.84	100

Code	Qty
FTGA280.17	100

Stainless Steel



280mm



25mm




3M




Internal



PATHWAY
GUIDANCE SYSTEM



Shanked Corduroys

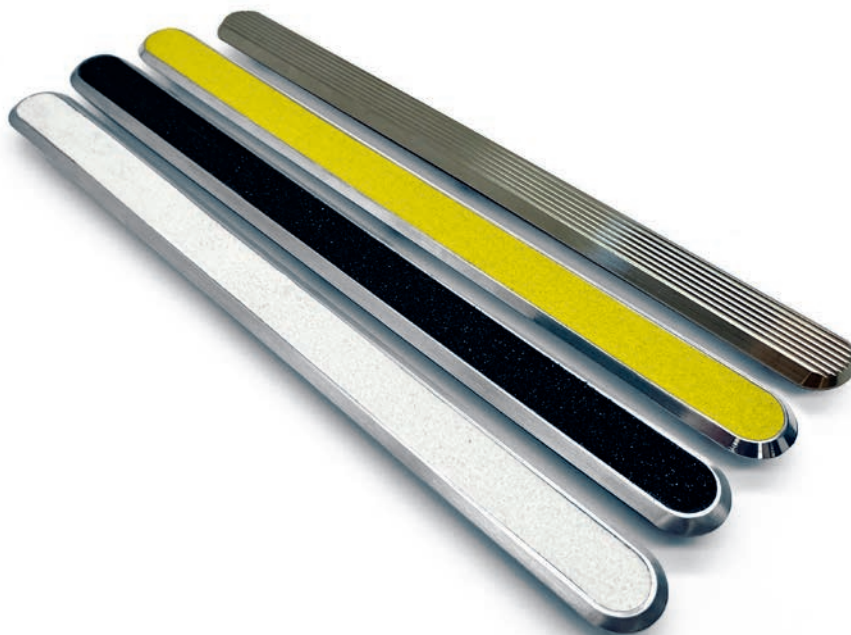

Code	Qty
FTCD280.01	50
FTCD280.16	50
FTCD280.47	50

Code	Qty
FTGD280.84	50

Stainless Steel



280mm




25mm



Internal / External



PATHWAY
GUIDANCE SYSTEM







Tactile Layout Example

BS ISO 23599:2019

***5.1.2.4 Spacing (Attention patterns)


Where the top diameter of the truncated stud is 19mm the spacing from centre to centre is recommended as 49-67mm

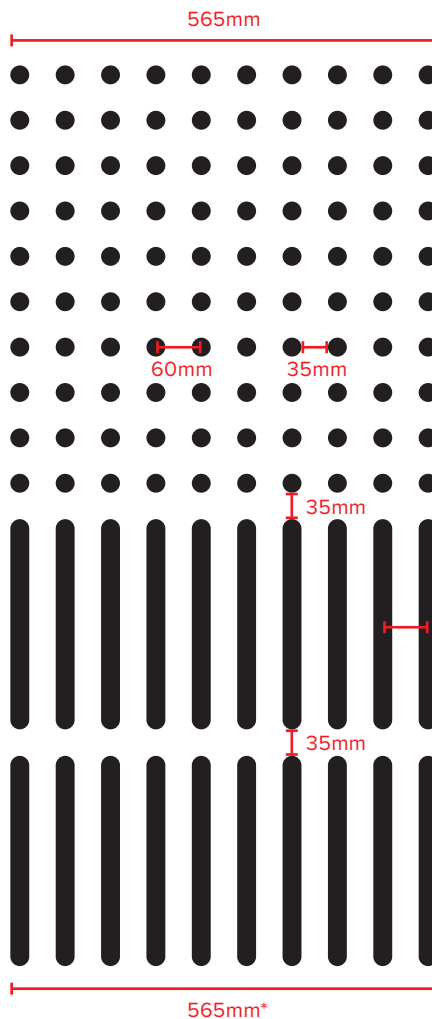

BS ISO 23599:2019

5.5.4 Principles for installation of guiding patterns

When a guiding pattern is used to designate a path of travel, it shall have a minimum effective width of 250 mm.



Ø25mm


BS ISO 23599:2019

*5.5.4 Principles for installation of guiding patterns

Where a guiding pattern of TWSIs needs to be detected by a person approaching at an angle, it shall have a minimum effective width of 550 mm.

**5.1.3.2.3 Spacing (guiding patterns)

Where the top width of the flat corduroy is 19mm the spacing from centre to centre is recommended as 59-80mm

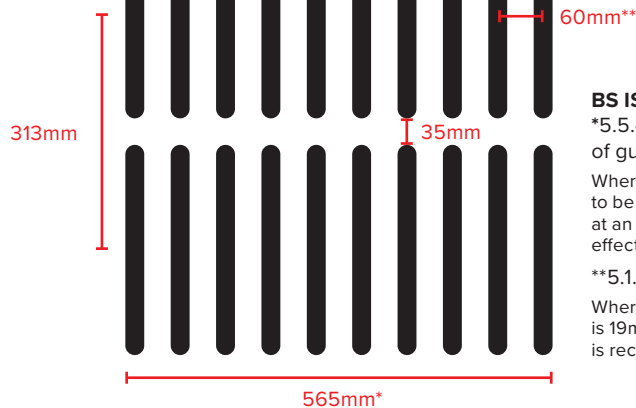

PATHWAY
GUIDANCE SYSTEM

NIW Safety Strip

Code	Qty
NIW250.16	10
NIW250.47	10
NIW250.120	10

25mm

Code	Qty
NIW500.16	10
NIW500.47	10
NIW500.120	10

50mm



Silicone Carbide

18.3m

#60 Grit

16

Black

47

Yellow

120


Hazard

Customisation





Genesis
The Perfect Finish


Vision Medium Gold

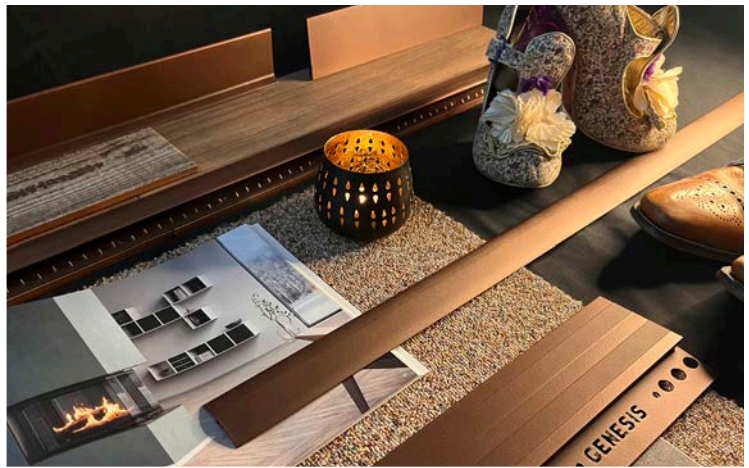

Floor Trims & Transitions Copper Bronze

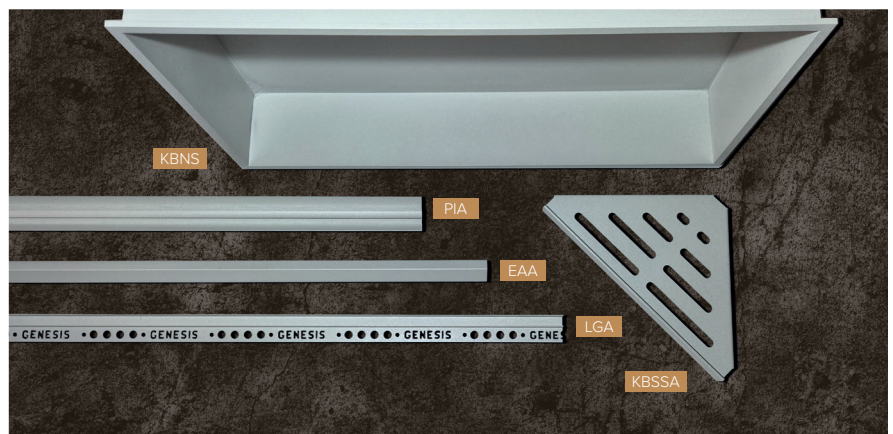

Kitchen & Bathroom Chalkstone

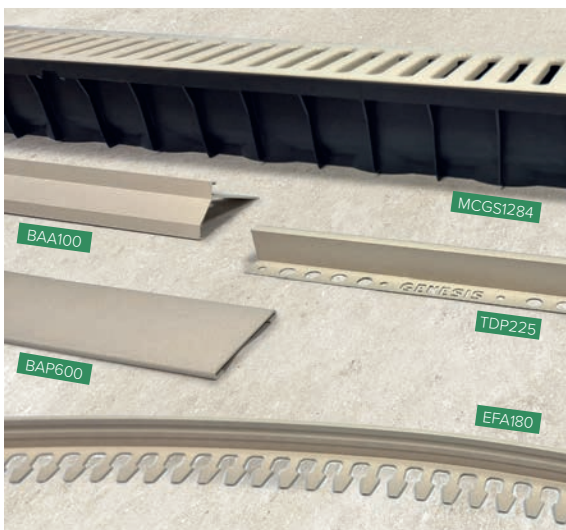

Outdoor, Balcony & Landscaping Sandstone





Selection Process

There is a hugely expansive selection of colours available with powder coating. Our range comprises the complete RAL K7 Fan Deck, plus the Anodic, Stone and Black range of finishes shown, resulting in over 350 colour options.



Colour Matching & Bespoke Options

Samples can be requested for any of the above quoted 350+ colour options, just send us your wall or floor covering, and we can scan it as shown, then present to you the most suitable colours to match.

In the event that there are no suitable solutions from these options, we can have a bespoke powder made as an exact match to the colour of your wall or floor covering, but MOQs and additional costs will apply.



Suitability for Water

The powder coated range of products are suitable for kitchens, bathrooms, and environments which can be maintained and cleaned with normal soap-based cleaning products.

It is difficult to track whether recommended chlorine levels are adhered to in swimming pools, therefore, we advise that they can be installed in a splash zone, but not fully submerged.



Base Material

Except for PVC, all base materials are suitable for powder coating, regardless of their surface finish. Natural mill aluminium or anodised/ powder coated to a different finish, it can be re-coated.



Durability

Powder-coated finishes are incredibly durable, they provide UV stability, offer high chemical and corrosion resistance, and, along with being waterproof, are considered suitable for outdoor use.



Jigging



All profiles are hung on a jig to be powder-coated, so if they do not have an unseen area, such as a punched flange for the profile to be hung, the profile may need to be drilled on the ends and then cut. The profile would then be supplied marginally shorter than the full length, typically by 2cm in total.



Self-Adhesive

Genesis profiles which are noted as Self Adhesive are not suitable for powder coating.

Stair Nosings, TrakMat, Floor Trims & EFA Bright Brass

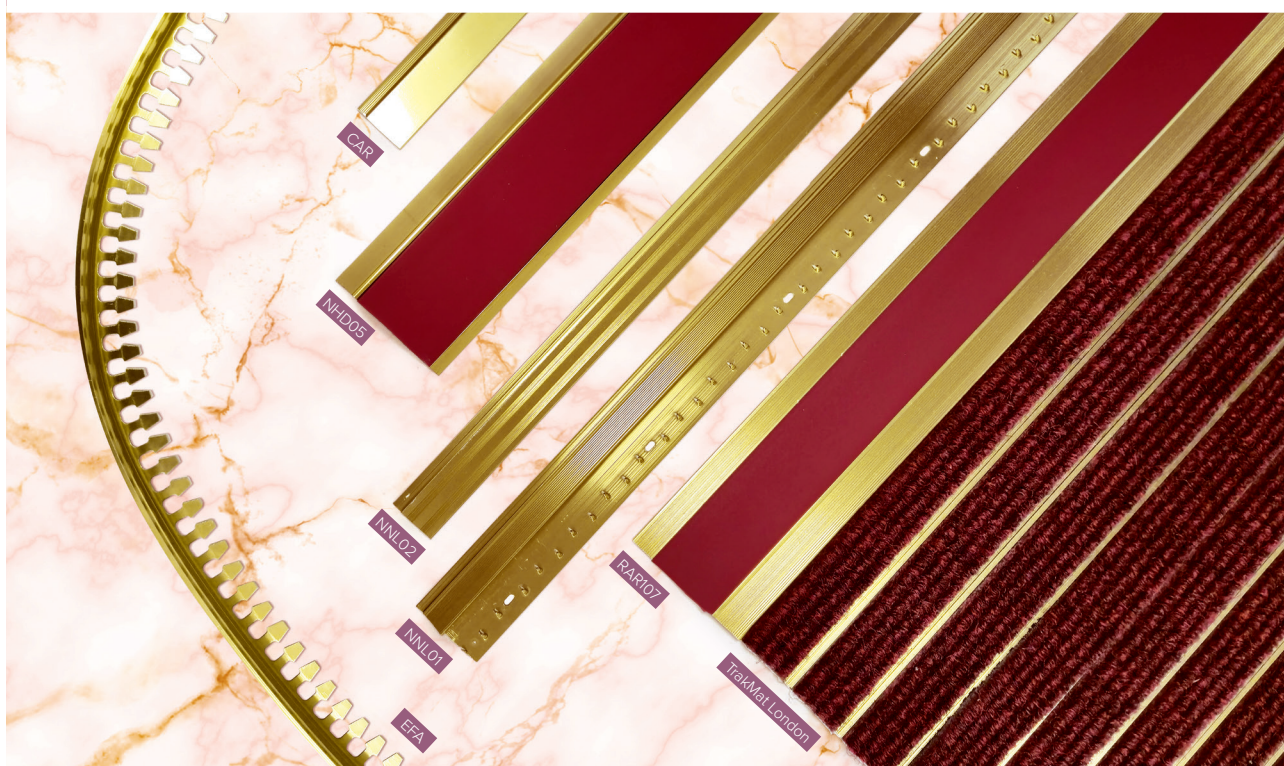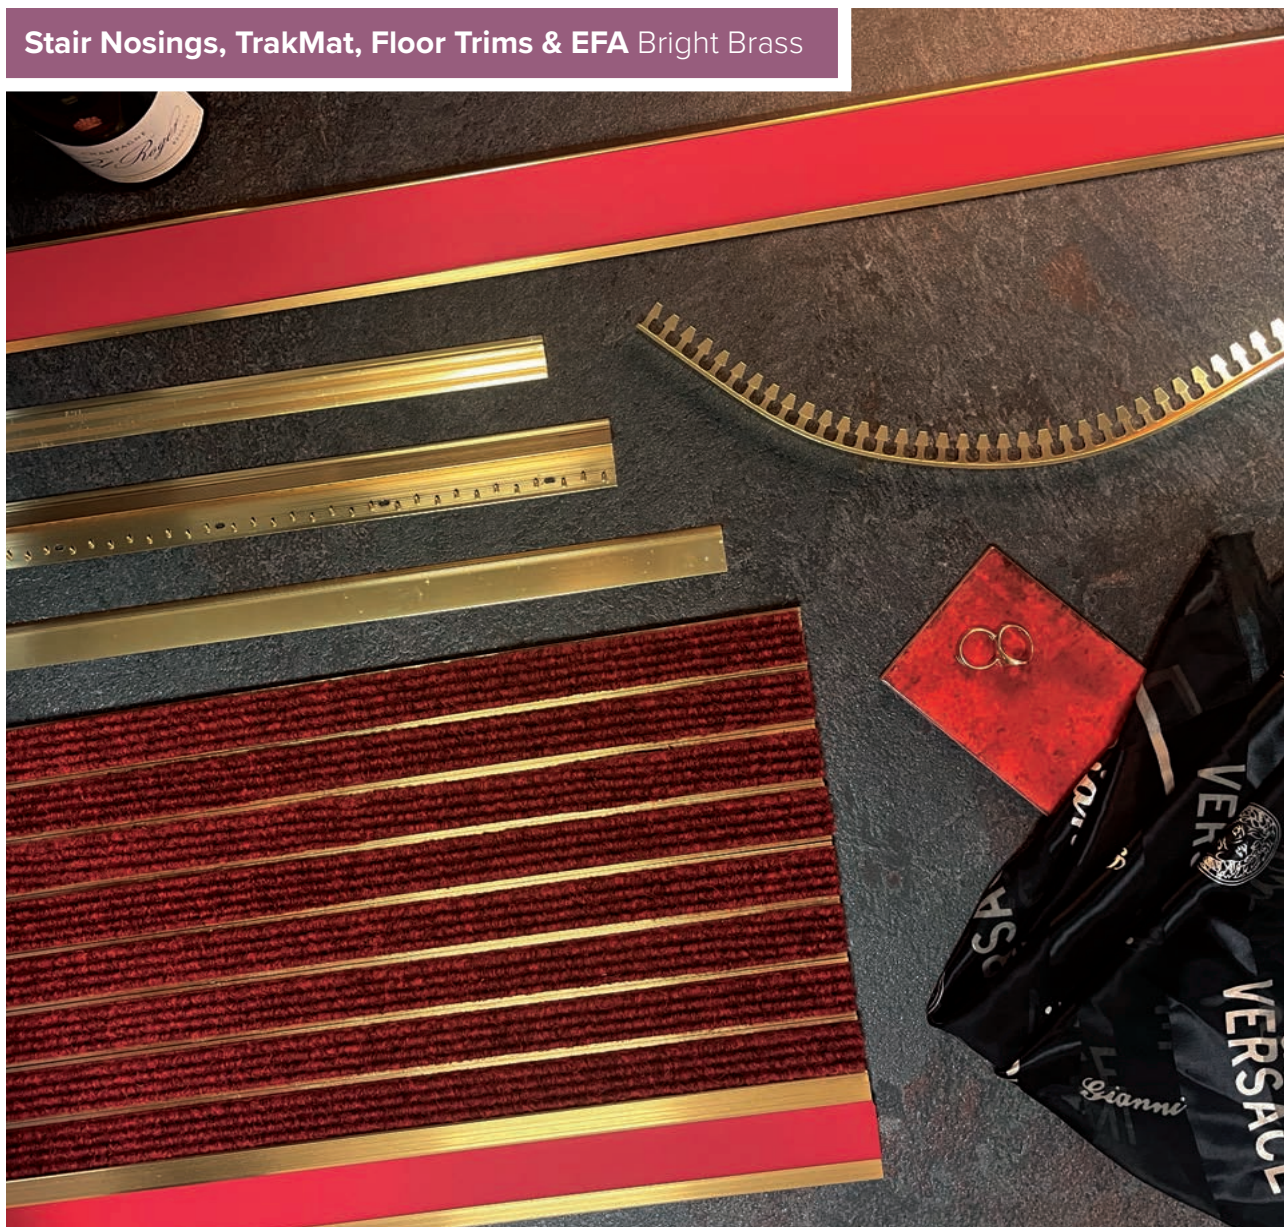



Base Material

Mill Aluminium is the sole suitable base material for Anodising



Durability

Anodised finishes provide strong durability and create a corrosion-resistant oxide layer, however, they do not offer full UV stability, so the surface finish is susceptible to change in an outdoor environment.



Self-Adhesive

Genesis profiles which are noted as Self Adhesive are not suitable for anodising.



Selection Process

Anodised finishes come in the form of Bright and Satin, the colours available are Silver, Brass and Bronze.



Suitability for Water

Products are suitable for kitchens, bathrooms, and environments which can be maintained and cleaned with normal soap-based cleaning products.

It is difficult to track whether recommended chlorine levels are adhered to in swimming pools, therefore, we advise that they can be installed in a splash zone, but not fully submerged.



Jigging

All profiles are hung on a jig to be anodised, so if they do not have an unseen area, such as a punched flange for the profile to be hung, the profile may need to be drilled on the ends and then cut. The profile would then be supplied marginally shorter than the full length, typically by 2cm in total.



Restrictions

The maximum length for a Bright anodised finish is 2.4m, the maximum length for a Satin finish is 6m.